

REF. 10504

FEATURES

- IP:** 43
- Installation:** Recessed
- High:** 110 mm
- Light Direction:** Fixed
- Minimum height required:** 130 mm
- Minimum distance to lightened objects:** 0.5 m
- Lamps :** LED
- Protection class:** Class I
- Indirect light:** Optional
- Cut out:** M1 1000x235 mm / M2 1995x235 mm

LED MODULES


STANDARD POWER - HIGH POWER

- Efficiency 3K:** 132 lm/W
- Efficiency 4K:** 136 lm/W
- Energy efficiency:** A++
- Driver:** Included
- Life time:** 50.000h
- LED working constant current:** 350mA
- Color rendering current:** CRI ≥80
- LED Guarantee:** 5 years

CRISMOSIL PROFILE

10504.M1	995 mm	4.45 kg
10504.M2	1990 mm	8.90 kg

OPTIC COVER



OPAL



MICROPRISMATIC



ICE

COLOR TEMPERATURE

2700K

3000K

4000K

DIMMABLE OPTIONS

1..10V




PUSH

DALI



COVER KIT

CK08

MEASURES

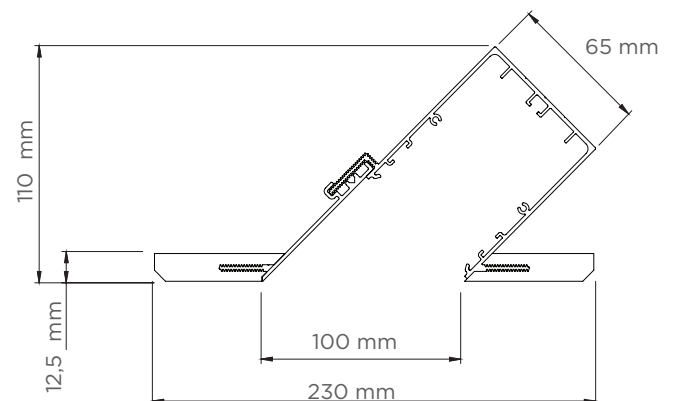

REF. 10504

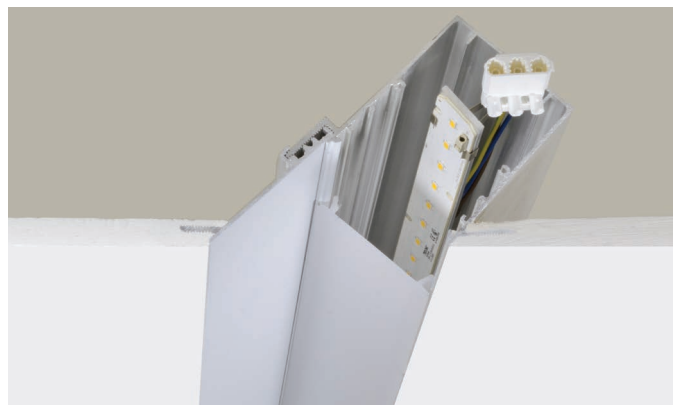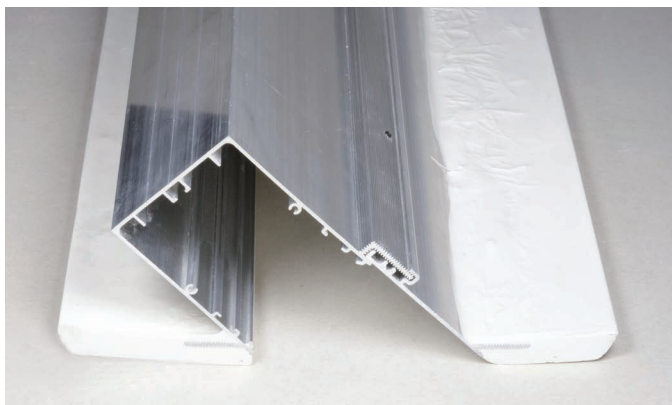

ELECTRIC SYSTEM

STANDARD POWER

Led modules	L	Power	Lm 3000K/4000K
11520.01M.STD	422 mm	9,3 W	1240/1280 lm
11520.02.STD	562 mm	12,4 W	1640/1680 lm
11520.02M.STD	703 mm	15,5 W	2060/2120 lm
11520.03.STD	843 mm	18,6 W	2460/2520 lm
11520.03M.STD	984 mm	21,7 W	2880/2960 lm
11520.04.STD	1124 mm	24,8 W	3280/3360 lm
11520.04M.STD	1265 mm	27,9 W	3700/3800 lm
11520.05.STD	1405 mm	31 W	4100/4200 lm
11520.05M.STD	1546 mm	34,1 W	4520/4640 lm
11520.06.STD	1686 mm	37,2 W	4920/5040 lm
11520.06M.STD	1827 mm	40,3 W	5340/5480 lm
11520.07.STD	1967 mm	43,4 W	5740/5880 lm
11520.07M.STD	2108 mm	46,5 W	6160/6320 lm
11520.08.STD	2248 mm	49,6 W	6560/6720 lm
11520.08M.STD	2389 mm	52,7 W	6980/7160 lm
11520.09.STD	2529 mm	55,8 W	7380/7560 lm
11520.09M.STD	2670 mm	58,9 W	7800/8000 lm
11520.10.STD	2810 mm	62 W	8200/8400 lm
11520.10M.STD	2951 mm	65,1 W	8620/8840 lm
11520.11.STD	3091 mm	68,2 W	9020/9240 lm

HIGH POWER

11520.01M.HI	422 mm	17,6 W	2320/2390 lm
11520.02.HI	562 mm	22,8 W	3000/3100 lm
11520.02M.HI	703 mm	29 W	3820/3940 lm
11520.03.HI	843 mm	34,2 W	4500/4650 lm
11520.03M.STD	984 mm	40,4 W	5320/5490 lm
11520.04.HI	1124 mm	45,6 W	6000/6200 lm
11520.04M.HI	1265 mm	51,8 W	6820/7040 lm
11520.05.HI	1405 mm	57 W	7500/7750 lm
11520.05M.HI	1546 mm	63,2 W	8320/8590 lm
11520.06.HI	1686 mm	68,4 W	9000/9300 lm

Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com