



SU CLASSIC

PRODUCT SHEET



REF. 3023 / 3025

FEATURES

- IP:** 65
- Installation:** Recessed with frame
- Light Direction:** Fixed
- Minimum distance to lightened objects:** 0.5 m

LED

- Power:** 16W
- Efficiency 3K:** 1700 lm
- Efficiency 4K:** 1790 lm
- Energy efficiency :** A+
- Driver:** Included
- Life time:** 50.000h
- LED working constant current:** 500mA
- Color rendering current:** CRI ≥80
- LED Guarantee:** 5 years

FINISH

- STRIPED ALUMINUM
- WHITE RAL 9016


REFLECTOR

- 40°
- 60°

DIMMABLE OPTIONS

- 1.10V
- PUSH
- DALI
- PHASE CUT

MEASURES

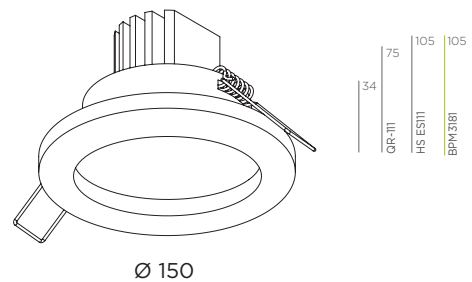

Ø 125 mm
 MAX 75W GU10 □ ○ 3023GU ○ 3025GU
 MAX 100W G53 □ ○ 3023 ○ 3025
 LED SPM 3181 MAX 16W 3000K 1700 lm 500 mA 4000K 1790 lm INC. □ ○ 3023LED ○ 3025LED