


MINI ROCKER



REF. 20174.01

MAX 1x8W | 27K - 348 lm | 3K - 362 lm
4K - 421 lm | 700 mA


95x97 mm

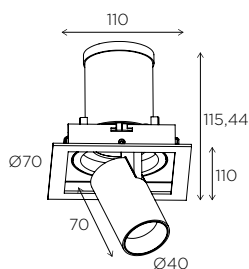

REF. 20174.02

MAX 2x8W | 27K - 696 lm | 3K - 724 lm
4K - 842 lm | 700 mA

226x97 mm



Configuration: REF +

Color finish - Acabado

White - Blanco .W Black - Negro .BK

Color Temperature - Temperatura de color

2700K .27K 3000K .3K

4000K .4K

Reflector

15° .D15 24° .D24

38° .D38

Dimmable options - Opciones de regulación

1..10V .D1 DALI .DA

Push - Pulsador .PU

Tiltable
Ajustable

45°


Oscillating
Oscilante



350°




REF. 20174.03

MAX 3x8W | 27K - 1044 lm | 3K - 1086 lm
4K - 1263 lm | 700 mA

 356x97 mm

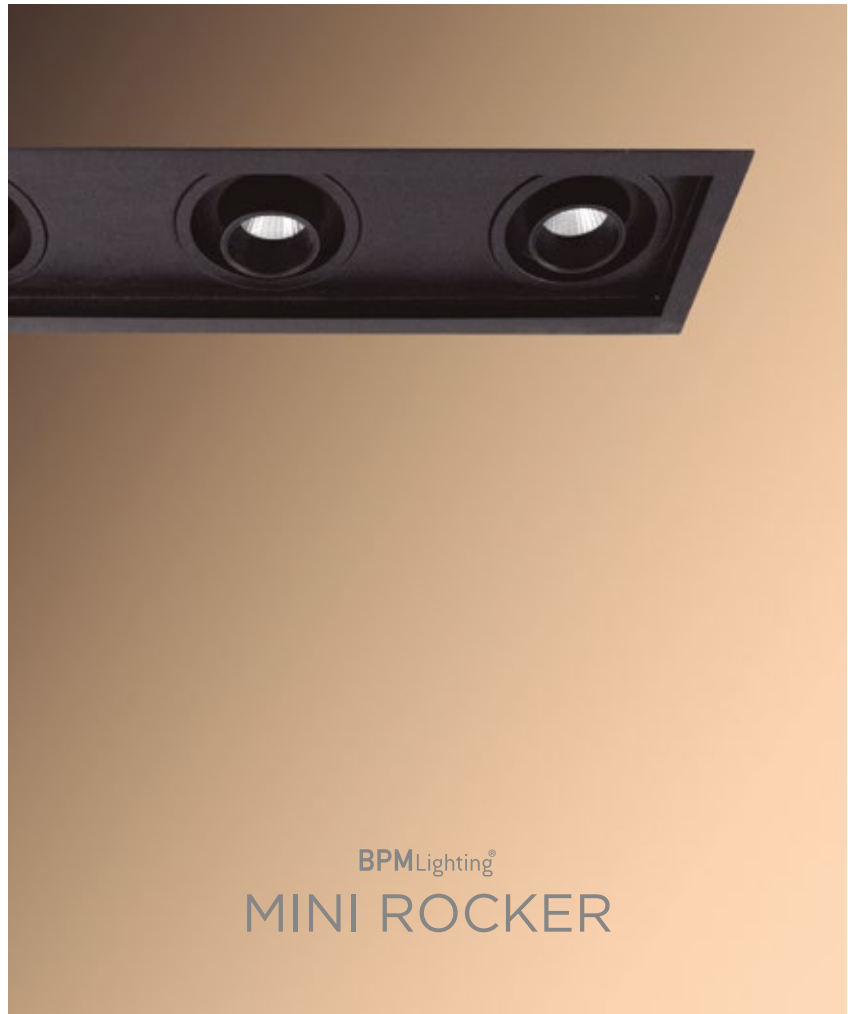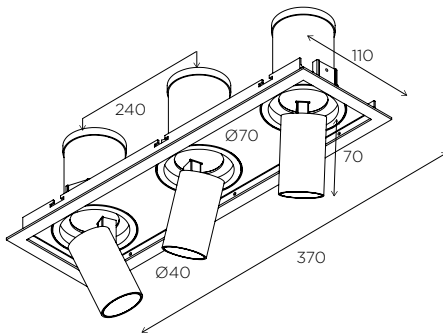


PHOTOMETRY - FOTOMETRÍA

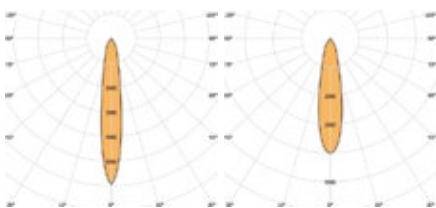

.D15

.D24



.D38



You can find all photometry data in our web.

Puedes encontrar todas las fotometrías en nuestra web.

BPMLighting®
MINI ROCKER


MICRO ROCKER



REF. 20173.01

MAX 1x2 W | 27K - 109 lm | 3K - 121 lm
4K - 134 lm | 700 mA



87x78 mm

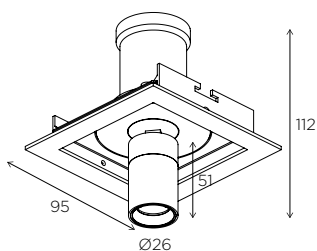

REF. 20173.02

MAX 2x2 W | 27K - 218 lm | 3K - 242 lm
4K - 268 lm | 700 mA

87x167 mm

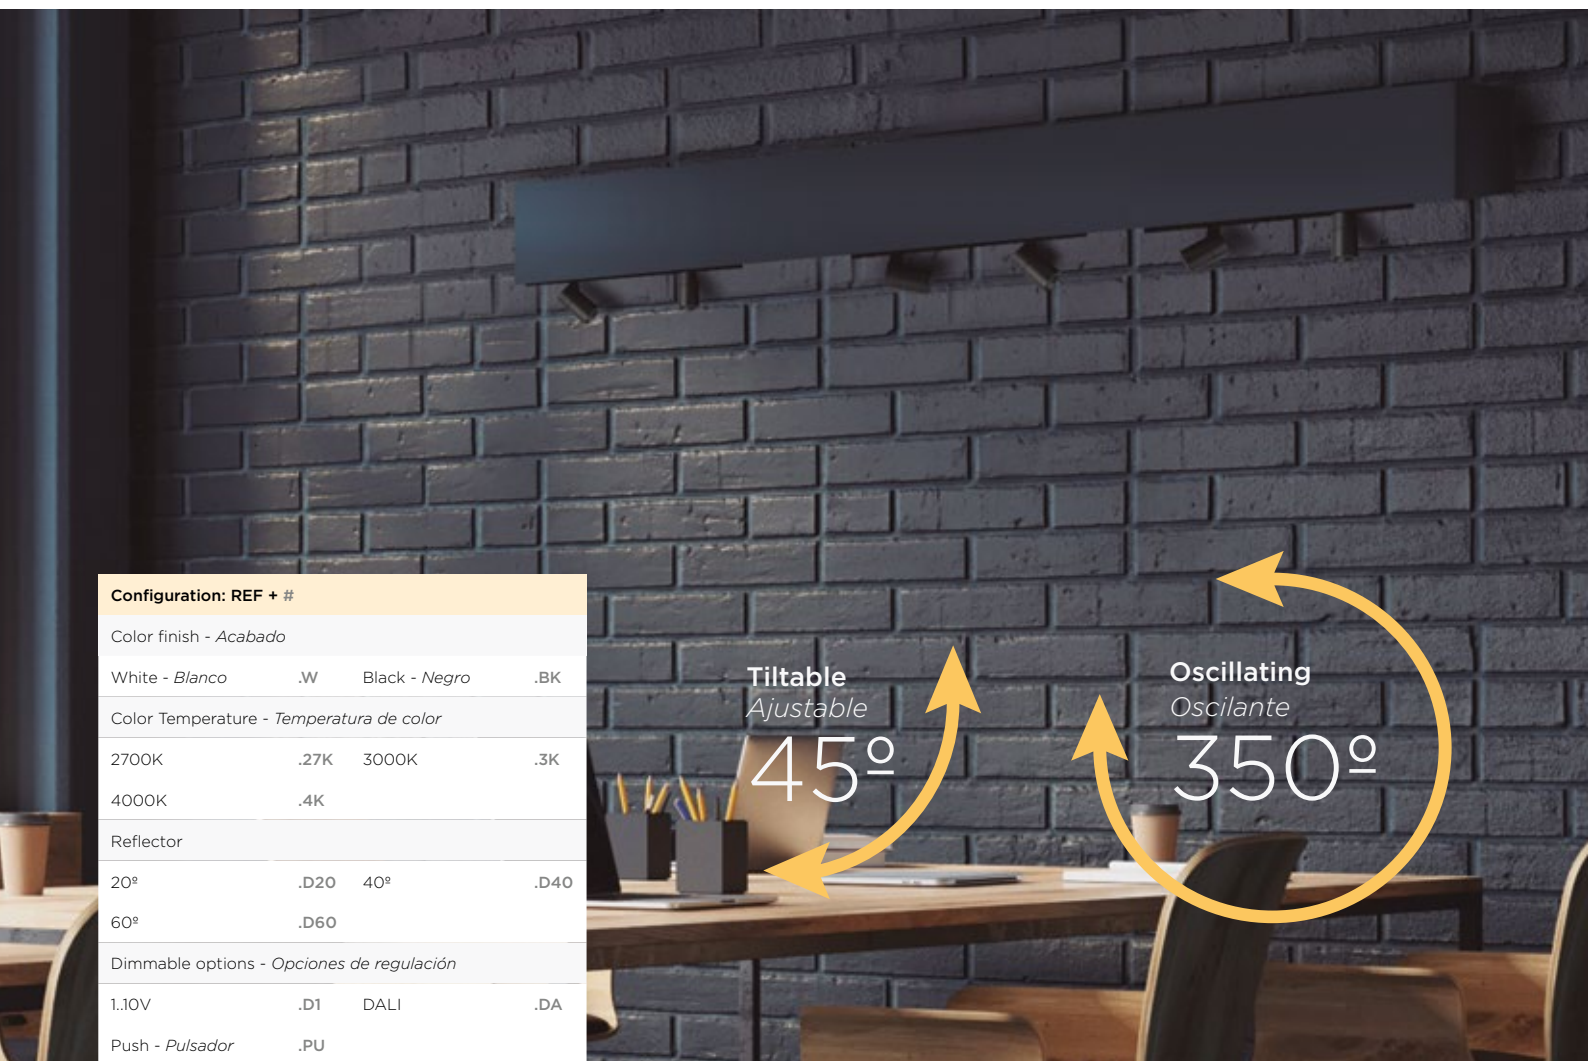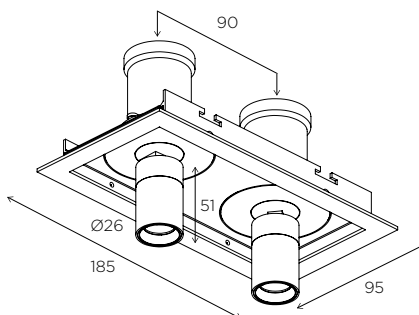

Configuration: REF +

Color finish - *Acabado*

White - *Blanco* .W Black - *Negro* .BK

Color Temperature - *Temperatura de color*

2700K .27K 3000K .3K

4000K .4K

Reflector

20° .D20 40° .D40

60° .D60

Dimmable options - *Opciones de regulación*

1..10V .D1 DALI .DA

Push - *Pulsador* .PU

Tiltable
Ajustable

45°

Oscillating
Oscilante


350°



REF. 20173




REF. 20173.02

MAX 3x2 W | 27K - 327 lm | 3K - 363 lm
4K - 408 lm | 700 mA

 87x256 mm

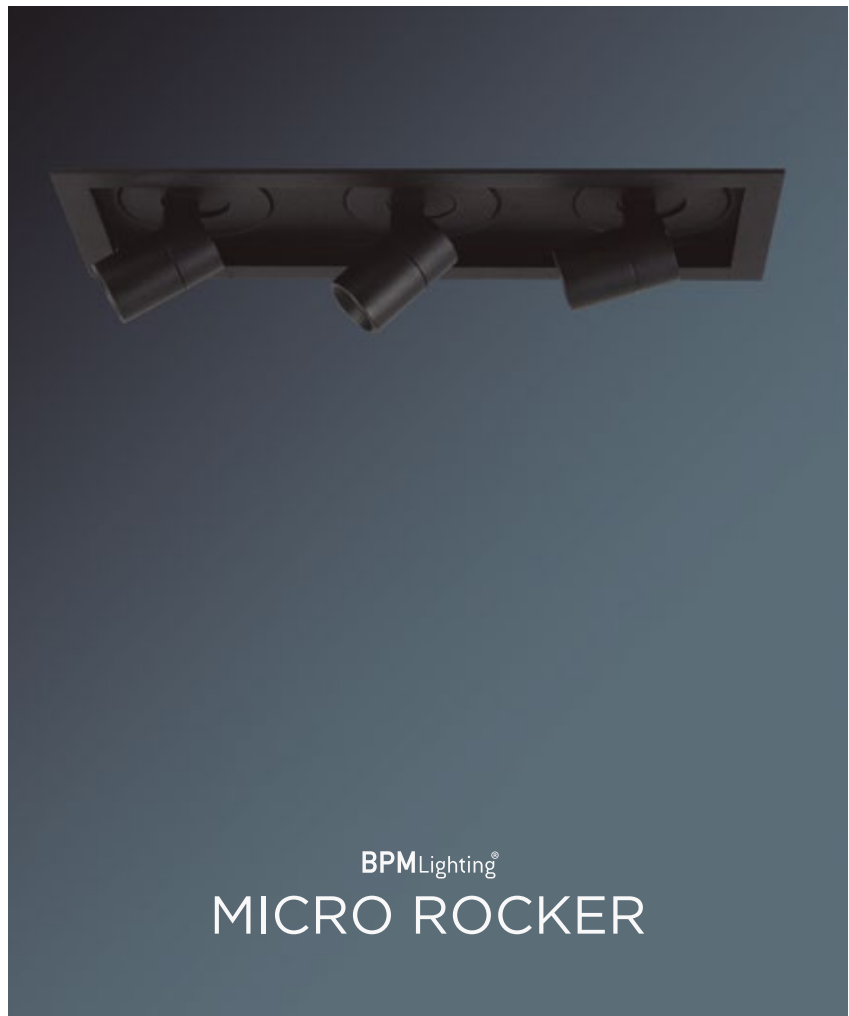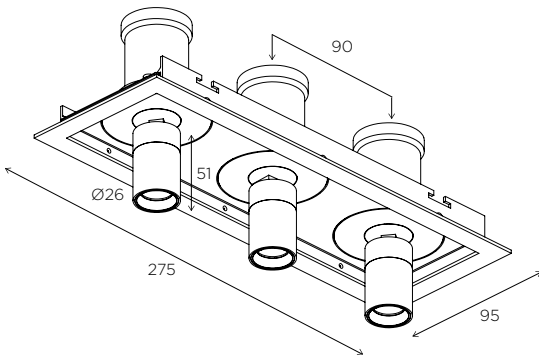


PHOTOMETRY - FOTOMETRÍA

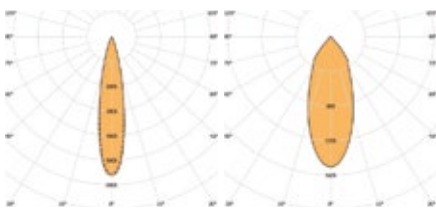

.D20

.D40



.D60



You can find all photometry data in our web.

Puedes encontrar todas las fotometrías en nuestra web.

BPMLighting®
MICRO ROCKER