



ALARIK FAMILY





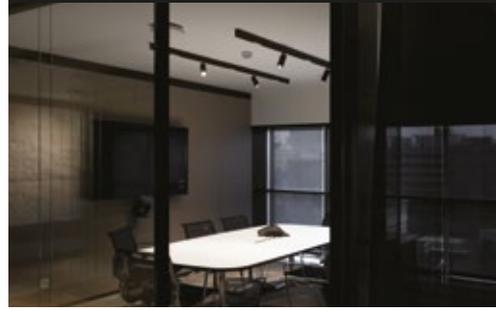


“It’s playtime! Lighting design with Alarik is an exercise in creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.”

“¡Que empiece el juego!. Iluminar con Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.”



Let's get brighter

ALARIK




REF 10225.PN | .SR

IP20

COLOURS

Select finishes in profile and components



REF 10225.TR

IP20
IP23






ALARIK

REF 10225 .PN | .SR | .TR

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200


PROFILES



Total length = Profile length + 10mm + 2x2mm (Cover kit)
 (Total length + 2mm) x 85mm
 115mm

PATRICIA S


REF 20146



20146	.01	LUMEN	.01	DIMM
OPTIC	.15 .24 .38	.27	421	.DA
WATT	8	.30	440	
VdC	48	.40	495	

PATRICIA M


REF 20193



20193	.01	LUMEN	.01
OPTIC	.15 .24 .38	.27	544
WATT	13	.30	626
VdC	48	.40	706

LED MODULES


REF 11542



11542	.01	.02	.03	LUMEN	.01	.02	.03
OPTIC	OPAL			.27	306	612	955
WATT	6	12	18	.30	329	657	1031
VdC	48			.40	352	704	1081

LENSES


REF 11534.05



11534.05	.01	LUMEN	.01
OPTIC	.20 .40 .60	.27	660
WATT	10	.30	750
VdC	48	.40	827

LENSES

REF 11534.05F



11534.05F	.01	LUMEN	.01
OPTIC	.20 .40 .60	.27	660
WATT	10	.30	750
VdC	48	.40	827

JOINTS & CONNECTORS | .PN .SR .TR

LINEAR JOINT UR18



ANGLE JOINT UL18



CROSS JOINT UC18




T-JOINT UT18



Attention: Each angle joint requires an additional driver to that of the luminaire.
 Atención: Cada esquina requiere de un driver adicional al de la luminaria.

COMPONENTS

COVER KIT

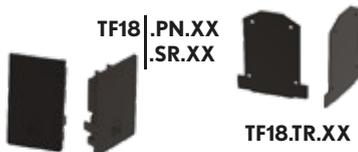

ONLY FOR .SR




SUSPENSION KIT




BOXES (.PN)

NOT-INCLUDED PLEASE SELECT ONE



CB09.12
connection box for
REMOTE DRIVER



CB06.40
DRIVER BOX

CB08.38 DRIVER BOX



380

Ø66

ALARIK

MINI | MINI ROUND




REF 210006.PN | .SR
REF 210004.PN | .SR

IP20

COLOURS

Select finishes in profile and components




REF 210006.TR


IP20
IP23



ALARIK MINI REF 210006.PN | .SR



REF 210006.TR

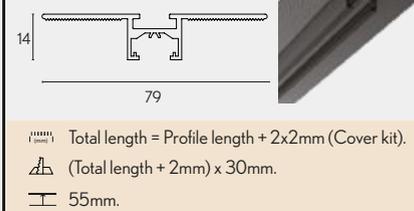


ALARIK MINI ROUND REF 210004.PN | .SR



TRANSFORMER


48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

MINI PATRICIA REF 450001

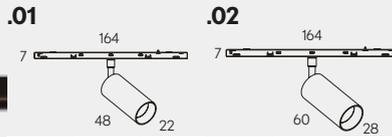


450001	.01	.02	LUMEN	.01	.02
OPTIC	.15 .24 .30		.27	130	396
WATT	3	6	.30	145	421
VdC	48		.40	185	476

MINI PATRICIA LOL REF 450002




450002	.01	LUMEN	.01
OPTIC	.15 .24 .36	.27	397
WATT	6	.30	425
VdC	48	.40	460

MINI PATRICIA ZOOM REF 450003




450003	.01	LUMEN	.01
OPTIC	.15-.40	.27	169
WATT	6	.30	172
VdC	48	.40	212

MINI PATRICIA FLAT REF 450007



450007	.01	LUMEN	.01
OPTIC	.15 .30 .36	.27	425
WATT	5	.30	465
VdC	48	.40	481

MINI MOTION LENSES REF 450004




450004	.01	LUMEN	.01
OPTIC	.23 .28 .36	.27	547
WATT	6	.30	570
VdC	48	.40	634

MINI LED MODULES REF 450006



450006	.01	.02	.03	LUMEN	.01	.02	.03
OPTIC	OPAL			.27	473	997	2037
WATT	6	12	24	.30	478	1003	2045
VdC	48			.40	486	1011	2060

MINI PATRICIA ROUND LENSES REF 450008




450008	.01	LUMEN	.01
OPTIC	.30 .36 .60	.27	550
WATT	9	.30	563
VdC	48	.40	648

MINI LENSES REF 450005



450005	.01	LUMEN	.01
OPTIC	.23 .28 .36	.27	538
WATT	9	.30	590
VdC	48	.40	682


JOINTS & CONNECTORS

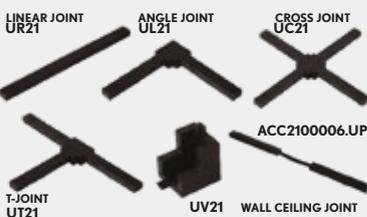


COMPONENTS




BOXES (.PN)



ALARIK MINI POWER FEEDER REF ACC210006.CA



ALARIK MINI ROUND POWER FEEDER REF ACC210004.CA



ALARIK

SLIM | SLIMROUND




REF 20224.PN|.SR
REF 210019.PN|.SR

IP20

COLOURS

Select finishes in profile and components




REF 20224.TR|.RF

IP20
IP23




ALARIK SLIM REF 20224.PN|.SR|.TR|.RF

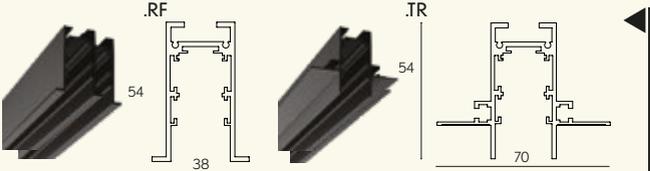


Total length = Profile length + 2x8mm (Cover kit)
 (Total length - 8mm) x 30mm
 90mm
 Total length = Profile length + 2x3mm (Cover kit)
 (Total length + 2mm) x 55mm
 85mm

ALARIK SLIMROUND REF 210019.PN|.SR

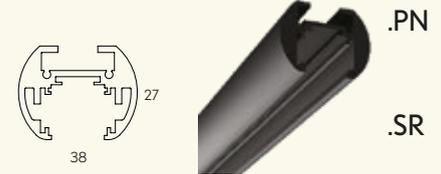


SLIM PATRICIA REF 11544

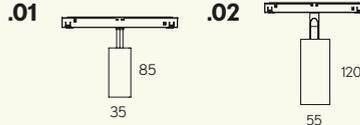

	.01	.02	LUMEN	.01	.02
OPTIC	.15 .38 .60	.27	525	1070	
WATT	8	15	.30	565	1147
VdC	48	.40	660	1267	

SLIM LENSES REF 11548




	.01	.02	LUMEN	.01	.02
OPTIC	.15 .38	.27	725	1320	
WATT	8	15	.30	750	1511
VdC	48	.40	827	1654	

SLIM PATRICIA ZOOM REF 11546



	.01	LUMEN	.01
OPTIC	.15-36 .36-60	.27	1888
WATT	25	.30	1995
VdC	48	.40	2191

SLIM MOTION LENSES REF 11547




	.01	LUMEN	.01
OPTIC	.15 .38	.27	660
WATT	8	.30	750
VdC	48	.40	827

SLIM LED BALL REF 11551



	.01	LUMEN	.01
OPTIC	.37	.27	355
WATT	8	.30	383
VdC	48	.40	396

SLIM LED MODULES REF 11549



	.01	.02	.03	LUMEN	.01	.02	.03
OPTIC	OPAL			.27	558	1115	1670
WATT	9	18	24	.30	560	1120	1680
VdC	48			.40	604	1208	1812

SLIM LED TUBE 20 REF 11553



	.01	LUMEN	.01
OPTIC	.20 .40	.27	174
WATT	3	.30	187
VdC	48	.40	212

SLIM LED TUBE 40 REF 11552




	.01	LUMEN	.01
OPTIC	.20 .40	.27	954
WATT	14	.30	991
VdC	48	.40	1067



**LED Modules are Class III. Los módulos LED son Clase III.

***LED components can not be installed in curve joints.
Los componentes LED no se pueden instalar en las uniones curvas.

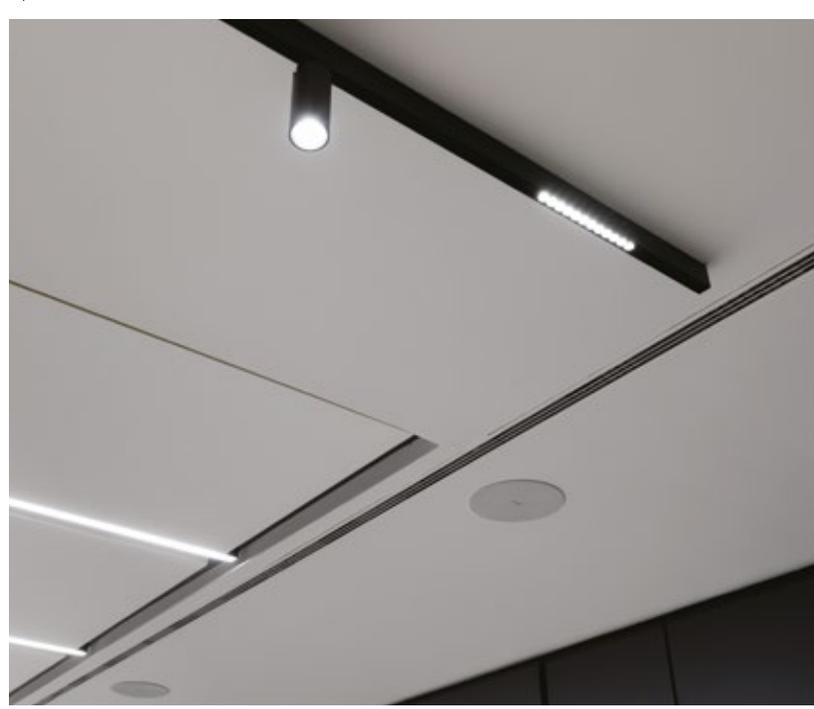

Mastering Light has never been so easy

That's the look of lighting with the Alarik family.
Incredibly dynamic, with a wide choice
of finishes, sizes and profiles.

ALARIK
ALARIK SLIM | SLIM ROUND
ALARIK MINI | MINI ROUND

A collection of almost gadget-like models
with an important mission, to get the
absolute best from a lighting system.

Jugar con luz nunca ha sido tan fácil

Así es la atracción que provoca iluminar con la familia Alarik.
Extremadamente dinámica gracias a sus
diferentes acabados, tamaños y perfiles.

ALARIK
ALARIK SLIM | SLIM ROUND
ALARIK MINI | MINI ROUND

Un conjunto de modelos que casi parecen gadgets
al servicio de una "importante misión": sacar todo
el jugo posible a una instalación de luminarias.



Let's get brighter

JOINTS & CONNECTORS

FLEXIBLE JOINT
ACC20224.UR



LINEAR JOINT
ACC20224.UL



POWER FEEDER
ACC20224.CA



ALK. SLIM ACC20224.UR.XX
ALK. SLIM ROUND ACC210019.UR.XX

ACC20224.UL.XX
ACC210019.UL.XX

ACC20224.CA.XX
ACC210019.CA.XX

INTEGRATED * POWER




10246.DR
(404x43x22mm)
200W

TRANSFORMER

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200


JOINTS FOR .PN .SR .RF

UR19
LINEAR JOINT




22 160

UV19
WALL-CEILING JOINT



175 22


UL19
ANGLE JOINT



175 175


JOINTS FOR .TR

UR19
LINEAR JOINT



22 160

UW19
WALL-CEILING JOINT



UC19
ANGLE JOINT



COMPONENTS


SLIM COVER KIT

TF19.PN | .SR
TF19.RF (2X8mm)
TF19.TR (2X3mm)

SLIM ROUND COVER KIT

TF20.PN | .SR

ONLY FOR .PN | .SR



SUSPENSION KIT

ACC20224.SC

ACC210019.SC

SUSPENSION KIT WITH DRIVER BOX

ACC20224.PKDB

ACC210019.PKDB

CURVE JOINT KIT***




45°

27

ACC20224.XX.45.XX

.01 Ø350 .WH-WH
.02 Ø450 .BK-BK
.03 Ø650



90°

27

ACC20224.XX.90.XX

.01 Ø350 .WH-WH
.02 Ø450 .BK-BK
.03 Ø650

* INTEGRATED POWER ONLY FOR ALARIK SLIM



WE MINIATURIZE LIGHT,
WE MAXIMIZE IMPACT.

MINIATURIZAMOS LA LUZ,
MAXIMIZAMOS EL IMPACTO.



FOLLOW US!

@bpmlighting

#letsgetbrighter

#lightingmadeinspain

bpmlighting.com

Partida Madrigueres Sud, 11,
03749 Dénia, Alicante