


WORKBOOK 2026

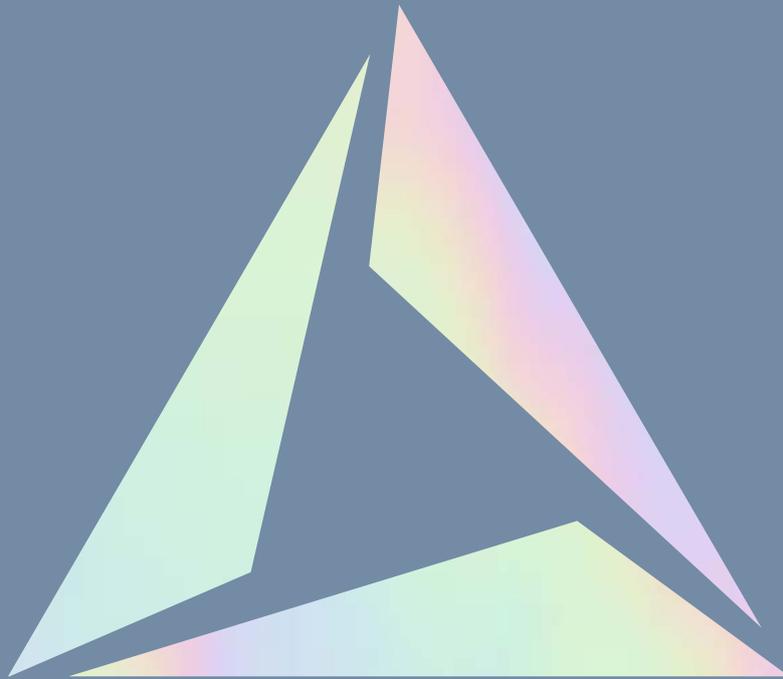

BPM LIGHTING

© BPM Iluminación, S.L., 2026

ALL RIGHTS RESERVED.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means — electronic, mechanical, photocopying, recording or otherwise — without the prior written permission of BPM Iluminación, S.L.

BPM Lighting reserves the right to modify technical specifications, finishes and product features without prior notice.

TODOS LOS DERECHOS RESERVADOS.

Ninguna parte de esta publicación puede ser reproducida, almacenada o transmitida en cualquier forma o por cualquier medio, ya sea electrónico, mecánico, fotocopia, grabación o cualquier otro, sin el consentimiento previo y por escrito de BPM Iluminación, S.L.

BPM Lighting se reserva el derecho de modificar especificaciones técnicas, acabados y características de los productos sin previo aviso.

Design and Creative Direction: BPM Lighting

Published by: BPM Iluminación, S.L.

Diseño y dirección creativa: BPM Lighting

Edición: BPM Iluminación, S.L.

Printed by: DPrint

Printed in Spain · Made in Spain

Impresión: DPrint

Impreso en España · Made in Spain



Avda. de Valencia 52

03770 El Verger

Alicante, Spain

Tel. +34 965 781 218

info@bpmlighting.com

www.bpmlighting.com

GENERAL INDEX

DECORATIVE



WALL LIGHTS



LUMINAIRES



ACOUSTIC



OUTDOOR



CRISMOSIL



LINEAR SYSTEMS



SPOTLIGHTS



- 42 | LUMINAIRES
- 160 | LINEAR SYSTEMS
- 260 | SPOTLIGHTS
- 372 | DECORATIVE
- 402 | WALL LIGHTS
- 420 | ACOUSTIC
- 456 | OUTDOOR
- 466 | CRISMOSIL
- 558 | TECHNICAL INFO

ALBERTA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW ALBERTA SOFT CONNECT REF. 141 PAG. 48					
NEW ALBERTA SLIGHT CONNECT REF. 126 PAG. 52					
NEW ALBERTA SOFT STONE REF. 144 PAG. 56					
NEW ALBERTA SOFT LOOP REF. 142 PAG. 60					
NEW ALBERTA INSIDE HAT REF. 123 PAG. 64					
NEW ALBERTA SLIGHT ECCENTRIC REF. 127 PAG. 68					
NEW ALBERTA SOFT OUTSIDE REF. 143 PAG. 72					
NEW ALBERTA OUTSIDE REF. 124 PAG. 76					
NEW ALBERTA INSIDE REF. 122 PAG. 80					
NEW ALBERTA DUE REF. 121 PAG. 84					
NEW ALBERTA SOFT REF. 140 PAG. 88					
NEW ALBERTA SLIGHT REF. 125 PAG. 92					
NEW ALBERTA REF. 120 PAG. 96					

FLORIDA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FLORIDA DECO REF. 161 PAG. 102					
NEW FLORIDA REF. 160 PAG. 106					
NEW FLORIDA SQ REF. 162 PAG. 110					

ALABAMA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW ALABAMA STONE REF. 105 PAG. 116					
NEW ALABAMA LOOP REF. 101 PAG. 120					
NEW ALABAMA REF. 100 PAG. 124					
NEW ALABAMA SLIGHT REF. 102 PAG. 128					
NEW ALABAMA SLIGHT SQ REF. 103 PAG. 132					
NEW ALABAMA SLIM REF. 104 PAG. 136					
NEW ALABAMA SUPER SLIM REF. 106 PAG. 140					

OHIO FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW OHIO REF. 170 PAG. 146					
NEW OHIO SQ REF. 171 PAG. 150					

ALARIK SLIM LUMINAIRE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY ALARIK SLIM LUMINAIRE REF. 175 PAG. 156					
--	--	--	--	--	--

ALARIK FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALARIK SLIM
REF. 230
PAG. 166



ALARIK MINI
REF. 200
PAG. 172



ALARIK NANO
REF. 215
PAG. 178



TRACKLIGHT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

TRACKLIGHT
REF. 292
PAG. 186



ALBA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALBA MINI
REF. 251
PAG. 196



ALBA MINI AIO
REF. 253
PAG. 200



ALBA MINI MODULIGHT
REF. 280
PAG. 204




ALBA WING
REF. 290
PAG. 210



ALBA PRO
REF. 255
PAG. 214



ALBA PLUS
REF. 254
PAG. 220



ALBA DOUBLE
REF. 250
PAG. 224



ALBA LINGGO MINI
REF. 276
PAG. 228



ALBA LINGGO
REF. 275
PAG. 232



FLY FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE


FLY
REF. 270
PAG. 238



VAULT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

VAULT
REF. 265
PAG. 244



OKKIA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

OKKIA
REF. 287
PAG. 250



ALZIRA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALZIRA
REF. 267
PAG. 256



MARTORELL FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

MARTORELL FLIP
REF. 337
PAG. 266



MARTORELL MOVE
REF. 339
PAG. 268



MARTORELL
REF. 335
PAG. 270



MARTORELL TUBE MOVE
REF. 345
PAG. 272



MARTORELL CRATE
REF. 336
PAG. 274



MARTORELL MINI CRATE
REF. 338
PAG. 276



MARTORELL SQ
REF. 340
PAG. 278



MARTORELL SQ DOUBLE
REF. 341
PAG. 278



MARTORELL TÁRREGA
REF. 342
PAG. 280



MARTORELL TUBULAR 20
REF. 346
PAG. 282



MARTORELL TUBULAR 40
REF. 347
PAG. 282



MARTORELL TUBULAR 60
REF. 348
PAG. 282



MARTORELL TUBULAR TILT
REF. 349
PAG. 282



PATRICIA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

PATRICIA
REF. 355
PAG. 286



KLIMT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KLIMT
REF. 320
PAG. 292



KLIMT FIX
REF. 320
PAG. 294



CUBE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

CUBE
REF. 309
PAG. 298



CUBE DOUBLE
REF. 310
PAG. 298



CUBE TRIPLE
REF. 311
PAG. 298



CUBE TUBE
REF. 312
PAG. 300



CUBE TUBE
REF. 313
PAG. 300



CUBE TUBE MOVE
REF. 314
PAG. 302



CUBE TUBE MOVE
REF. 315
PAG. 302



LUK FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

LUK CRUSADER
REF. 330
PAG. 306



LUK HAWKEYE
REF. 331
PAG. 308



LUK HAWKEYE DOUBLE
REF. 332
PAG. 308



ORACLE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ORACLE
REF. 354
PAG. 312



SPOTLIGHTS

LENT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

LENT MODULAR
REF. 325
PAG. 316



NEW



NEW



NEW

LENT MOTION
REF. 326
PAG. 318



ASTRA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY
ASTRA
REF. 302
PAG. 322



VIO FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW
VIO ASYMETRIC
REF. 371
PAG. 326



NEW
VIO COMPACT
REF. 372
PAG. 326



VIO
REF. 370
PAG. 326



VIO DOME
REF. 375
PAG. 326



VIO SQ
REF. 379
PAG. 326



VIO DEEP
REF. 373
PAG. 326



VIO DEEP MOVE
REF. 374
PAG. 326



VIO DOME MOVE
REF. 376
PAG. 326



VIO MOVE
REF. 378
PAG. 326



VIO SQ MOVE
REF. 380
PAG. 326



SPOTLIGHTS

SASSY FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

SASSY
REF. 360
PAG. 332



SASSY SQ
REF. 361
PAG. 334



SASSY ROUND HOLE
REF. 362
PAG. 332



SASSY OVAL HOLE
REF. 363
PAG. 332



SASSY SNOOT
REF. 364
PAG. 332



ROY FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ROY
REF. 359
PAG. 338



CAN REVIEW FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

CAN REVIEW
REF. 308
PAG. 342



CAN REVIEW IP65
REF. 365
PAG. 344



ALDAIA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALDAIA
REF. 300
PAG. 348



ALDAIA SQ
REF. 301
PAG. 348



VADI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

VADI
REF. 366
PAG. 352



SPOTLIGHTS

KONI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KONI
REF. 388
PAG. 356



KONI DEEP
REF. 389
PAG. 358



KONI TURTA
REF. 390
PAG. 359



CATLI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

CATLI
REF. 381
PAG. 362



CATLI SQ
REF. 385
PAG. 364



CATLI SQ DOUBLE
REF. 386
PAG. 366



CATLI CLASSIC
REF. 382
PAG. 368



CATLI CLASSIC SQ
REF. 383
PAG. 369



CATLI HALKA
REF. 384
PAG. 370



DECORATIVE

GALANTA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

GALANTA DEEP
REF. 506
PAG. 378



GALANTA BONETE
REF. 505
PAG. 380



SUBLIM FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

SUBLIM
REF. 507
PAG. 384



VENISE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

VENISE
REF. 508
PAG. 388



FACE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

FACE TUBULAR
REF. 503
PAG. 392



FACE TUBULAR SPAC
REF. 504
PAG. 394



FACE IRIS
REF. 500
PAG. 396



FACE KIERA
REF. 501
PAG. 398



FACE KIERA CEMENT
REF. 502
PAG. 400



WALL LIGHTS

FLAT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

FLAT
REF. 520
PAG. 406



FLAT SLIM
REF. 521
PAG. 406



HURY FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

HURY
REF. 522
PAG. 408



IKI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

IKI
REF. 523
PAG. 410



KAPI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KAPI
REF. 524
PAG. 412



KUU FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KUU
REF. 525
PAG. 414



MAGRIT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

MAGRIT
REF. 535
PAG. 418



ADIMA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ADIMA
REF. 536
PAG. 418



ADIMA SQ
REF. 537
PAG. 418



KLEE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KLEE
REF. 538
PAG. 419



KLEE SQ
REF. 539
PAG. 419



ACOUSTIC

ACOUSTIC FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ACOUSTIC ALBERTA SOFT
REF. 556
PAG. 428



ACOUSTIC ALABAMA
REF. 557
PAG. 430



ACOUSTIC ALABAMA SQ
REF. 558
PAG. 430



ACOUSTIC ALARIK SLIM
REF. 555
PAG. 432



ACOUSTIC ALBA MINI
REF. 554
PAG. 436



ACOUSTIC ALBA
REF. 551
PAG. 438



ACOUSTIC LAMBDA
REF. 553
PAG. 442



ACOUSTIC LINGGO MINI
REF. 552
PAG. 444



ACOUSTIC ALZIRA
REF. 550
PAG. 448



ACOUSTIC KLIMT FIX
REF. 559
PAG. 450



ACOUSTIC KLIMT FIX SQ
REF. 560
PAG. 450



ACOUSTIC ACCESORIES
PAG. 454



OUTDOOR

WALL FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

WALL ARA OUT
REF. 685
PAG. 460



WALL ZAHARA OUT
REF. 686
PAG. 462



WALL DRACO OUT
REF. 687
PAG. 464



NUVOL FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

NUVOL
REF. 635
PAG. 472



WAVE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

WAVE
REF. 665
PAG. 476



WAVE SOFT
REF. 664
PAG. 478



WAVE DOME
REF. 663
PAG. 479



SAND FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

SAND
REF. 645
PAG. 482



MENORCA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

MENORCA DEEP STRAIGHT
REF. 625
PAG. 488



MENORCA DEEP TILT
REF. 626
PAG. 489



MENORCA DEEP WAVE
REF. 627
PAG. 490



MENORCA EDGE
REF. 628
PAG. 491



MENORCA FLAT
REF. 629
PAG. 492



MENORCA WHASER
REF. 630
PAG. 493



ALBA PRO CRISMOSIL FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

ALBA PRO CRISMOSIL
REF. 615
PAG. 494



ZENIT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

ZENIT
REF. 670
PAG. 502



ZENIT RING
REF. 600
PAG. 503



ZENIT DEEP
REF. 671
PAG. 504



ZENIT DEEP 00
REF. 672
PAG. 504



ZENIT DEEP TWINS
REF. 673
PAG. 506



ZENIT MOVE
REF. 674
PAG. 507



ZENIT MOVE SQ
REF. 675
PAG. 508



ZENIT ORTO
REF. 676
PAG. 509



ZENIT SIDEREA
REF. 677
PAG. 510



ZENIT SIDEREA ASYMETRIC
REF. 650
PAG. 512



ZENIT SQ
REF. 678
PAG. 514



ZENIT STONE
REF. 679
PAG. 515



ZENIT ZUBIA
REF. 680
PAG. 516



ZENIT ZUBIA SQ
REF. 681
PAG. 517



VEGA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

VEGA
REF. 654
PAG. 520



VEGA ADHARA
REF. 655
PAG. 522



VEGA TWINS
REF. 656
PAG. 524



VEGA ZETA
REF. 657
PAG. 526



ESPIGA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

ESPIGA SOFT
REF. 660
PAG. 530



ESPIGA
REF. 610
PAG. 532



ESPIGA SQ
REF. 614
PAG. 534



ESPIGA SIRIO
REF. 612
PAG. 536



ORBIT FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

ORBIT
REF. 641
PAG. 540



ORBIT ARA
REF. 642
PAG. 541



ORBIT NADIR
REF. 640
PAG. 542



DRACO FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

DRACO
REF. 605
PAG. 546



DRACO ORION
REF. 606
PAG. 547



DRACO WALL ORION
REF. 662
PAG. 548



DRACO TUCANA
REF. 607
PAG. 550



DRACO ZAHARA
REF. 608
PAG. 551



TYRA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL RECESSED

TYRA
REF. 624
PAG. 554



TYRA LYRA
REF. 652
PAG. 556



LIGHT THAT INSPIRES, DESIGN THAT TRANSFORMS

LUZ QUE INSPIRA,
DISEÑO QUE TRANSFORMA

With over 50 years of experience from Denia (Costa Blanca), BPM Lighting creates architectural lighting solutions that blend cutting-edge technology, artisan processes, and a strong design focus.

Our flexible structure and innovative spirit allow us to offer custom-made luminaires tailored to each project's needs. We believe in light that brings well-being, identity, and sustainability.

Let's get brighter.

Con más de 50 años de experiencia desde Denia (Costa Blanca), en BPM Lighting creamos soluciones de iluminación arquitectural que combinan tecnología de vanguardia, procesos artesanales y una clara vocación por el diseño.

Nuestra estructura flexible y espíritu innovador nos permiten ofrecer luminarias personalizadas, adaptadas a las necesidades de cada proyecto. Apostamos por una luz que genera bienestar, identidad y sostenibilidad.

Let's get brighter.





A NEW HEADQUARTERS THAT REFLECTS WHO WE ARE

UNA NUEVA SEDE QUE REFLEJA NUESTRA ESENCIA

BPM Lighting's new headquarters in El Verger (Alicante) is much more than just a production facility: it's a living space that embodies our core values: innovation, design, proximity, and sustainability.

The new site includes a more efficient and sustainable production area, a curated showroom showcasing our collections and bespoke projects, and collaborative spaces designed to inspire dialogue with architects, designers, and lighting professionals.

This new chapter is also an experience. Our HQ is a place to host events, training sessions, and creative meetings, encouraging the exchange of ideas around light as a transformative force.

From El Verger, we continue lighting the future with creativity, precision, and a true passion for what we do.


La nueva sede de BPM Lighting en El Verger (Alicante) nace como un espacio vivo donde se materializan nuestros valores: innovación, diseño, proximidad y sostenibilidad.

Más allá de un centro productivo, es un entorno que inspira. Con una nueva área de fabricación más eficiente y sostenible, un showroom que presenta nuestras colecciones y proyectos a medida, y espacios concebidos para la co-creación con arquitectos, diseñadores y profesionales de la iluminación.



Queremos que esta nueva etapa sea también una experiencia. Por eso, nuestra sede está pensada para acoger eventos, formaciones y encuentros que fomenten el diálogo y el intercambio de ideas en torno a la luz como elemento transformador.

Desde El Verger, seguimos iluminando el futuro con creatividad, precisión y una profunda pasión por lo que hacemos.

LET'S GET
BRIGHTER

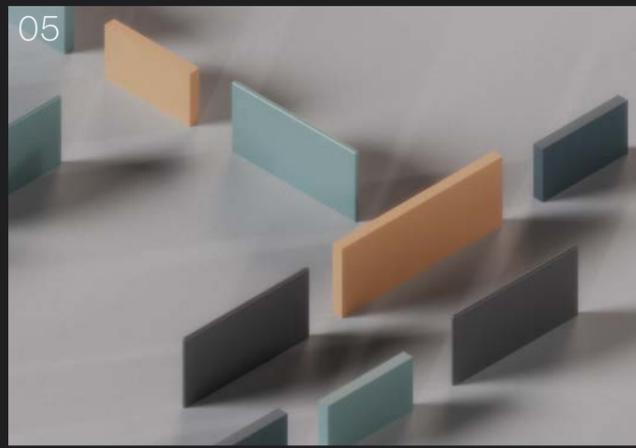

01 | ALARIK SLIM LUMINAIRE 02 | ALABAMA LOOP
03 | ALARIK NANO DOUBLE 04 | ALABAMA SLIGHT 05 | FLAT
06 | ALBERTA SOFT OUTSIDE 07 | FLORIDA DECO 08 | FLY
09 | NUVOL 10 | SAND 11 | ALBERTA INSIDE HAT

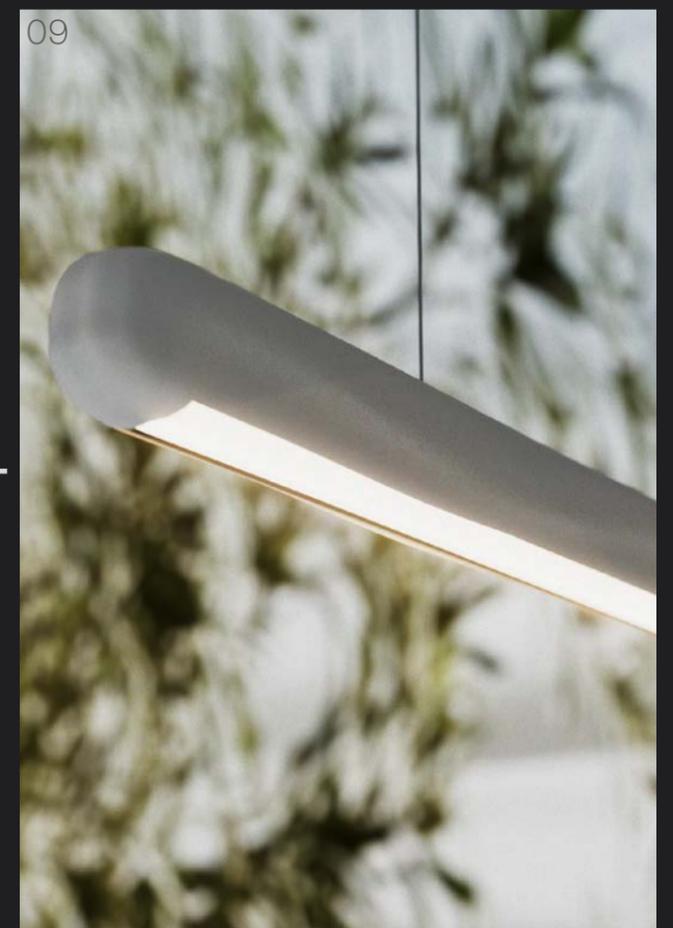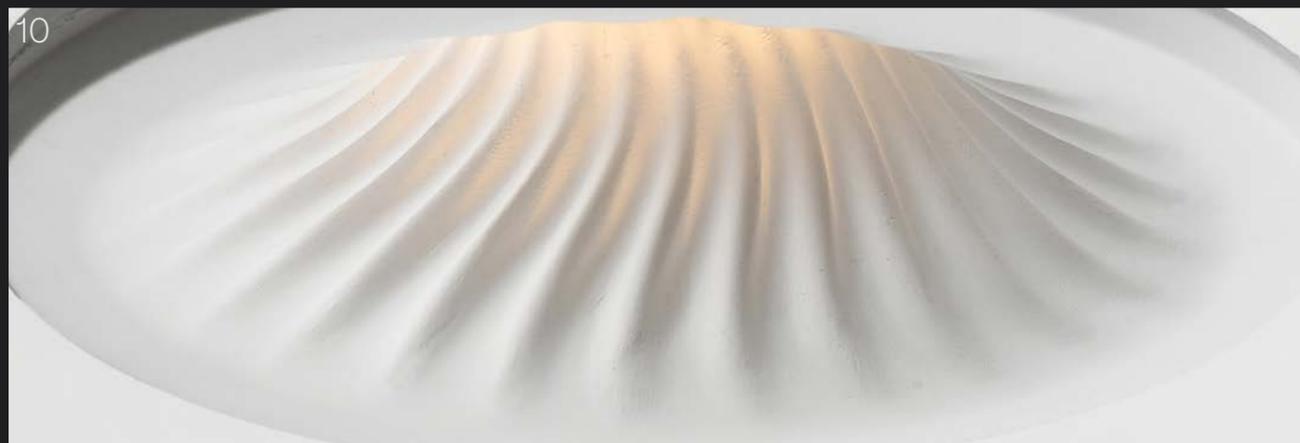

COMMITTED TO LIGHTING THAT RESPECTS THE PLANET

COMPROMETIDOS CON UNA
LUZ QUE RESPETA EL PLANETA

At BPM Lighting, we believe that innovation and sustainability must go hand in hand. Our commitment to the environment and the community is reflected in a people-centered, proximity-based and environmentally responsible management model.

We work daily to reduce the environmental impact of our activities through concrete and measurable actions.

En BPM Lighting creemos que la innovación y la sostenibilidad deben ir de la mano. Nuestro compromiso con el entorno y la comunidad se refleja en un modelo de gestión centrado en las personas, la proximidad y la responsabilidad ambiental.

Trabajamos cada día para reducir el impacto de nuestras actividades, con acciones concretas y medibles.



10%

ANNUAL REDUCTION OF OUR CARBON FOOTPRINT

reducción anual de nuestra huella de carbono

100%

PLASTIC-FREE PACKAGING FOR ALL OUR REFERENCES

Eliminación total de plásticos en el embalaje



NEW HEADQUARTERS SOLAR ENERGY

PHOTOVOLTAIC SOLAR PANELS INSTALLED AT OUR NEW HEADQUARTERS

Paneles solares fotovoltaicos instalados en nuestra nueva sede

FSC

EXCLUSIVE USE FSC-CERTIFIED CARDBOARD IN ALL PACKAGING

Uso exclusivo de cartón certificado FSC en todos nuestros envases



ECO

PROFILES MADE FROM 100% RECYCLED MATERIALS

Introducción de perfiles ECO con materiales 100% reciclados



SUSTAINABLE EFFICIENT

AND LOW-IMPACT PRODUCTION PROCESSES

Proceso productivo responsable, eficiente y orientado al bajo impacto ambiental



100%

MADE IN SPAIN AND IN COLLABORATION WITH NEARBY SUPPLIERS

Fabricación 100% en España con proveedores de proximidad

CRADLE TO CRADLE®

CERTIFIED LED BOARDS, ENSURING RECYCLABILITY AND CIRCULARITY

Incorporación de placas LED con certificación Cradle to Cradle®



We understand that lighting is more than just a technical element: it's about well-being, identity, and emotion. That's why we design high-performance, sustainable, and long-lasting solutions that enhance everyday life and respect the planet we share.

Sabemos que la luz es más que un elemento técnico: es bienestar, identidad y emoción. Por eso desarrollamos soluciones de alto rendimiento, sostenibles y duraderas, que acompañan el día a día de las personas y cuidan del entorno que compartimos.

<  IF YOU CAN
DREAM IT,
WE CAN
MAKE IT!

DAMOS FORMA A TU LUZ.
CREAMOS PROYECTOS ÚNICOS

At BPM Lighting, we believe every space deserves a unique lighting solution. That's why we offer a fully customized design and manufacturing service, turning your ideas into real, tangible luminaires.

From the initial concept to the final installation, our design, engineering and production teams work closely with you to develop exclusive solutions tailored to the needs of each project — including architecture, materials, finishes, optics, and functionality.


En BPM Lighting creemos que cada espacio merece una solución luminosa única. Por eso, ofrecemos un servicio personalizado de diseño y fabricación a medida, capaz de transformar ideas en luminarias reales.

Desde el concepto inicial hasta la instalación final, nuestro equipo de diseño, ingeniería y producción trabaja contigo para desarrollar soluciones exclusivas que se adaptan a las exigencias de cada proyecto: diseño arquitectónico, materiales, acabados, ópticas, y funcionalidad.





WE SHAPE
YOUR LIGHT.
WE CREATE
UNIQUE
PROJECTS

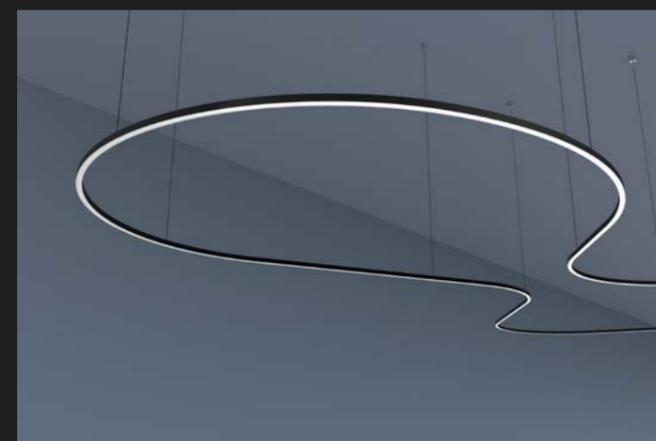

We combine innovation, craftsmanship and technology to create lighting pieces that illuminate with purpose and enhance the user experience. Each custom project reflects our passion for light and our commitment to supporting architects, designers and interior professionals.

We create lighting fixtures that don't exist yet. And we bring them to life with you.

Integramos innovación, artesanía y tecnología para crear piezas que iluminan con intención y elevan la experiencia del espacio. Cada proyecto refleja nuestra pasión por la luz y nuestra capacidad de adaptación a las necesidades de arquitectos, diseñadores e interioristas.

Creamos luminarias que no existen todavía. Y lo hacemos realidad, contigo.

CUSTOMIZATION WITHOUT LIMITS

PERSONALIZACIÓN SIN LÍMITES

At BPM Lighting, we understand that every project is unique. That's why we offer a wide range of custom options in finishes, colors, and formats tailored to the aesthetic and functional needs of each space.

We can create exclusive solutions based on RAL charts, anodized finishes, textures, or special materials, without affecting lead times or compromising product quality.

Because light speaks the language of design. And at BPM, you choose how it speaks.

En BPM Lighting entendemos que cada proyecto es único. Por eso ofrecemos un amplio abanico de opciones personalizadas en acabados, colores y formatos, adaptándonos a la estética y funcionalidad de cada espacio.

Podemos desarrollar soluciones exclusivas en base a cartas RAL, anodizados, texturas y materiales especiales, sin comprometer los plazos de entrega ni la calidad del producto.

Porque la luz también habla el lenguaje del diseño. Y en BPM, ese lenguaje lo eliges tú.



YOUR PROJECT, YOUR PALETTE. NO LIMITS



TU PROYECTO,
TUS ACABADOS.
SIN LÍMITES

01 | METALLIC 02 | SATIN 03 | GLOSSY
04 | MATTE 05 | BRUSHED 06 | GRADIENT



Color makes a difference.
We create bespoke finishes to adapt each luminaire to the project, from metallic and satin to glossy or matte.

*El color marca la diferencia.
Creamos acabados a medida para adaptar cada luminaria al proyecto, desde metálicos y satinados hasta brillantes o mate.*

Metallic finishes will always be developed based on the sample provided by the client.
Los acabados metálicos se desarrollarán siempre a partir de la muestra entregada por el cliente

CRISMOSIL®: CRAFTSMANSHIP, DESIGN & LOCAL PRODUCTION

CRISMOSIL®: ARTESANÍA,
DISEÑO Y PRODUCCIÓN LOCAL

At BPM Lighting, we develop and manufacture bespoke luminaires in Spain, combining advanced technology with artisanal processes.

Crismosil® is our exclusive material, reinforced with fiberglass and acrylic resins, handcrafted to ensure durability, precision and seamless architectural integration.

Its flexibility allows full customisation in shapes, colours and finishes, adapting each piece to the creative and technical requirements of architects and designers.

En BPM Lighting desarrollamos y fabricamos luminarias a medida en España, combinando tecnología avanzada con procesos artesanales.

Crismosil® es nuestro material exclusivo, reforzado con fibra de vidrio y resinas acrílicas, elaborado a mano para garantizar durabilidad, precisión e integración arquitectónica.

Su flexibilidad permite una personalización total en formas, colores y acabados, adaptando cada pieza a las necesidades creativas y técnicas de arquitectos y diseñadores.



Una solución lumínica para cualquier espacio

Concebidas como una familia de iluminación arquitectónica, estas luminarias están diseñadas para integrarse con precisión en el entorno construido. Su geometría cuidada y la emisión uniforme de la luz permiten crear espacios confortables y equilibrados, donde la iluminación acompaña la arquitectura de forma natural y controlada.

Con el confort visual como prioridad, la simplicidad del sistema esconde un alto nivel de prestaciones, haciendo posible la creación de ambientes únicos con una iluminación homogénea y un control preciso de la intensidad lumínica.

A lighting solution for any space

Designed as an architectural lighting family, these luminaires are conceived for precise integration into the built environment. Their refined geometry and uniform light emission create comfortable and balanced spaces, allowing light to follow the architecture in a natural and controlled way.

Focused on visual comfort rather than distraction, the simplicity of the system conceals a high level of performance, enabling the creation of unique environments with controlled intensity and homogeneous illumination.

LUMINAIRES

<

ALBERTA

PAG. 46

FLORIDA

PAG. 100

ALABAMA

PAG. 114

OHIO

PAG. 144

ALARIK SLIM LUMINAIRE

PAG. 154

LUMINAIRES



ALBERTA FAMILY



**ALBERTA SOFT | SOFT CONNECT | SOFT STONE
SOFT LOOP | SOFT OUTSIDE**
REF. 140 | 141 | 144 | 142 | 143
PAG. 88 | 48 | 56 | 60 | 72



ALBERTA SLIGHT | SLIGHT CONNECT
REF. 125 | 126
PAG. 92 | 52



ALBERTA INSIDE | INSIDE HAT
REF. 122 | 123
PAG. 80 | 64



ALBERTA SLIGHT ECCENTRIC
REF. 127
PAG. 68



ALBERTA OUTSIDE
REF. 124
PAG. 76



ALBERTA DUE
REF. 121
PAG. 84



ALBERTA
REF. 120
PAG. 96


ALBERTA SOFT CONNECT

NEW


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE



TECHNICAL INFORMATION

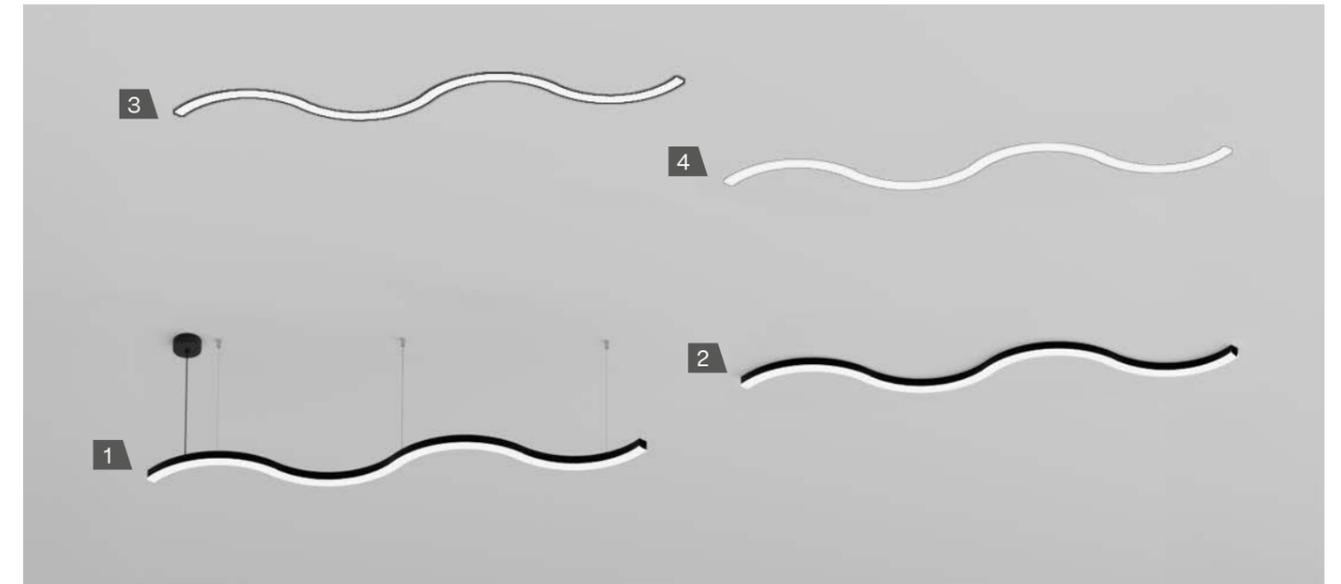


1. PENDANT - PENDANT UP LIGHT

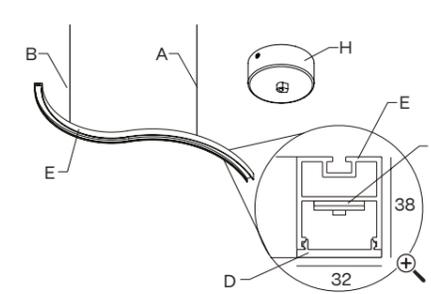


IP40

2. SURFACE

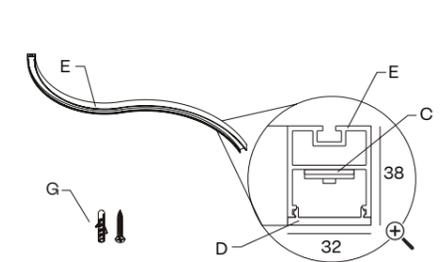


IP40

3. RECESSED WITH FRAME

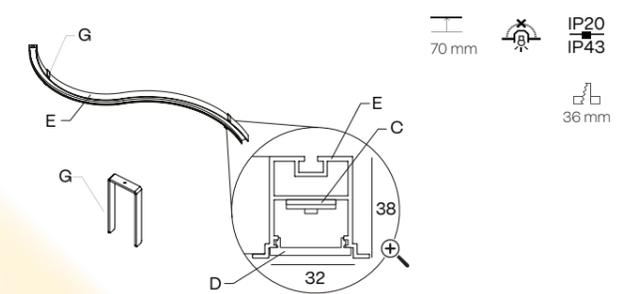

70 mm
IP20
IP43

4. TRIMLESS

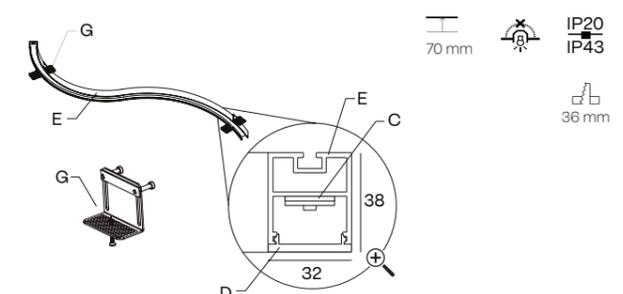

70 mm
IP20
IP43

HEIGHT mm.
38

- A - 3x aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser

- E - Aluminium profile
- G - Mounting kit
- H - Included connection box


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

CUSTOM

PENDANT COMPONENTS

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60			
		800 mm	SC20.80			
		1000 mm	SC20.100			

BUILD YOUR PERFECT LUMINAIRE (EXAMPLE)

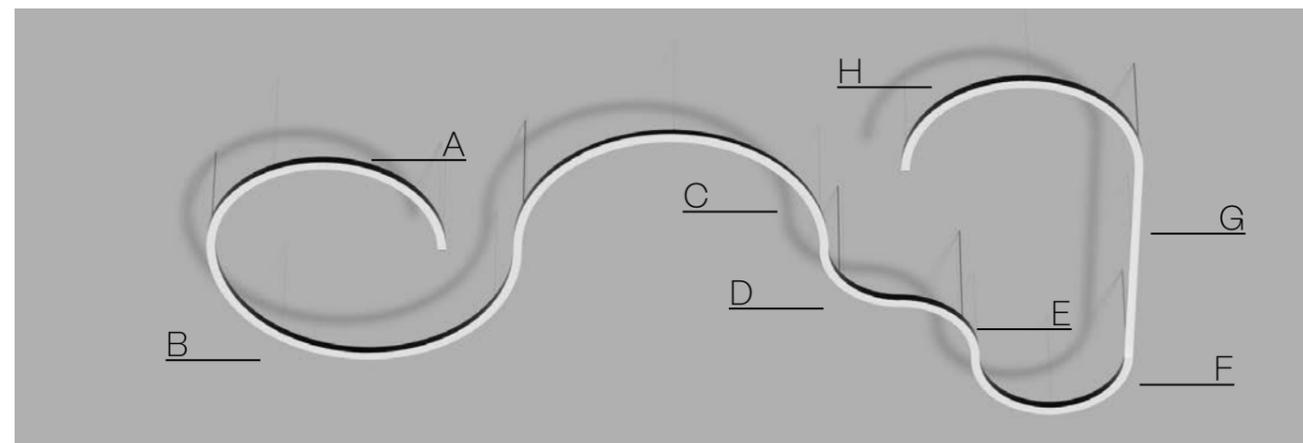

SECTION	A	B	C	D	E	F	G	H
SEGMENT	4	7	7	3	3	2	10	4

SEGMENT 1	SEGMENT 2	SEGMENT 3	SEGMENT 4	SEGMENT 5	SEGMENT 6	SEGMENT 7
Ø450 90°	Ø450 180°	Ø650 90°	Ø650 180°	Ø950 180°	Ø1250 90°	Ø1250 180°
141ED1B312O	141EF1B312O	141EG1B312O	141EH1B312O	141EM1B312O	141EO1B312O	141EQ1B312O

SEGMENT 8	SEGMENT 9	SEGMENT 10	SEGMENT 11	SEGMENT 12	SEGMENT 13
843 mm	1124 mm	1405 mm	1686 mm	1967 mm	2248 mm
141EH1B312O	141EJ1B312O	141EL1B312O	141EN1B312O	141EP1B312O	141ER1B312O

Dimensions without end caps.

FINISH

- B · Black
- W · White
- S · Special color

ON DEMAND OPTIONS

- Special finishes
- Number switches
- Tunable white
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER HIGH


		Ø450 90°	Ø450 180°	Ø650 90°	Ø650 180°	Ø950 180°	Ø1250 90°	Ø1250 180°
24 V	4 W 279 - 310 - 341 lm	8 W 559 - 621 - 683 lm	6 W 403 - 448 - 493 lm	12 W 807 - 896 - 986 lm	17 W 1179 - 1310 - 1441 lm	11 W 776 - 862 - 948 lm	22 W 1552 - 1724 - 1896 lm	
700 mA	19 W 1771 - 1780 - 1937 lm	38 W 3543 - 3561 - 3873 lm	19 W 2196 - 2260 - 2422 lm	44 W 4393 - 4520 - 4844 lm	66 W 6649 - 6760 - 7352 lm	44 W 4454 - 4530 - 4534 lm	88 W 8908 - 9059 - 9068 lm	
Silicone	2700 K	141ED 312	141EF 312	141EG 312	141EI 312	141EM 312	141EO 312	141EQ 312
	3000 K	141ED 313	141EF 313	141EG 313	141EI 313	141EM 313	141EO 313	141EQ 313
	4000 K	141ED 315	141EF 315	141EG 315	141EI 315	141EM 315	141EO 315	141EQ 315

		.03	.04	.05	.06	.07	.08
24 V	9 W 593 - 659 - 724 lm	11 W 790 - 878 - 966 lm	14 W 988 - 1098 - 1207 lm	17 W 1185 - 1317 - 1449 lm	20 W 1383 - 1537 - 1690 lm	23 W 1580 - 1756 - 1932 lm	
700 mA	42 W 3668 - 3987 - 4306 lm	56 W 4891 - 5316 - 5741 lm	70 W 6113 - 6645 - 7177 lm	84 W 7336 - 7974 - 8612 lm	98 W 8559 - 9303 - 10047 lm	112 W 9781 - 10632 - 11483 lm	
Silicone	2700 K	141EH 312	141EJ 312	141EL 312	141EN 312	141EP 312	141ER 312
	3000 K	141EH 313	141EJ 313	141EL 313	141EN 313	141EP 313	141ER 313
	4000 K	141EH 315	141EJ 315	141EL 315	141EN 315	141EP 315	141ER 315

Dimensions without end caps.

Total length = Electrical system length + 2 x 4 mm (Ends) + Cover Kit mm

Silicone



When closing the luminaire, add 22 mm (11 mm per end cap).

The data shown corresponds to raw values.

INSTALLATION

- Pendant
- Pendant up light
- Surface
- Recessed with frame
- Trimless

FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS


- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Up light


- Down light

ALBERTA SLIGHT CONNECT

NEW

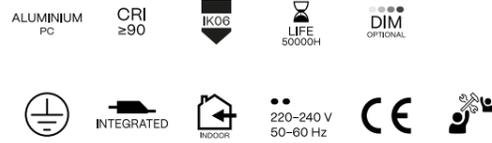


INSTALLATION

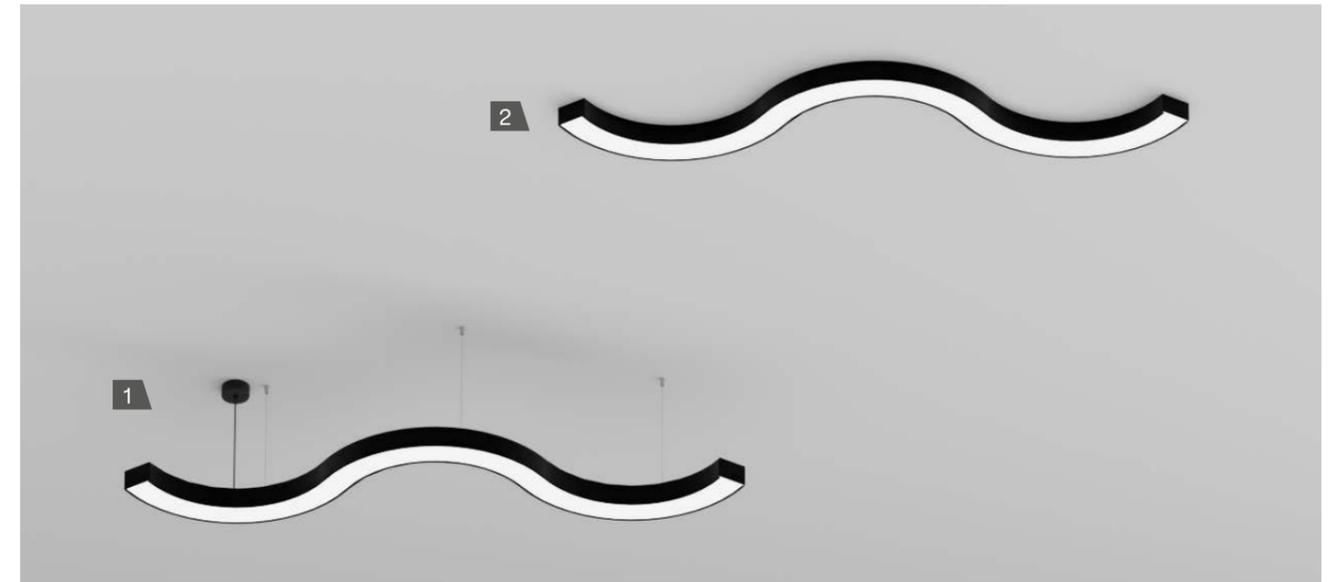


1. PENDANT - PENDANT UP LIGHT

2. SURFACE

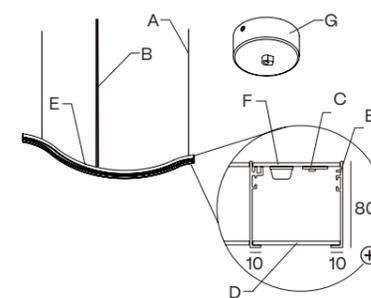

IP40

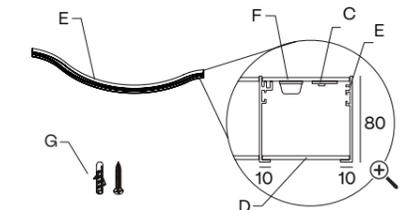

IP40

HEIGHT mm.
80

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser


E - Aluminium profile
F - Aluminium cover
G - Included connection box

CUSTOM

PENDANT COMPONENTS

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60			
		800 mm	SC20.80			
		1000 mm	SC20.100			

BUILD YOUR PERFECT LUMINAIRE (EXAMPLE)

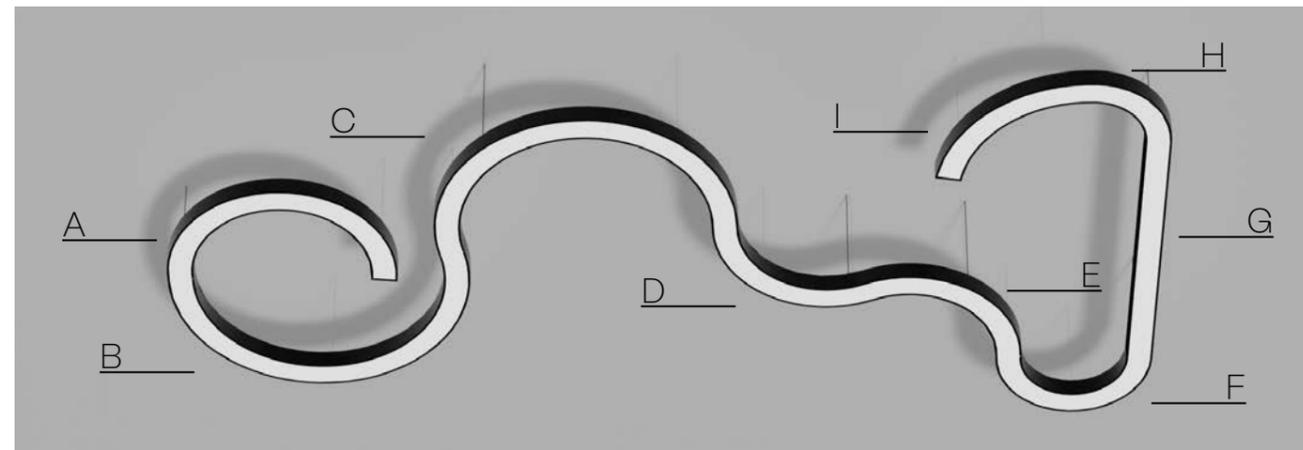

SECTION	A	B	C	D	E	F	G	H	I
SEGMENT	4	6	6	3	3	2	9	1	3

SEGMENT 1	SEGMENT 2	SEGMENT 3	SEGMENT 4	SEGMENT 5	SEGMENT 6	SEGMENT 7	SEGMENT 8	SEGMENT 9	SEGMENT 10	SEGMENT 11	SEGMENT 12
Ø650 90°	Ø650 180°	Ø950 90°	Ø950 180°	Ø1250 90°	Ø1250 180°	843 mm	1124 mm	1405 mm	1686 mm	1967 mm	2248 mm
126EG1B1120	126E1B1120	126EK1B1120	126EM1B1120	126EO1B1120	126EQ1B1120	126EH1B1120	126EJ1B1120	126EL1B1120	126EN1B1120	126EP1B1120	126ER1B1120

Dimensions without end caps.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- Number switches
- Custom dimensions
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

TECHNICAL INFORMATION


POWER STANDARD

		Ø650 90°	Ø650 180°	Ø950 90°	Ø950 180°	Ø1250 90°	Ø1250 180°
	24 V	6 W 403 - 448 - 493 lm	12 W 807 - 896 - 986 lm	9 W 590 - 655 - 721 lm	17 W 1179 - 1310 - 1441 lm	11 W 776 - 862 - 948 lm	22 W 1552 - 1724 - 1896 lm
	700 mA	15 W 1481 - 1556 - 1633 lm	29 W 2963 - 3111 - 3267 lm	29 W 2469 - 2593 - 2722 lm	49 W 4938 - 5185 - 5444 lm	29 W 2963 - 3111 - 3267 lm	29 W 6420 - 6741 - 7078 lm
	2700 K	126EG 1 2	126EI 1 2	126EK 1 2	126EM 1 2	126EO 1 2	126EQ 1 2
	3000 K	126EG 1 3	126EI 1 3	126EK 1 3	126EM 1 3	126EO 1 3	126EQ 1 3
	4000 K	126EG 1 5	126EI 1 5	126EK 1 5	126EM 1 5	126EO 1 5	126EQ 1 5

		.03	.04	.05	.06	.07	.08
	24 V	10 W 666 - 740 - 814 lm	13 W 888 - 987 - 1086 lm	16 W 1110 - 1234 - 1357 lm	19 W 1332 - 1480 - 1628 lm	22 W 1551 - 1724 - 1896 lm	26 W 1776 - 1924 - 2171 lm
	700 mA	29 W 2963 - 3111 - 3267 lm	39 W 3950 - 4148 - 4355 lm	49 W 4938 - 5185 - 5444 lm	59 W 5926 - 6222 - 6533 lm	69 W 6913 - 7259 - 7622 lm	78 W 7901 - 8296 - 8711 lm
	2700 K	126EH 1 2	126EJ 1 2	126EL 1 2	126EN 1 2	126EP 1 2	126ER 1 2
	3000 K	126EH 1 3	126EJ 1 3	126EL 1 3	126EN 1 3	126EP 1 3	126ER 1 3
	4000 K	126EH 1 5	126EJ 1 5	126EL 1 5	126EN 1 5	126EP 1 5	126ER 1 5

Dimensions without end caps.

Total length = Electrical system length + 2 x 4 mm (Ends) + Cover Kit mm

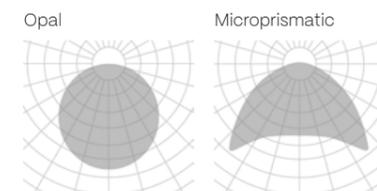

Add 22 mm when the luminaire is closed (11 mm per end cap).

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface

FINISH

- B · Black
- W · White
- S · Special color

DIFFUSER

- 1 · Opal
- 2 · Microprismatic

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Up light

- Up light
- Down light


ALBERTA SOFT STONE

NEW


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

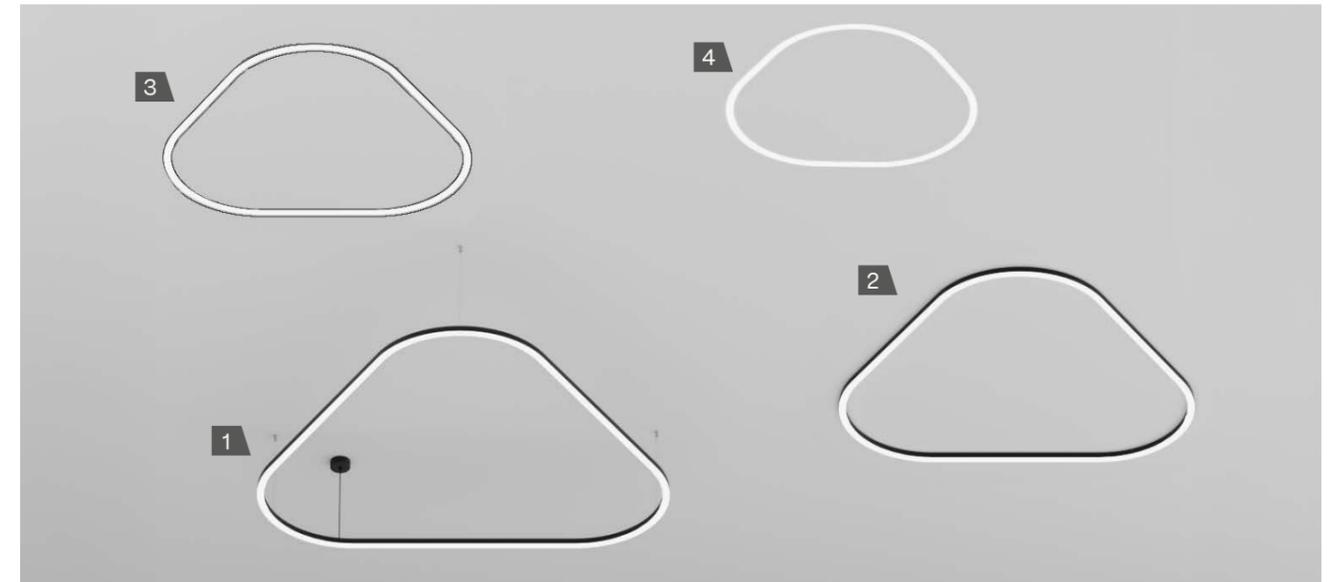


1. PENDANT

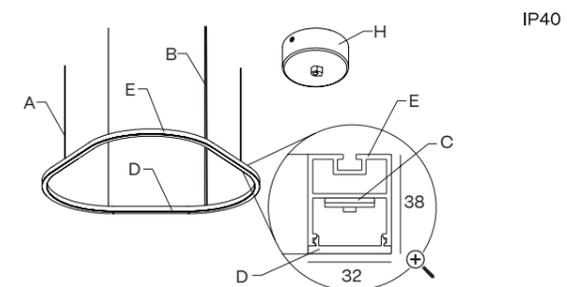


2. SURFACE

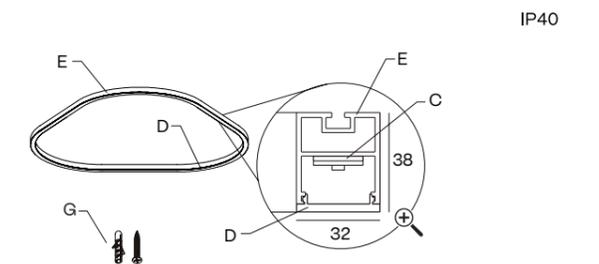

3. RECESSED WITH FRAME

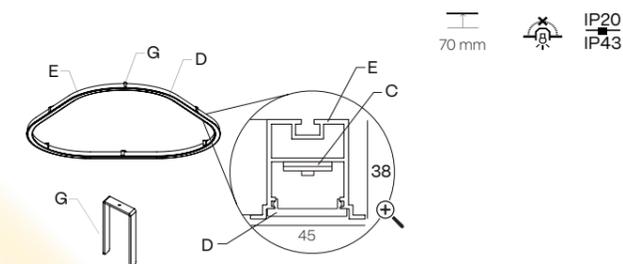

4. TRIMLESS

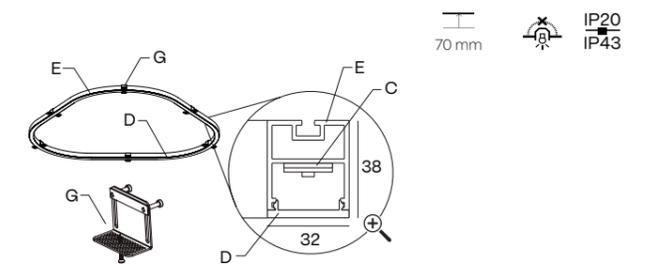

WIDTH x LENGTH mm.
1167 x 1201 · 1385 x 1452 · 1602 x 1703
1818 x 1952

HEIGHT mm.
38

A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser

E – Aluminium profile
G – Mounting kit
H – Included connection box

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10		 Ø85 + CB10	.35	SC21
	 26 Ø150	.45 .65	CB02		 Ø125 + CB02	.45 .65	SC22
	 47 Ø310	.95 .125 .150	CB05		 Ø215 + CB05	.95 .125 .150	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER HIGH


		1167 x 1201	1385 x 1452	1602 x 1703	1818 x 1952
	24 V	42 W 2924 - 3249 - 3573 lm	51 W 3516 - 3907 - 4298 lm	59 W 4109 - 4566 - 5022 lm	68 W 4702 - 5224 - 5747 lm
	700 mA	174 W 16966 - 17506 - 19009 lm	216 W 20634 - 21494 - 23315 lm	258 W 24302 - 25480 - 27621 lm	300 W 27970 - 29467 - 31927 lm
	Silicone	2700 K	144EB 312	144EE 312	144EH 312
3000 K		144EB 313	144EE 313	144EH 313	144EJ 313
4000 K		144EB 315	144EE 315	144EH 315	144EJ 315

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Number switches
- Tunable white
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

Silicone



The data shown corresponds to raw values.

INSTALLATION

- Pendant
- Pendant up light
- Surface
- Recessed with frame
- Trimless

FINISH
B · Black
W · White
S · Special color

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Up light
 Down light

ALBERTA SOFT LOOP

NEW


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000h
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

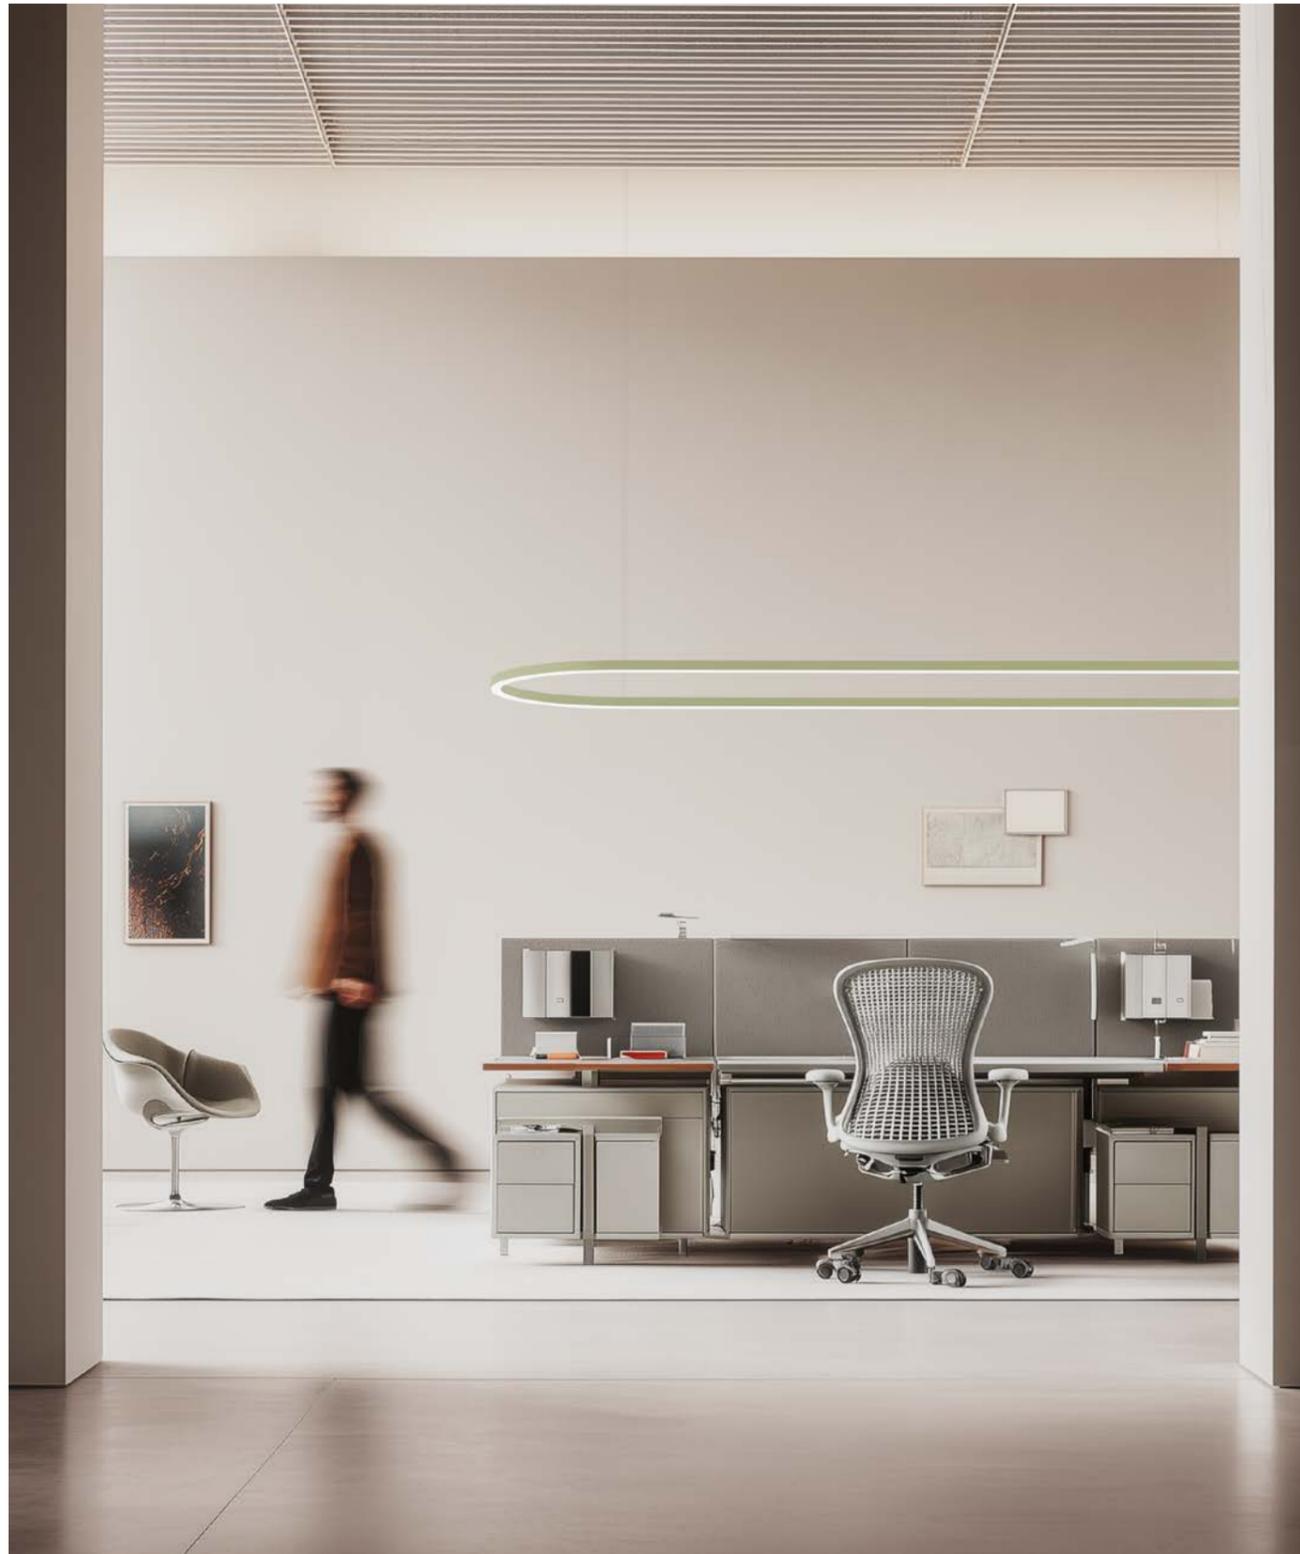


INSTALLATION




1. PENDANT

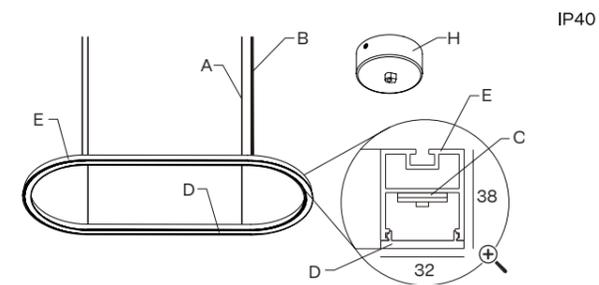


2. SURFACE

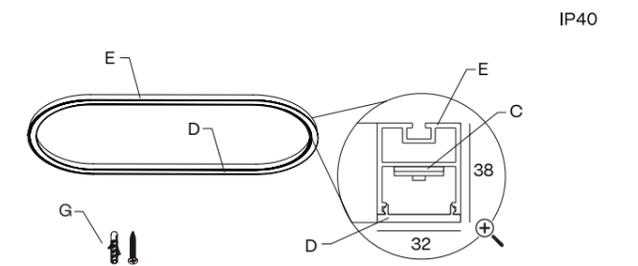

3. RECESSED WITH FRAME

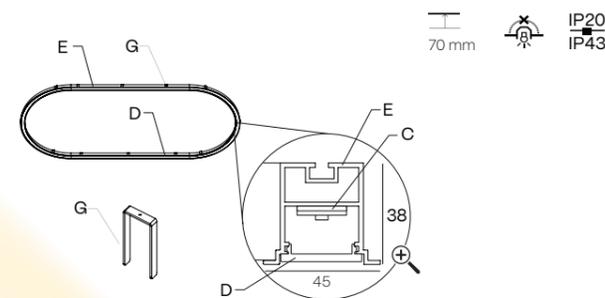

4. TRIMLESS

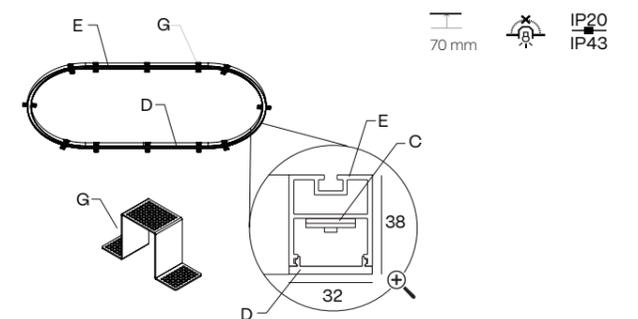

WIDTH x LENGTH mm.
650 x 1402 · 950 x 1955

HEIGHT mm.
38

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60			
		800 mm	SC20.80			
		1000 mm	SC20.100			

TECHNICAL INFORMATION

POWER HIGH


		650 x 1402 mm	950 x 1955 mm
Silicone	700 mA	216 W 20514 - 21535 - 23143 lm	244 W 23079 - 24151 - 26186 lm
	2700 K	142EF 312	142EI 312
	3000 K	142EF 313	142EI 313
	4000 K	142EF 315	142EI 315

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Number switches
- Tunable white
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

Silicone



The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless

FINISH

- B** · Black
- W** · White
- S** · Special color


DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

- Up light
- Down light

ALBERTA INSIDE HAT


NEW

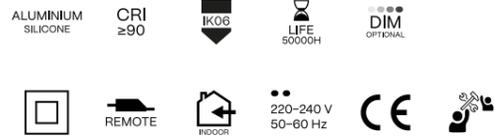

INSTALLATION



1. PENDANT

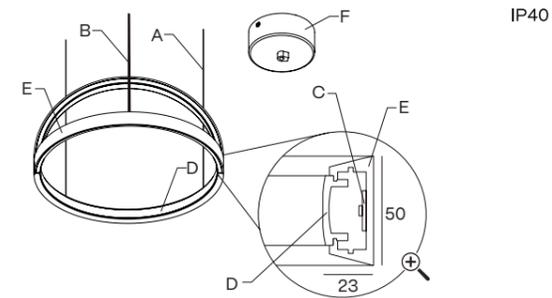

DIAMETERS mm.

650 - 950

HEIGHT mm.

50

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe



D - Diffuser

E - Aluminium profile

F - Included connection box



COMPONENTS

PENDANT

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION


POWER STANDARD

			
		375 Ø650	525 Ø950
	24 V	88 W 6888 - 7439 - 8167 lm	129 W 10066 - 10873 - 11936 lm
Silicone	2700 K	123EF  112 	123EI  112 
	3000 K	123EF  113 	123EI  113 
	4000 K	123EF  115 	123EI  115 

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- ON DEMAND OPTIONS**
-  Special finishes
 -  Custom dimensions
 -  Tunable white
 -  RGB

Silicone



The data shown corresponds to raw values.


- INSTALLATION**
- 1** · Pendant

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

 Inside light

ALBERTA SLIGHT ECCENTRIC

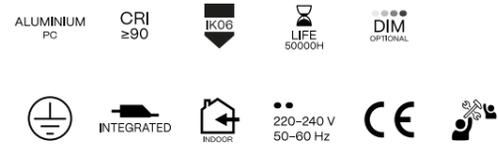


INSTALLATION




1. PENDANT - PENDANT UP LIGHT

2. SURFACE

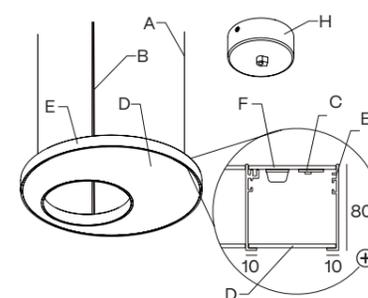

IP40

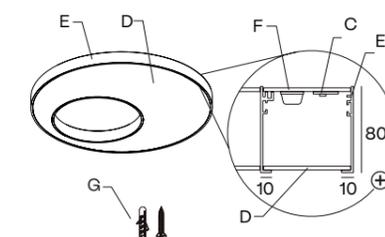

IP40

DIAMETERS mm.

650 · 950 · 1250

HEIGHT mm.

80

A - 3x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser

E - Aluminium profile



F - Aluminium cover




G - Mounting kit

H - Included connection box

COMPONENTS

PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 26 Ø150	.65	CB02		 Ø125 + 	.65	SC22
	 47 Ø310	.95 .125	CB05		 Ø215 + 	.95 .125	SC23


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 -  Special finishes
 -  Special color temperatures
 -  Number switches
 -  Emergency lighting
 -  Motion detection
 -  Wireless control options
 -  Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø235 - Ext. Ø650	 Int. Ø430 - Ext. Ø950	 Int. Ø730 - Ext. Ø1250
24 V		25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
		49 W 4938 - 5185 - 5444 lm	49 W 7901 - 8296 - 8711 lm	49 W 11851 - 12444 - 13066 lm
	Opal	2700 K 127EF    	3000 K 127EF    	4000 K 127EF    
Microprismatic	2700 K 127EF    	3000 K 127EF    	4000 K 127EF    	

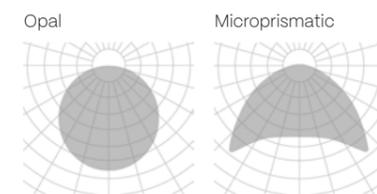

The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
-  Up light
-  Down light

ALBERTA SOFT OUTSIDE


NEW



INSTALLATION

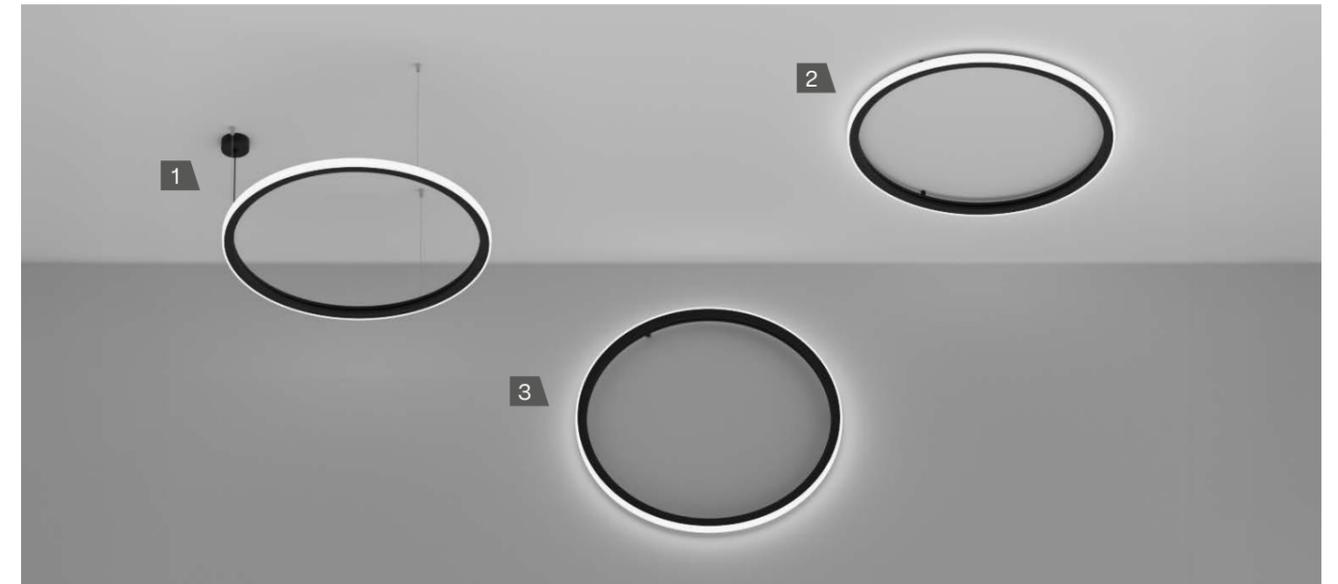


1. PENDANT

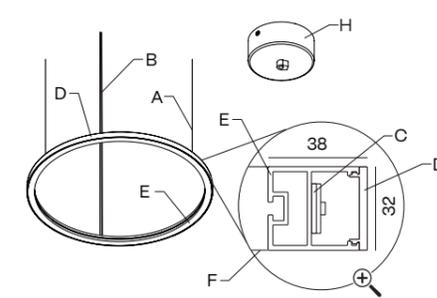


IP40

2. SURFACE

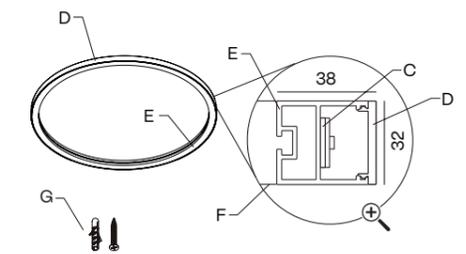

IP40

3. WALL SURFACE

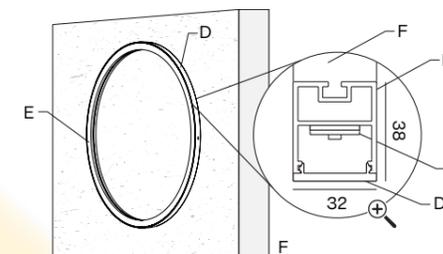

IP40

DIAMETERS mm.

950 · 1250

HEIGHT mm.

50

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe

D - Diffuser

E - Aluminium profile

G - Mounting kit

H - Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	40 Ø102	.35	CB10		Ø85 + CB10	.35	SC21
	26 Ø150	.45 .65	CB02		Ø125 + CB02	.45 .65	SC22
	47 Ø310	.95 .125 .150	CB05		Ø215 + CB05	.95 .125 .150	SC23


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER HIGH

		Int. Ø886 - Ext. Ø950	Int. Ø1186 - Ext. Ø1250
	700 mA	86 W 6711 - 7248 - 7957 lm	113 W 8830 - 9537 - 10470 lm
Silicone	2700 K	143EI 112	143EK 112
	3000 K	143EI 113	143EK 113
	4000 K	143EI 115	143EK 115

Silicone



The data shown corresponds to raw values.

FINISH

- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS

- Special finishes
- Number switches
- Tunable white
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

INSTALLATION

- 1** · Pendant
- 3** · Surface
- 7** · Wall Surface

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 110v

Outside light


ALBERTA OUTSIDE

NEW


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE



INSTALLATION

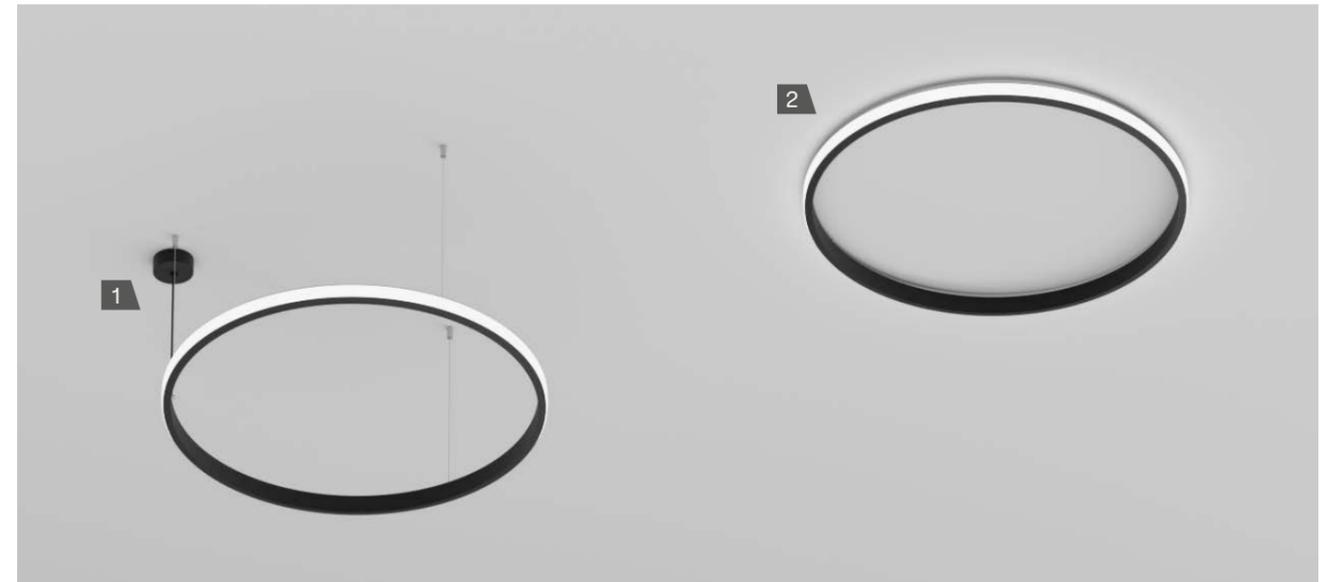


1. PENDANT

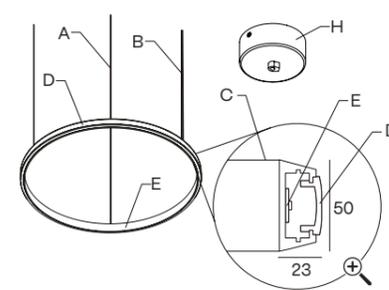

IP40

2. SURFACE

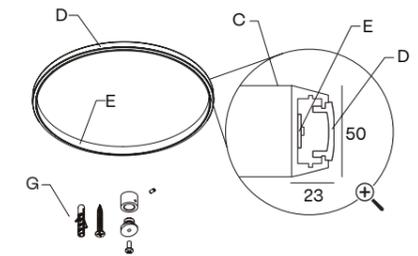

IP40

DIAMETERS mm.

450 · 650 · 950 · 1250
1500 · 2000 · 3000 · 4000

HEIGHT mm.

50

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe

D - Diffuser

E - Aluminium profile




G - Mounting kit

H - Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 26 Ø150	.45 .65	CB02		 Ø125 +  CB02	.45 .65	SC22
	 47 Ø310	.95 .125	CB05		 Ø215 +  CB05	.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

FINISH
B · Black
W · White
S · Special color


ON DEMAND OPTIONS
 Special finishes
 Custom dimensions
 Tunable white
 RGB

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø404 - Ext. Ø450	 Int. Ø604 - Ext. Ø650	 Int. Ø904 - Ext. Ø950	 Int. Ø1204 - Ext. Ø1250
 24 VdC		41 W 3179 - 3433 - 3769 lm	59 W 4592 - 4959 - 5445 lm	86 W 6711 - 7248 - 7957 lm	113 W 8830 - 9537 - 10470 lm
Silicone	2700 K	124ED   112 	124EF   112 	124EI   112 	124EK   112 
	3000 K	124ED   113 	124EF   113 	124EI   113 	124EK   113 
	4000 K	124ED   115 	124EF   115 	124EI   115 	124EK   115 

Silicone



The data shown corresponds to raw values.

INSTALLATION
1 · Pendant
3 · Surface

FINISH
B · Black
W · White
S · Special color

DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v


 Inside light

ALBERTA INSIDE


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE



INSTALLATION

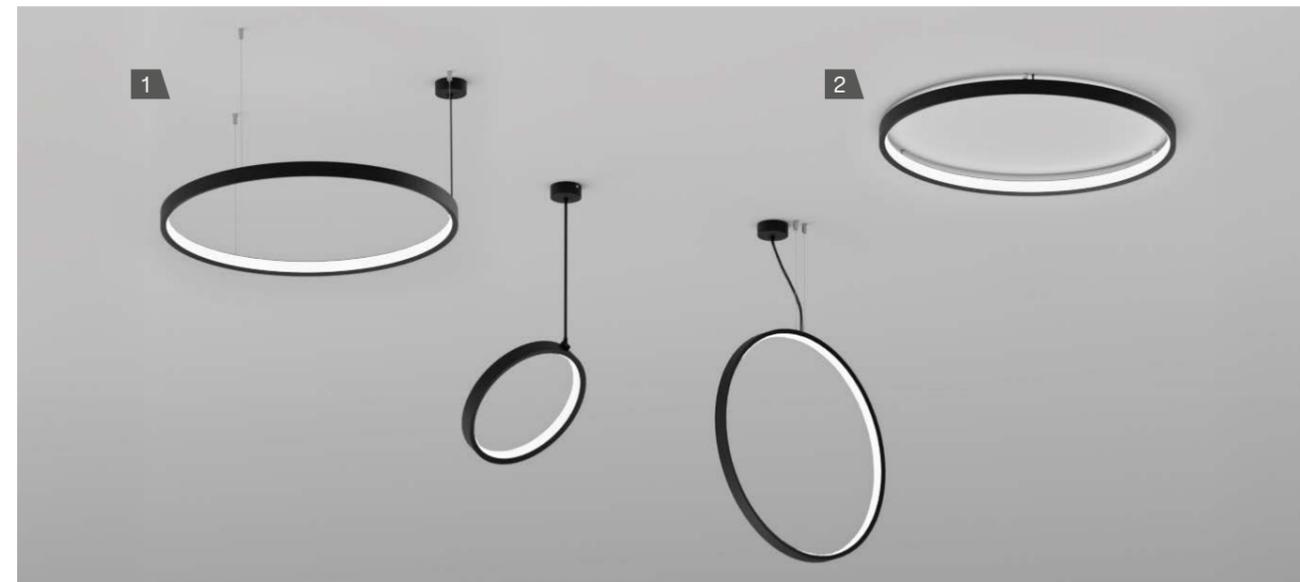


1. PENDANT

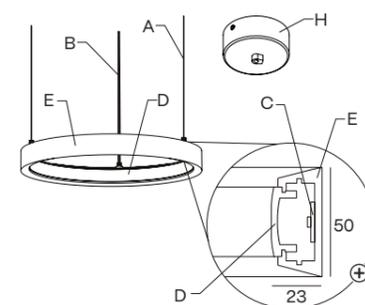

IP40

2. SURFACE

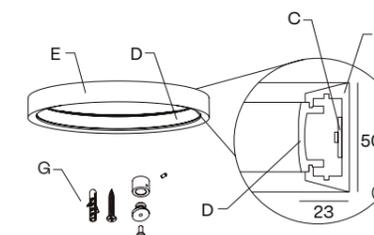

IP40

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.
50

A - 3x aircraft cable (3 m)
B - Power cable
C - LED stripe
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	40 Ø102	.25 .35	CB10
	26 Ø150	.45 .65	CB02
	47 Ø310	.95 .125	CB05

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	Ø85 + CB10	.25 .35	SC21
	Ø125 + CB02	.45 .65	SC22
	Ø215 + CB05	.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

VERTICAL ACCESSORY

ALBERTA INSIDE VERTICAL PENDANT SYSTEM	CONNECTION BOX	DIMENSION	REFERENCE
		3m	.35 A122HB1XXX
			.45 A122HE1XXX
			.65 A122HH1XXX
			.95 A122HJ1XXX
			.125 A122HL1XXX

VTILT ACCESSORY

ALBERTA INSIDE VTILT ROD	CONNECTION BOX	DIMENSION	REFERENCE
		800 mm	.35 A122HB2XXX
		1000 mm	.45 A122HE2XXX

EXTRA ALBERTA INSIDE VTILT ROD	DIMENSION	REFERENCE
	800 mm	SC20.80
	1000 mm	SC20.100

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS
 Special finishes
 Custom dimensions
 Tunable white
 RGB

TECHNICAL INFORMATION

POWER STANDARD

		Int. Ø204 - Ext. Ø250	Int. Ø304 - Ext. Ø350	Int. Ø404 - Ext. Ø450	Int. Ø604 - Ext. Ø650	Int. Ø904 - Ext. Ø950	Int. Ø1204 - Ext. Ø1250
Silicone	24 VdC	24 W 1766 - 1907 - 2094 lm	32 W 3407 - 2670 - 2932 lm	41 W 3179 - 3433 - 3769 lm	59 W 4592 - 4959 - 5445 lm	86 W 6711 - 7248 - 7957 lm	113 W 8830 - 9537 - 10470 lm
	2700 K	122EB 112	122EC 112	122ED 112	122EF 112	122EI 112	122EK 112
	3000 K	122EB 113	122EC 113	122ED 113	122EF 113	122EI 113	122EK 113
	4000 K	122EB 115	122EC 115	122ED 115	122EF 115	122EI 115	122EK 115



The data shown corresponds to raw values.

INSTALLATION
1 · Pendant
3 · Surface

FINISH
B · Black
W · White
S · Special color

DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v

Inside light

ALBERTA DUE


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 HZ
- CE



INSTALLATION




1. PENDANT

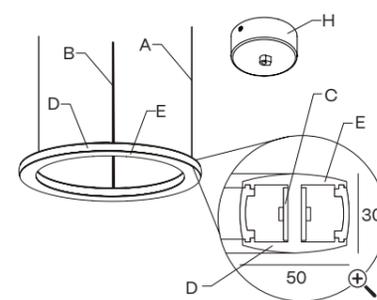

IP40

2. SURFACE

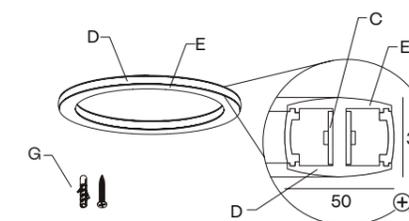

IP40

DIAMETERS mm.
260 · 360 · 460 · 660 · 960 · 1260






HEIGHT mm.
30

A - 3x aircraft cable (3 m)
B - Power cable
C - LED stripe
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Included connection box


COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.25 .35	CB10		 + 	.25 .35	SC21
	 26 Ø150	.45 .65	CB02		 + 	.45 .65	SC22
	 47 Ø310	.95 .125	CB05		 + 	.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

MOVE ACCESSORY

ALBERTA DUE MOVE TILT ROD	CONNECTION BOX	DIMENSIONS	REFERENCE
		.35	A121HB1XXX
		.45	A121HE1XXX

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color


- ON DEMAND OPTIONS**
-  Special finishes
 -  Number switches
 -  Tunable white
 -  RGB

TECHNICAL INFORMATION

POWER STANDARD

							
		Int. Ø160 - Ext. Ø260	Int. Ø260 - Ext. Ø360	Int. Ø360 - Ext. Ø460	Int. Ø560 - Ext. Ø660	Int. Ø860 - Ext. Ø960	Int. Ø1160 - Ext. Ø1260
Silicone	24 VdC	23 W 1698 - 2026 - 2419 lm	32 W 2377 - 2837 - 3387 lm	41 W 3056 - 3647 - 4354 lm	59 W 4415 - 5268 - 6289 lm	86 W 6453 - 7700 - 9192 lm	113 W 8490 - 10132 - 12095 lm
	2700 K	121EB  112 	121EC  112 	121ED  112 	121EF  112 	121EI  112 	121EK  112 
	3000 K	121EB  113 	121EC  113 	121ED  113 	121EF  113 	121EI  113 	121EK  113 
4000 K	121EB  115 	121EC  115 	121ED  115 	121EF  115 	121EI  115 	121EK  115 	

Silicone



The data shown corresponds to raw values.

- INSTALLATION**
- 1** · Pendant
 - 3** · Surface

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v


 Outside/Inside light

ALBERTA SOFT


- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

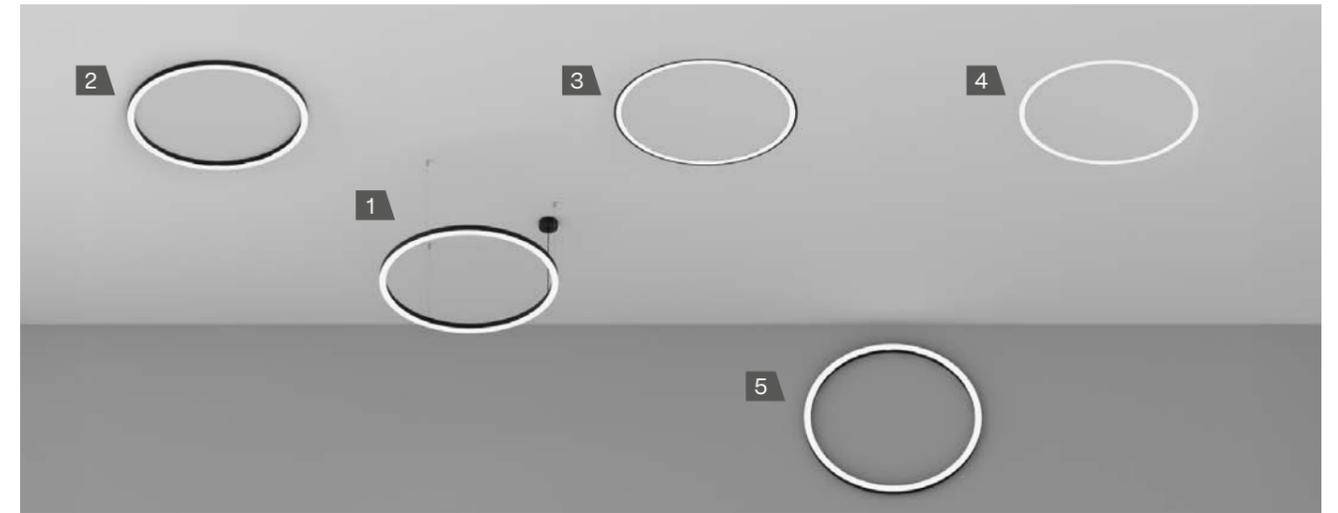


1. PENDANT - PENDANT UP LIGHT

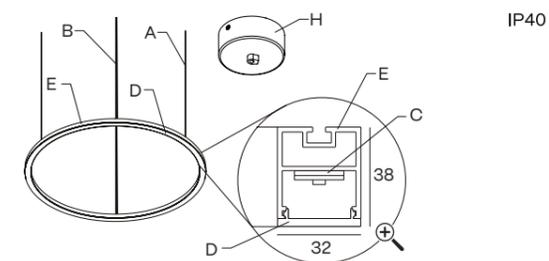


2. SURFACE

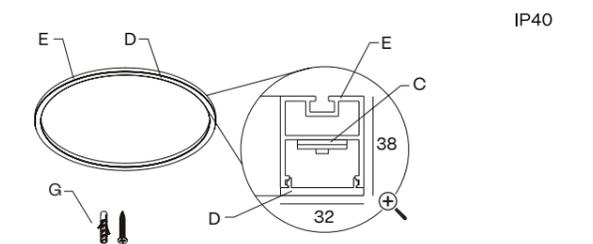


3. RECESSED WITH FRAME

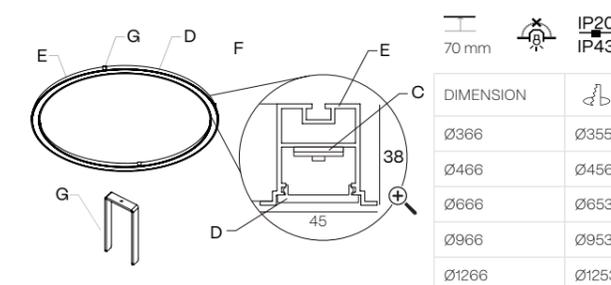

4. TRIMLESS

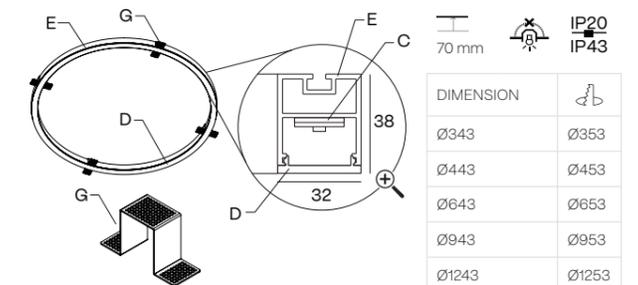

5. WALL SURFACE ⌀350 mm to ⌀1250 mm

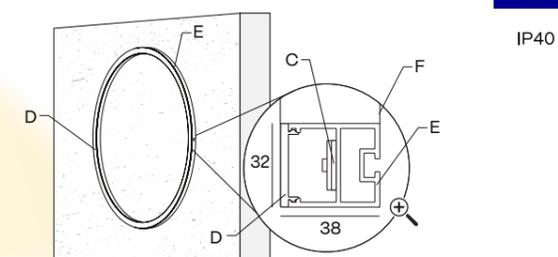

DIAMETERS mm.
 350 · 450 · 650 · 950 · 1250 · 1500
 2000 · 2500 · 3000 · 3500 · 4000
 5000 · 6000
HEIGHT mm.
 38

A - 3x aircraft cable (3 m)
B - Power cable
C - LED stripe
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10		 Ø85 + CB10	.35	SC21
	 26 Ø150	.45 .65	CB02		 Ø125 + CB02	.45 .65	SC22
	 47 Ø310	.95 .125 .150	CB05		 Ø215 + CB05	.95 .125 .150	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION


POWER HIGH

		 Int. Ø286 - Ext. Ø350	 Int. Ø386 - Ext. Ø450	 Int. Ø586 - Ext. Ø650	 Int. Ø886 - Ext. Ø950	 Int. Ø1186 - Ext. Ø1250
24 V	13 W	18 W	25 W	37 W	48 W	
	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm	
	700 mA	56 W	76 W	88 W	132 W	176 W
		5280 - 5316 - 5844 lm	7086 - 7121 - 7747 lm	8785 - 9040 - 9687 lm	13298 - 13519 - 14703 lm	17816 - 18118 - 18135 lm
Silicone	2700 K	140EC 312	140ED 312	140EF 312	140EI 312	140EK 312
	3000 K	140EC 313	140ED 313	140EF 313	140EI 313	140EK 313
	4000 K	140EC 315	140ED 315	140EF 315	140EI 315	140EK 315

		 Int. Ø1436 - Ext. Ø1500	 Int. Ø1936 - Ext. Ø2000	 Int. Ø2436 - Ext. Ø2500	 Int. Ø2936 - Ext. Ø3000
24 V	35 W	46 W	57 W	69 W	
	4174 - 4465 - 4794 lm	5595 - 5985 - 6426 lm	6927 - 7410 - 7956 lm	8437 - 8930 - 9588 lm	
	500 mA	178 W	240 W	301 W	351 W
		26176 - 31008 - 33376 lm	35174 - 41667 - 44849 lm	44172 - 52326 - 56322 lm	51534 - 61047 - 65709 lm
Silicone	2700 K	140EM 312	140ER 312	140ET 312	140EW 312
	3000 K	140EM 313	140ER 313	140ET 313	140EW 313
	4000 K	140EM 315	140ER 315	140ET 315	140EW 315

		 Int. Ø3436 - Ext. Ø3500	 Int. Ø3936 - Ext. Ø4000	 Int. Ø4936 - Ext. Ø5000	 Int. Ø5936 - Ext. Ø6000
24 V	132 W	92 W	115 W	138 W	
	N/A - 10450 - 11220 lm	11189 - 11970 - 12852 lm	13942 - 14915 - 16014 lm	16872 - 17955 - 19278 lm	
	500 mA	423 W	473 W	602 W	713 W
		62168 - 73644 - 79268 lm	69530 - 82365 - 88655 lm	88344 - 104652 - 112644 lm	104704 - 124032 - 133504 lm
Silicone	2700 K	140EX 312	140EY 312	140EZ 312	125EN 312
	3000 K	140EX 313	140EY 313	140EZ 313	125EN 313
	4000 K	140EX 315	140EY 315	140EZ 315	125EN 315

Silicone



The data shown corresponds to raw values.

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Number switches
- Tunable white
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

INSTALLATION

- Pendant
- Pendant up light
- Surface
- Recessed with frame
- Trimless
- Wall Surface

FINISH
B · Black
W · White
S · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Up light
 Down light

ALBERTA SLIGHT

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

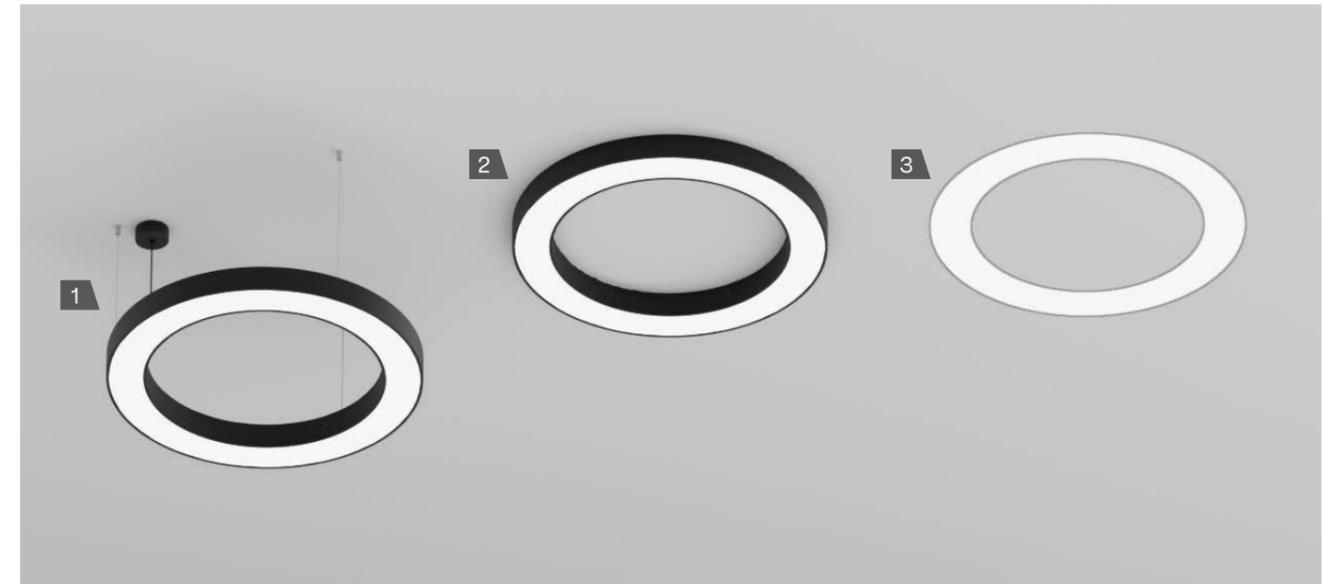


1. PENDANT - PENDANT UP LIGHT

2. SURFACE

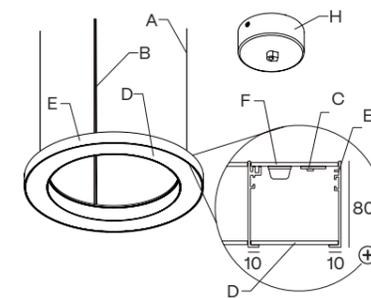


IP40

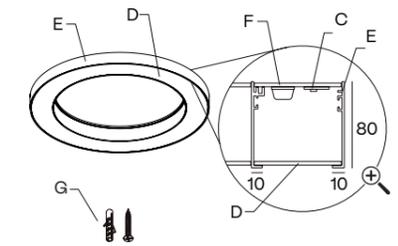

IP40

3. TRIMLESS

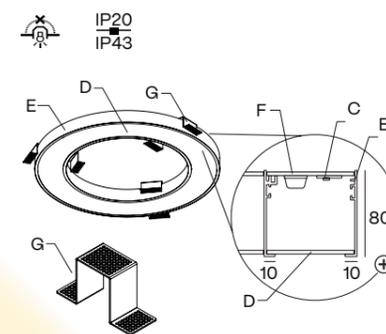

IP20
IP43

NEW

DIMENSION	db	DIMENSION	db
Int. Ø230 Ext. Ø450	Int. Ø229 Ext. Ø453	Int. Ø2220 Ext. Ø2500	Int. Ø2219 Ext. Ø2503
Int. Ø430 Ext. Ø650	Int. Ø429 Ext. Ø653	Int. Ø2720 Ext. Ø3000	Int. Ø2719 Ext. Ø3003
Int. Ø710 Ext. Ø950	Int. Ø709 Ext. Ø953	Int. Ø3720 Ext. Ø4000	Int. Ø3719 Ext. Ø4003
Int. Ø990 Ext. Ø1250	Int. Ø989 Ext. Ø1253	Int. Ø4700 Ext. Ø5000	Int. Ø4699 Ext. Ø5003
Int. Ø1240 Ext. Ø1500	Int. Ø1239 Ext. Ø1503	Int. Ø5700 Ext. Ø6000	Int. Ø5699 Ext. Ø6003
Int. Ø1740 Ext. Ø2000	Int. Ø1739 Ext. Ø2003		

DIAMETERS mm.
450 · 650 · 950 · 1250 · 1500 · 2000
2500 · 3000 · 4000 · 5000 · 6000

HEIGHT mm.
80



A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser




E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.45 .65	CB02			.45 .65	SC22
		.95 .125	CB05			.95 .125	SC23


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER STANDARD

							
		Int. Ø230 - Ext. Ø450	Int. Ø430 - Ext. Ø650	Int. Ø710 - Ext. Ø950	Int. Ø990 - Ext. Ø1250	Int. Ø1240 - Ext. Ø1500	Int. Ø1740 - Ext. Ø2000
24 V	18 W	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm	4174 - 4300 - 4554 lm	5595 - 5765 - 6105 lm
	700 mA	32 W	49 W	78 W	118 W	137 W	196 W
Opal	2700 K	125ED  112 	125EF  112 	125EI  112 	125EK  112 	125EM  112 	125ER  112 
	3000 K	125ED  113 	125EF  113 	125EI  113 	125EK  113 	125EM  113 	125ER  113 
	4000 K	125ED  115 	125EF  115 	125EI  115 	125EK  115 	125EM  115 	125ER  115 
Microprismatic	2700 K	125ED  122 	125EF  122 	125EI  122 	125EK  122 	125EM  122 	125ER  122 
	3000 K	125ED  123 	125EF  123 	125EI  123 	125EK  123 	125EM  123 	125ER  123 
	4000 K	125ED  125 	125EF  125 	125EI  125 	125EK  125 	125EM  125 	125ER  125 

						
		Int. Ø2220 - Ext. Ø2500	Int. Ø2720 - Ext. Ø3000	Int. Ø3720 - Ext. Ø4000	Int. Ø4700 - Ext. Ø5000	Int. Ø5700 - Ext. Ø6000
24 V	57 W	6927 - 7137 - 7559 lm	8437 - 8693 - 9206 lm	11189 - 11529 - 12210 lm	13942 - 14366 - 15213 lm	16872 - 17385 - 18411 lm
	700 mA	235 W	314 W	412 W	470 W	588 W
Opal	2700 K	125ET  112 	125EW  112 	125EY  112 	125EZ  112 	125EN  112 
	3000 K	125ET  113 	125EW  113 	125EY  113 	125EZ  113 	125EN  113 
	4000 K	125ET  115 	125EW  115 	125EY  115 	125EZ  115 	125EN  115 
Microprismatic	2700 K	125ET  122 	125EW  122 	125EY  122 	125EZ  122 	125EN  122 
	3000 K	125ET  123 	125EW  123 	125EY  123 	125EZ  123 	125EN  123 
	4000 K	125ET  125 	125EW  125 	125EY  125 	125EZ  125 	125EN  125 

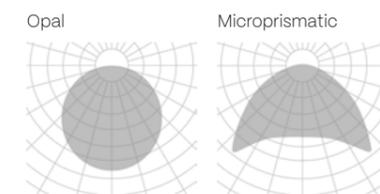

The data shown corresponds to raw values.

FINISH	ON DEMAND OPTIONS			
B · Black	 Special finishes	 Special color temperatures	 Number switches	 Custom dimensions
W · White	 Emergency lighting	 Motion detection	 Wireless control options	 Surface/Wall sfc. up light
S · Special color				


INSTALLATION	FINISH	DIMM OPTIONS	 Up light
1 · Pendant	B · Black	O · On-Off	 Down light
2 · Pendant up light	W · White	D · Dali	
3 · Surface	S · Special color	P · Push	
6 · Trimless		V · 1.10v	

ALBERTA


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- INTEGRATED
- INDOOR
- 220-240 V 50-60 HZ
- CE




INSTALLATION

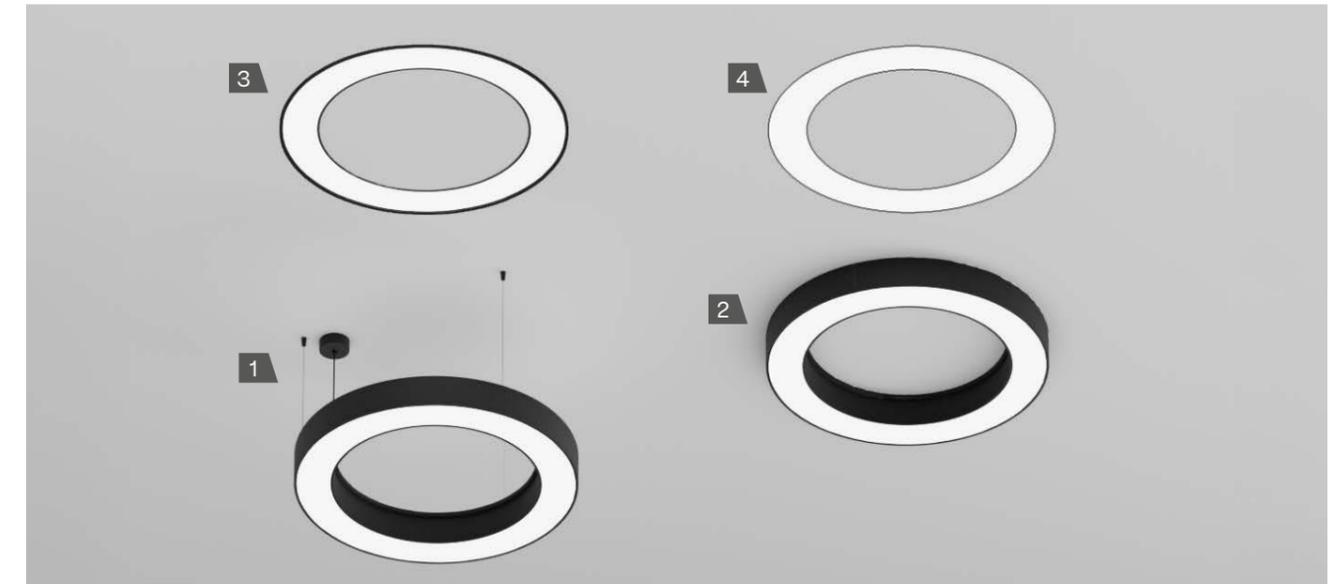


1. PENDANT - PENDANT UP LIGHT

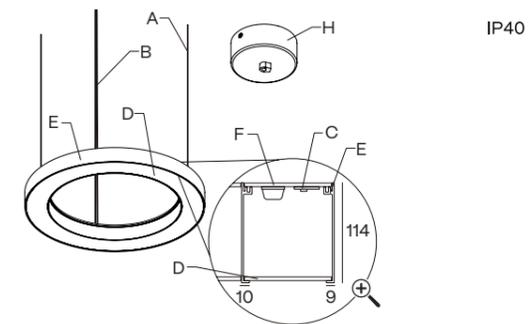


2. SURFACE

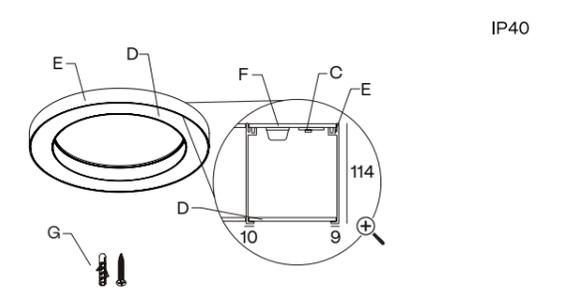

3. RECESSED WITH FRAME

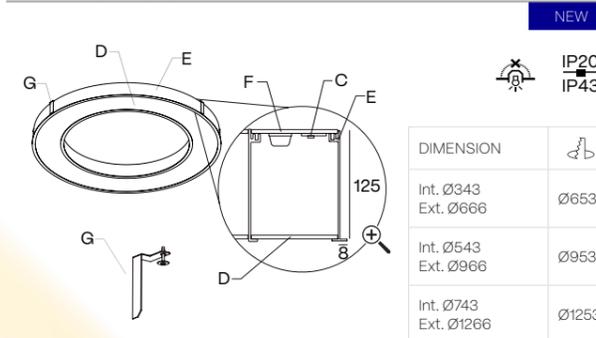

4. TRIMLESS

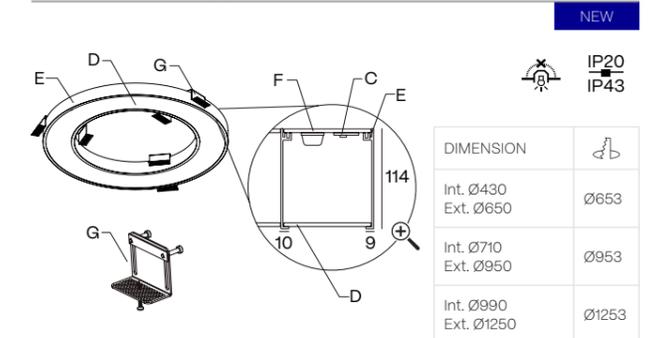

DIAMETERS mm.
420/650 · 690/950 · 990/1250

HEIGHT mm.
114 · 125

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.65	CB02			.65	SC22
		.95 .125	CB05			.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 - Special finishes
 - Special color temperatures
 - Number switches
 - CRI 80
 - Custom dimensions
 - Emergency lighting
 - Motion detection
 - Wireless control options
 - Surface/Wall sfc. up light
 - RGB


TECHNICAL INFORMATION

POWER STANDARD

		Int. Ø420 - Ext. Ø650	Int. Ø690 - Ext. Ø950	Int. Ø990 - Ext. Ø1250
24 V	25 W	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	37 W			48 W
	48 W			3556 - 3721 - 3995 lm
500 mA	24 W	4090 - 4845 - 5215 lm	6544 - 7752 - 8344 lm	9816 - 11628 - 12516 lm
	47 W			48 W
	48 W			9816 - 11628 - 12516 lm
Opal	2700 K	120EF 112	120EI 112	120EK 112
	3000 K	120EF 113	120EI 113	120EK 113
	4000 K	120EF 115	120EI 115	120EK 115
Microprismatic	2700 K	120EF 122	120EI 122	120EK 122
	3000 K	120EF 123	120EI 123	120EK 123
	4000 K	120EF 125	120EI 125	120EK 125

POWER HIGH

		Int. Ø420 - Ext. Ø650	Int. Ø690 - Ext. Ø950	Int. Ø990 - Ext. Ø1250
24 V	25 W	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	37 W			48 W
	48 W			3556 - 3721 - 3995 lm
500 mA	59 W	8430 - 9690 - 10430 lm	13488 - 15504 - 16688 lm	20232 - 23256 - 25032 lm
	94 W			48 W
	48 W			20232 - 23256 - 25032 lm
Opal	2700 K	120EF 312	120EI 312	120EK 312
	3000 K	120EF 313	120EI 313	120EK 313
	4000 K	120EF 315	120EI 315	120EK 315
Microprismatic	2700 K	120EF 322	120EI 322	120EK 322
	3000 K	120EF 323	120EI 323	120EK 323
	4000 K	120EF 325	120EI 325	120EK 325

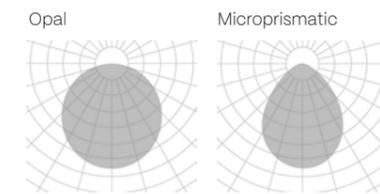

The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Up light
- Down light

FLORIDA FAMILY



FLORIDA | DECO | SQ
REF. 160 | 161 | 162
PAG. 106 | 102 | 110

FLORIDA DECO


NEW



INSTALLATION




1. PENDANT

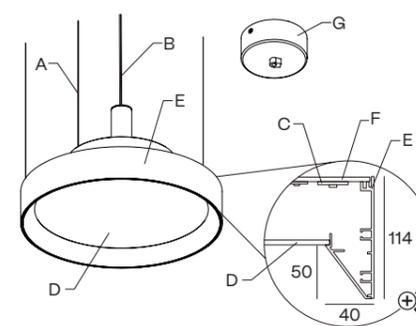

IP40

2. SURFACE

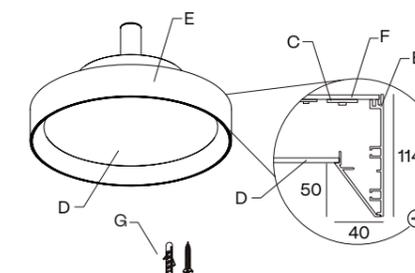

IP40

DIAMETERS mm.

450 · 650

HEIGHT mm.




114




- A - 3x aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser

- E - Aluminium profile
- F - Aluminium cover
- G - Included connection box

COMPONENTS



PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10 		 + 	.35	SC21 
	 26 Ø150	.45 .65	CB02 		 + 	.45 .65	SC22 
	 47 Ø310	.95 .125	CB05 		 + 	.95 .125	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER STANDARD

				
		Ø450	Ø650	
	mA	49 W 4938 - 5185 - 5444 lm	118 W 11851 - 12444 - 13066 lm	
	Opal	2700 K	161ED   112 	161EF   112 
		3000 K	161ED   113 	161EF   113 
4000 K		161ED   115 	161EF   115 	
Microprismatic	2700 K	161ED   122 	161EF   122 	
	3000 K	161ED   123 	161EF   123 	
	4000 K	161ED   125 	161EF   125 	

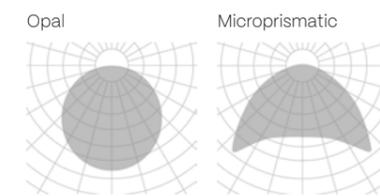

The data shown corresponds to raw values.

FINISH

- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS

-  Special finishes
-  Number switches
-  Surface/Wall sfc. up light
-  Emergency lighting
-  Motion detection
-  Wireless control options

INSTALLATION

- Pendant
- Pendant up light
- Surface

FINISH

- B** · Black
- W** · White
- S** · Special color
- H** · White - special color
- J** · Black - special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Down light

FLORIDA


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

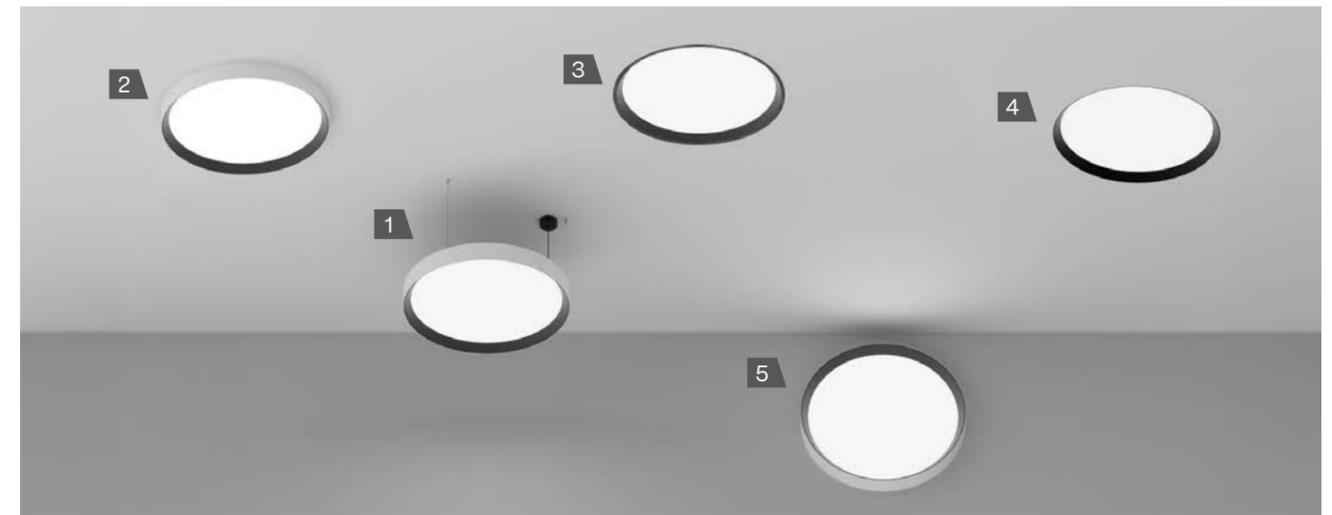


1. PENDANT - PENDANT UP LIGHT

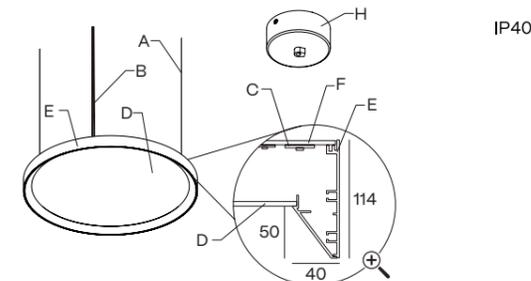


2. SURFACE

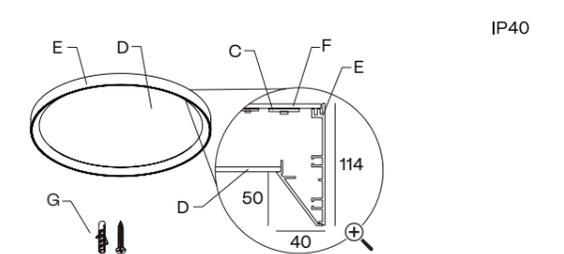


3. RECESSED WITH FRAME

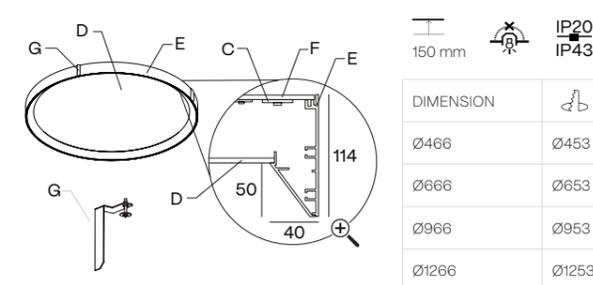

4. TRIMLESS

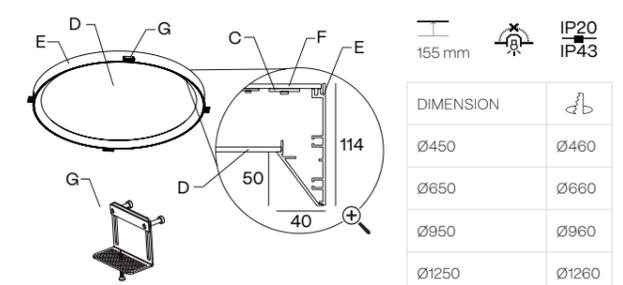

5. WALL SURFACE

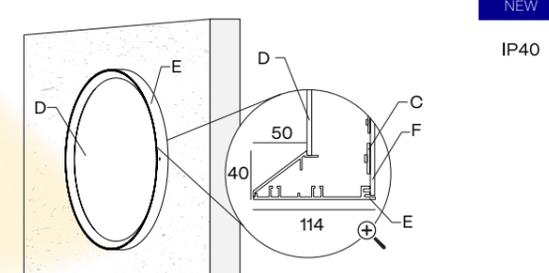

DIAMETERS mm.
450 · 650 · 950 · 1250

HEIGHT mm.
114

- A - 3x aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser

- E - Aluminium profile
- F - Aluminium cover
- G - Mounting kit
- H - Included connection box

- ∅ Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.45 .65	CB02			.45 .65	SC22
		.95 .125	CB05			.95 .125	SC23
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
		600 mm	SC20.60				
		800 mm	SC20.80				
		1000 mm	SC20.100				
				SC05.SA	SC07.SA	SC10.SA	

FINISH
B · Black
W · White
S · Special color


ON DEMAND OPTIONS

- Special finishes
- Number switches
- Surface/Wall sfc. up light
- Emergency lighting
- Motion detection
- Wireless control options

TECHNICAL INFORMATION

POWER STANDARD

		Ø450	Ø650	Ø950	Ø1250
	24 V	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
		49 W 4938 - 5185 - 5444 lm	118 W 11851 - 12444 - 13066 lm	216 W 21728 - 22814 - 23955 lm	353 W 34567 - 36295 - 38110 lm
Opal	2700 K	160ED 112	160EF 112	160EI 112	160EK 112
	3000 K	160ED 113	160EF 113	160EI 113	160EK 113
	4000 K	160ED 115	160EF 115	160EI 115	160EK 115
Microprismatic	2700 K	160ED 122	160EF 122	160EI 122	160EK 122
	3000 K	160ED 123	160EF 123	160EI 123	160EK 123
	4000 K	160ED 125	160EF 125	160EI 125	160EK 125

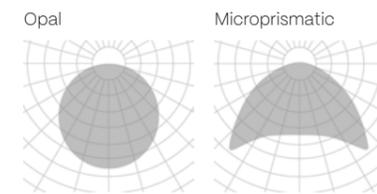

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 7 · Wall Surface

FINISH

- B** · Black
- W** · White
- S** · Special color
- H** · White - special color
- J** · Black - special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


- Up light
- Down light

FLORIDA SQ


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

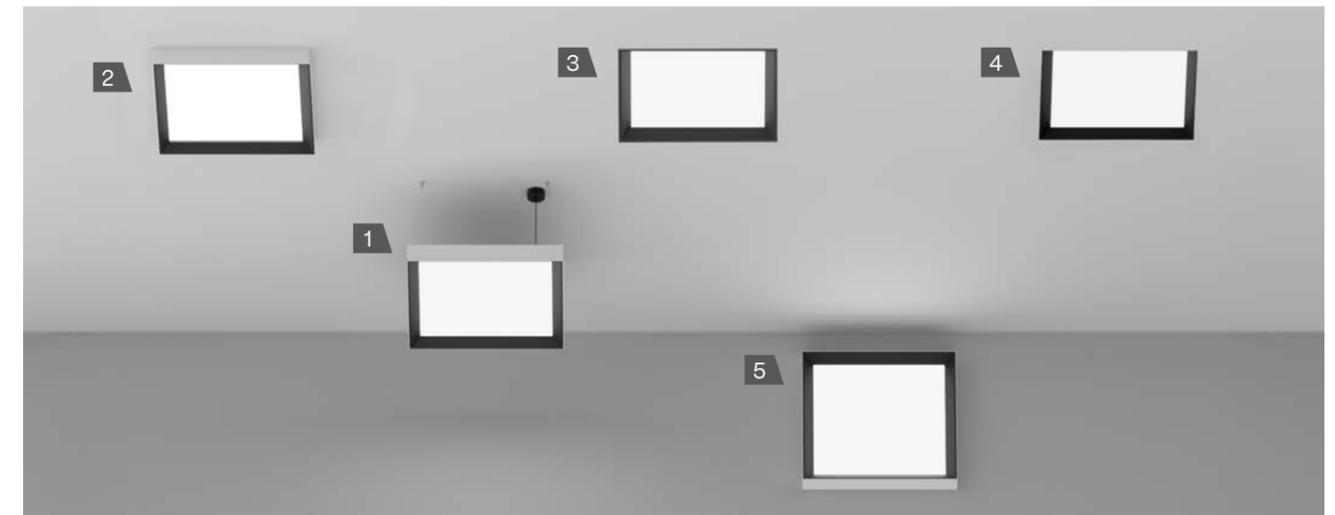


1. PENDANT - PENDANT UP LIGHT

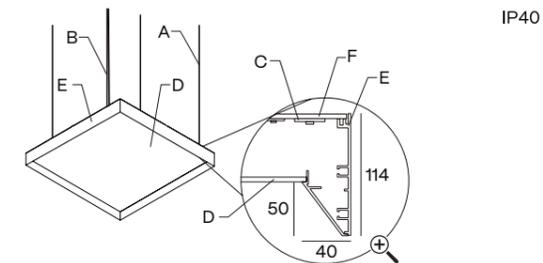


2. SURFACE

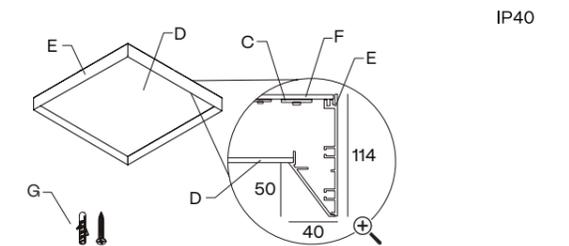


3. RECESSED WITH FRAME

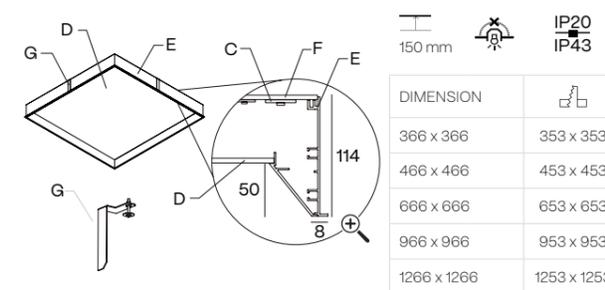

4. TRIMLESS

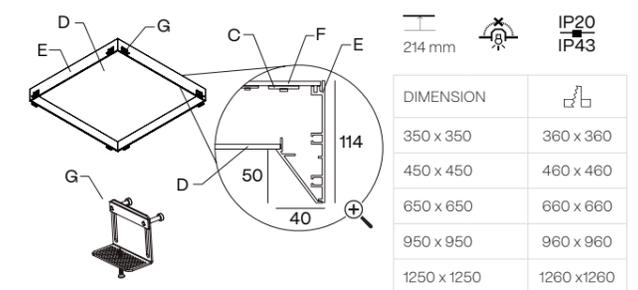

5. WALL SURFACE

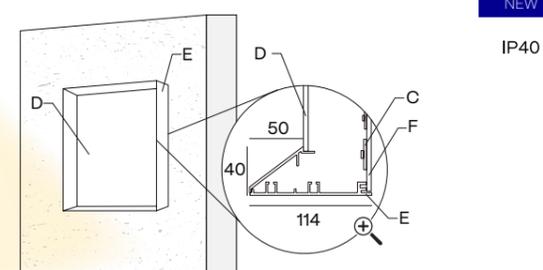

WIDTH x LENGTH mm.
350 x 350 · 450 x 450 · 650 x 650
950 x 950 · 1250 x 1250

HEIGHT mm.
114

- A - 4x aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser

- E - Aluminium profile
- F - Aluminium cover
- G - Mounting kit
- H - Included connection box

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CONNECTION BOX	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
<p>45 120 30</p>	<p>5m</p>	<p>7m</p>	<p>10m</p>
CB09.12	SC05.SA	SC07.SA	SC10.SA


TECHNICAL INFORMATION

POWER STANDARD

		350 x 350	450 x 450	650 x 650	950 x 950	1250 x 1250
24 V		13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
		29 W 2963 - 3111 - 3267 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
Opal	2700 K	162EC 112	162ED 112	162EF 112	162EI 112	162EK 112
	3000 K	162EC 113	162ED 113	162EF 113	162EI 113	162EK 113
	4000 K	162EC 115	162ED 115	162EF 115	162EI 115	162EK 115
Microprismatic	2700 K	162EC 122	162ED 122	162EF 122	162EI 122	162EK 122
	3000 K	162EC 123	162ED 123	162EF 123	162EI 123	162EK 123
	4000 K	162EC 125	162ED 125	162EF 125	162EI 125	162EK 125

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- ON DEMAND OPTIONS**
- Special finishes
 - Number switches
 - Surface/Wall sfc. up light
 - Emergency lighting
 - Motion detection
 - Wireless control options

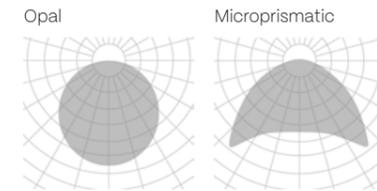


The data shown corresponds to raw values.


- INSTALLATION**
- Pendant
 - Pendant up light
 - Surface
 - Recessed with frame
 - Trimless
 - Wall Surface
- FINISH**
- B** · Black
 - W** · White
 - S** · Special color
 - H** · White - special color
 - J** · Black - special color
- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Up light
- Down light


ALABAMA FAMILY

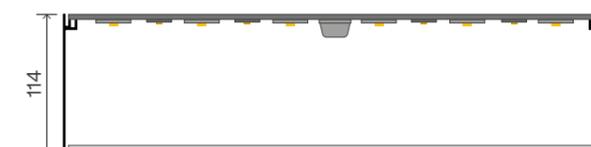

ALABAMA | LOOP | STONE
REF. 100 | 101 | 105
PAG. 124 | 120 | 116

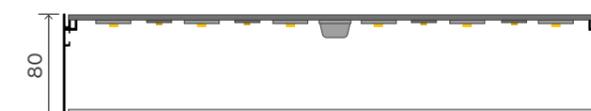

ALABAMA SLIGHT | SQ
REF. 102 | 103
PAG. 128 | 132

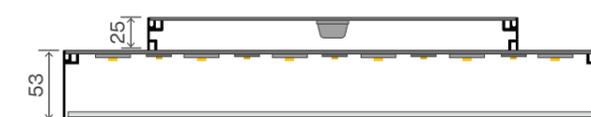


ALABAMA SLIM
REF. 104
PAG. 136



ALABAMA SUPER SLIM
REF. 106
PAG. 140

ALABAMA STONE


NEW

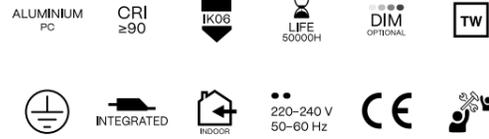

INSTALLATION




1. PENDANT

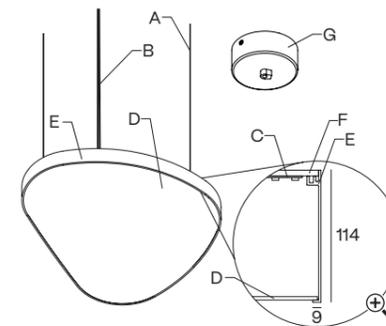

IP40

2. SURFACE

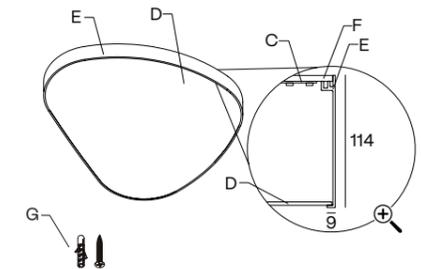

IP40

WIDTH x LENGTH mm.

1315 x 1100

HEIGHT mm.

114

A - 3x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser









E - Aluminium profile

F - Aluminium cover

G - Included connection box

COMPONENTS

PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10 		 + 	.35	SC21 
	 26 Ø150	.45 .65	CB02 		 + 	.45 .65	SC22 
	 47 Ø310	.95 .125	CB05 		 + 	.95 .125	SC23 
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
	 40 Ø102	600 mm	SC20.60 	 5m SC05.SA	 7m SC07.SA	 10m SC10.SA	
		800 mm	SC20.80 				
		1000 mm	SC20.100 				

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 -  Special finishes
 -  Special color temperatures
 -  CRI 80
 -  RGB
 -  Emergency lighting
 -  Motion detection
 -  Wireless control options
 -  Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD

	500 mA	29 W 58960 - 67830 - 73010 lm	
Opal	2700 K	105EB   112 	
	3000 K	105EB   113 	
	4000 K	105EB   115 	
Microprismatic	2700 K	105EB   122 	
	3000 K	105EB   123 	
	4000 K	105EB   125 	

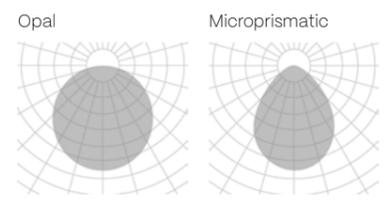


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
-  Down light

ALABAMA LOOP


NEW

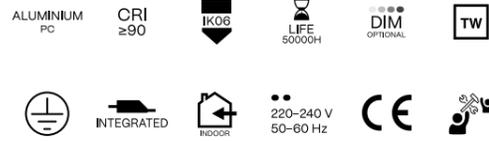

INSTALLATION




1. PENDANT

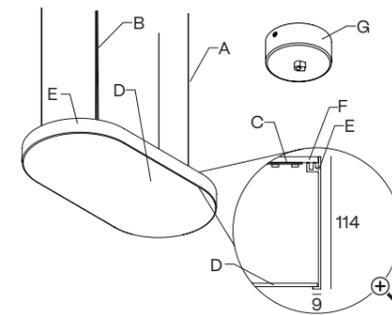

IP40

2. SURFACE

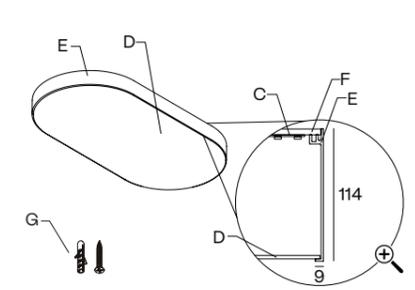

IP40

WIDTH x LENGTH mm.
700 x 350 · 900 x 450 · 1300 x 650

HEIGHT mm.
114

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Included connection box

COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
		600 mm	SC20.60
		800 mm	SC20.80
		1000 mm	SC20.100


TECHNICAL INFORMATION

POWER STANDARD

		700 x 350	900 x 450	1300 x 650
Opal	500 mA	45 W 6544 - 7752 - 8344 lm	61 W 8998 - 10659 - 11473 lm	145 W 21268 - 25194 - 27118 lm
	2700 K	101EC 112	101ED 112	101EF 112
	3000 K	101EC 113	101ED 113	101EF 113
Microprismatic	4000 K	101EC 115	101ED 115	101EF 115
	2700 K	101EC 122	101ED 122	101EF 122
	3000 K	101EC 123	101ED 123	101EF 123
	4000 K	101EC 125	101ED 125	101EF 125

POWER HIGH

		700 x 350	900 x 450	1300 x 650
Opal	500 mA	89 W 13488 - 15504 - 16688 lm	123 W 18496 - 21318 - 22946 lm	290 W 43836 - 50388 - 54236 lm
	2700 K	101EC 312	101ED 312	101EF 312
	3000 K	101EC 313	101ED 313	101EF 313
Microprismatic	4000 K	101EC 315	101ED 315	101EF 315
	2700 K	101EC 322	101ED 322	101EF 322
	3000 K	101EC 323	101ED 323	101EF 323
	4000 K	101EC 325	101ED 325	101EF 325

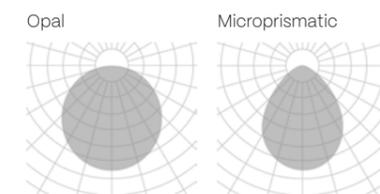

The data shown corresponds to raw values.

FINISH

- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- CRI 80
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

INSTALLATION

- 1** · Pendant
- 3** · Surface

FINISH



- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 110v

Down light


ALABAMA

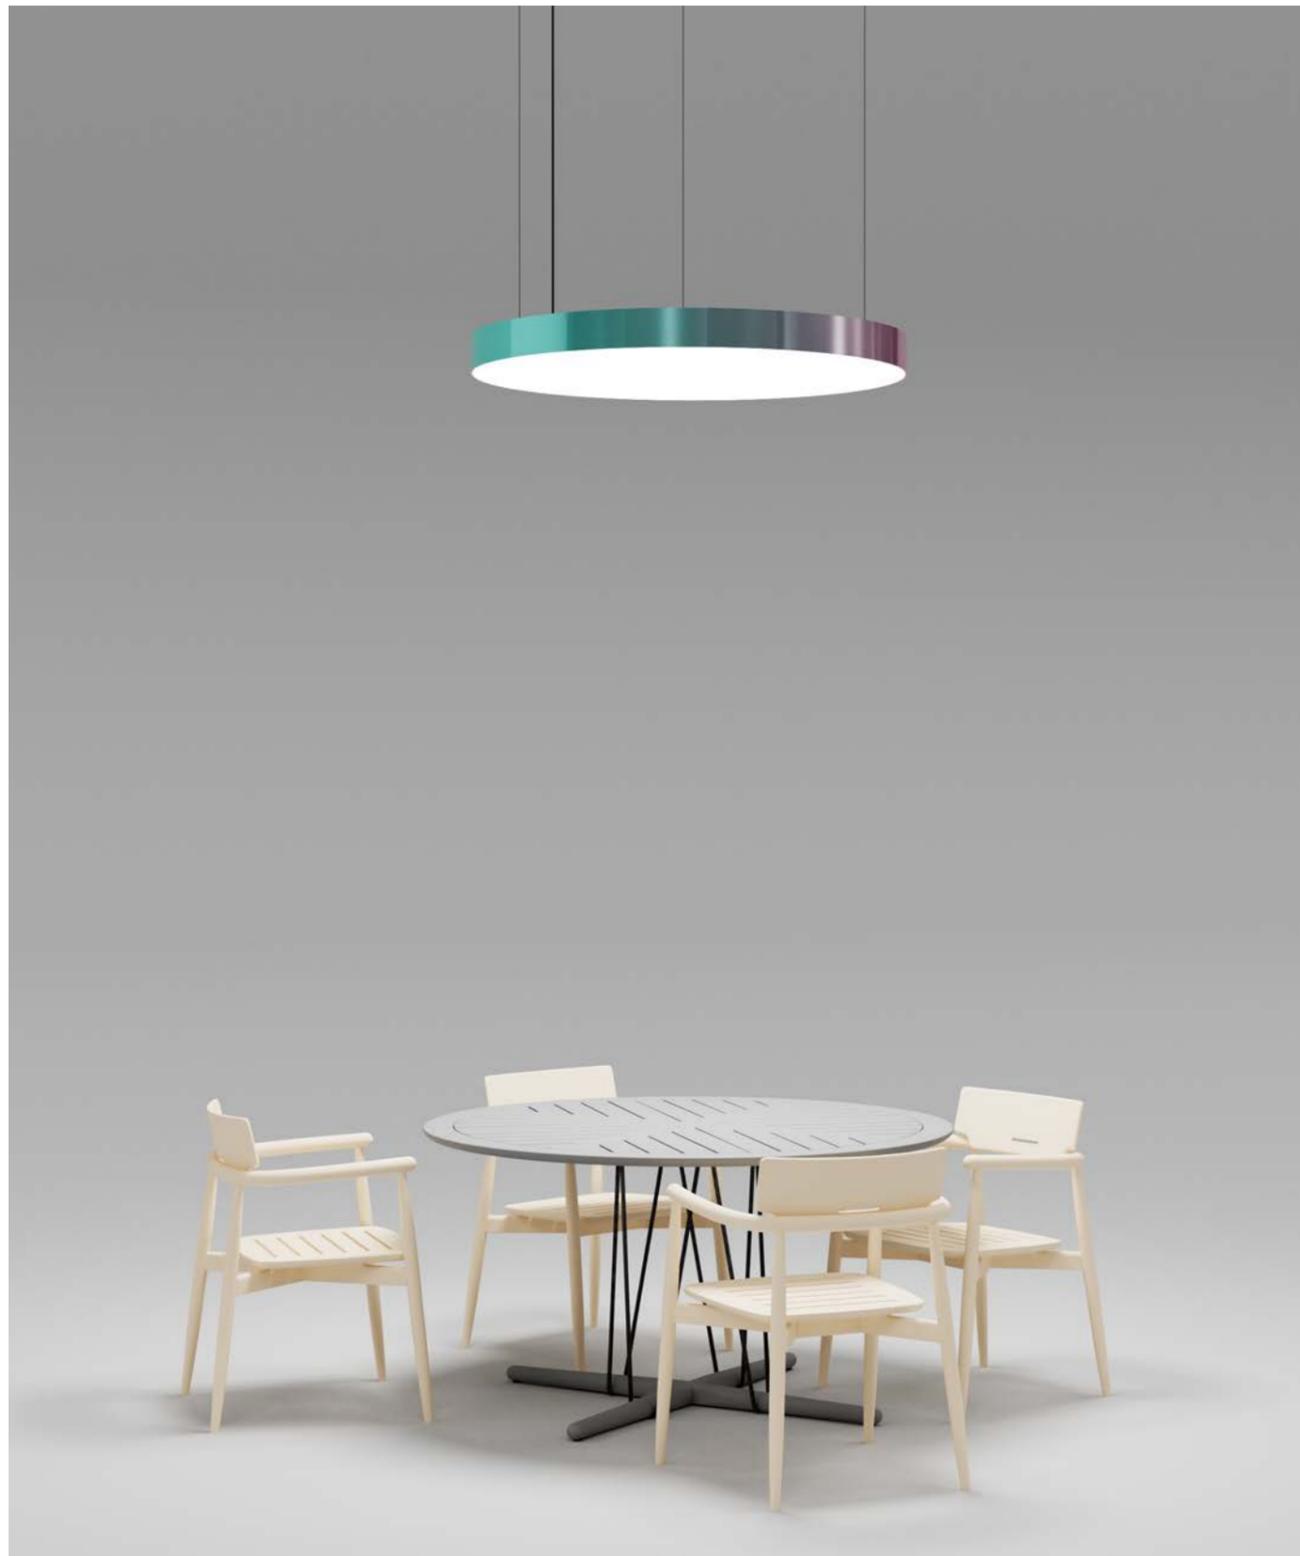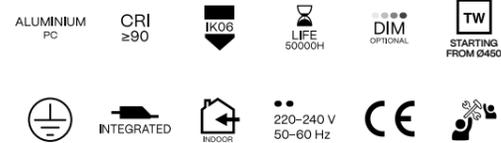


INSTALLATION

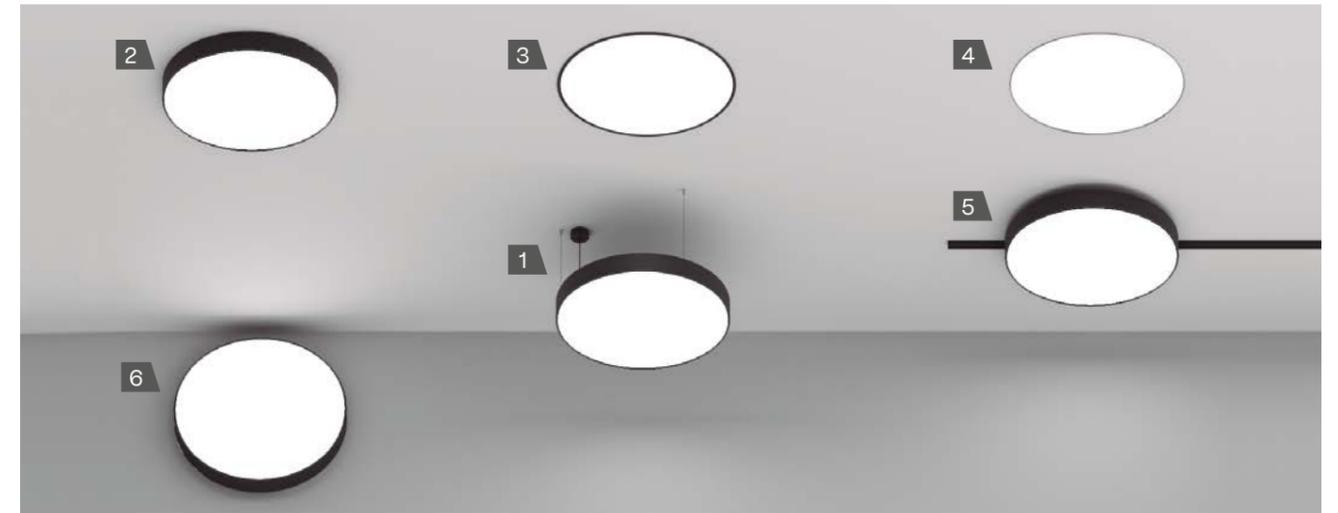


1. PENDANT - PENDANT UP LIGHT

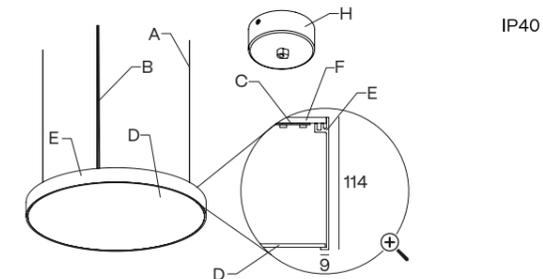


2. SURFACE

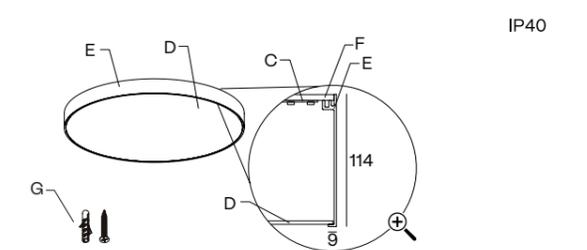


3. RECESSED WITH FRAME

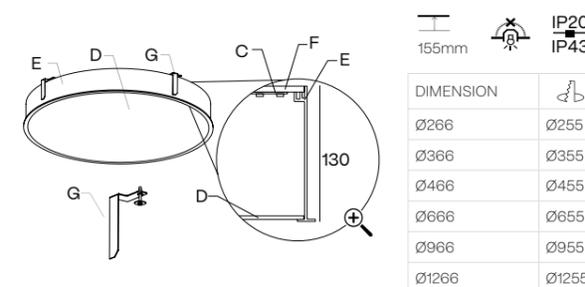


4. TRIMLESS

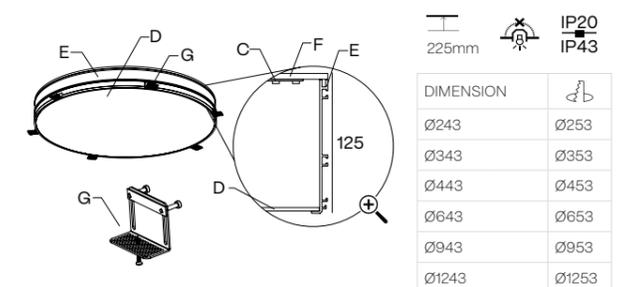

5. TRACKLIGHT Ø250 mm to Ø650 mm

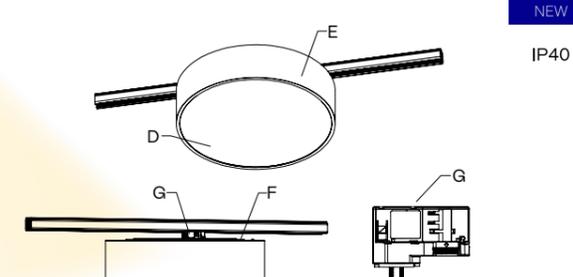

6. WALL SURFACE Ø250 mm and Ø1250 mm only

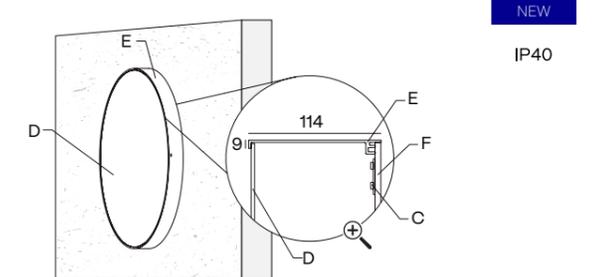

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.
114 · 125

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.35	CB10			.35	SC21
		.45 .65	CB02			.45 .65	SC22
		.95 .125	CB05			.95 .125	SC23
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
		600 mm	SC20.60				
		800 mm	SC20.80				
		1000 mm	SC20.100				
				SC05.SA	SC07.SA	SC10.SA	

Luminaire .95 and .125 require 3 rod suspensions.


TECHNICAL INFORMATION

POWER STANDARD

		Ø250	Ø350	Ø450	Ø650	Ø950	Ø1250
24V		-	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	500 mA	8 W 1227 - 1454 - 1565 lm	17 W 2454 - 2907 - 3129 lm	33 W 4908 - 5814 - 6258 lm	67 W 9816 - 11628 - 12516 lm	123 W 17966 - 21318 - 22946 lm	201 W 29448 - 34884 - 37548 lm
Opal	2700 K	100EB ✖ ✖ ✖ 112 ✖	100EC ✖ ✖ ✖ 112 ✖	100ED ✖ ✖ ✖ 112 ✖	100EF ✖ ✖ ✖ 112 ✖	100EI ✖ ✖ ✖ 112 ✖	100EK ✖ ✖ ✖ 112 ✖
	3000 K	100EB ✖ ✖ ✖ 113 ✖	100EC ✖ ✖ ✖ 113 ✖	100ED ✖ ✖ ✖ 113 ✖	100EF ✖ ✖ ✖ 113 ✖	100EI ✖ ✖ ✖ 113 ✖	100EK ✖ ✖ ✖ 113 ✖
	4000 K	100EB ✖ ✖ ✖ 115 ✖	100EC ✖ ✖ ✖ 115 ✖	100ED ✖ ✖ ✖ 115 ✖	100EF ✖ ✖ ✖ 115 ✖	100EI ✖ ✖ ✖ 115 ✖	100EK ✖ ✖ ✖ 115 ✖
Microprismatic	2700 K	100EB ✖ ✖ ✖ 122 ✖	100EC ✖ ✖ ✖ 122 ✖	100ED ✖ ✖ ✖ 122 ✖	100EF ✖ ✖ ✖ 122 ✖	100EI ✖ ✖ ✖ 122 ✖	100EK ✖ ✖ ✖ 122 ✖
	3000 K	100EB ✖ ✖ ✖ 123 ✖	100EC ✖ ✖ ✖ 123 ✖	100ED ✖ ✖ ✖ 123 ✖	100EF ✖ ✖ ✖ 123 ✖	100EI ✖ ✖ ✖ 123 ✖	100EK ✖ ✖ ✖ 123 ✖
	4000 K	100EB ✖ ✖ ✖ 125 ✖	100EC ✖ ✖ ✖ 125 ✖	100ED ✖ ✖ ✖ 125 ✖	100EF ✖ ✖ ✖ 125 ✖	100EI ✖ ✖ ✖ 125 ✖	100EK ✖ ✖ ✖ 125 ✖

POWER HIGH

		Ø250	Ø350	Ø450	Ø650	Ø950	Ø1250
24V		-	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	500 mA	17 W 2454 - 2907 - 3129 lm	33 W 5008 - 5814 - 6258 lm	67 W 10116 - 11628 - 12516 lm	134 W 20232 - 23256 - 25032 lm	245 W 37092 - 42636 - 45892 lm	401 W 60966 - 69768 - 75096 lm
Opal	2700 K	100EB ✖ ✖ ✖ 312 ✖	100EC ✖ ✖ ✖ 312 ✖	100ED ✖ ✖ ✖ 312 ✖	100EF ✖ ✖ ✖ 312 ✖	100EI ✖ ✖ ✖ 312 ✖	100EK ✖ ✖ ✖ 312 ✖
	3000 K	100EB ✖ ✖ ✖ 313 ✖	100EC ✖ ✖ ✖ 313 ✖	100ED ✖ ✖ ✖ 313 ✖	100EF ✖ ✖ ✖ 313 ✖	100EI ✖ ✖ ✖ 313 ✖	100EK ✖ ✖ ✖ 313 ✖
	4000 K	100EB ✖ ✖ ✖ 315 ✖	100EC ✖ ✖ ✖ 315 ✖	100ED ✖ ✖ ✖ 315 ✖	100EF ✖ ✖ ✖ 315 ✖	100EI ✖ ✖ ✖ 315 ✖	100EK ✖ ✖ ✖ 315 ✖
Microprismatic	2700 K	100EB ✖ ✖ ✖ 322 ✖	100EC ✖ ✖ ✖ 322 ✖	100ED ✖ ✖ ✖ 322 ✖	100EF ✖ ✖ ✖ 322 ✖	100EI ✖ ✖ ✖ 322 ✖	100EK ✖ ✖ ✖ 322 ✖
	3000 K	100EB ✖ ✖ ✖ 323 ✖	100EC ✖ ✖ ✖ 323 ✖	100ED ✖ ✖ ✖ 323 ✖	100EF ✖ ✖ ✖ 323 ✖	100EI ✖ ✖ ✖ 323 ✖	100EK ✖ ✖ ✖ 323 ✖
	4000 K	100EB ✖ ✖ ✖ 325 ✖	100EC ✖ ✖ ✖ 325 ✖	100ED ✖ ✖ ✖ 325 ✖	100EF ✖ ✖ ✖ 325 ✖	100EI ✖ ✖ ✖ 325 ✖	100EK ✖ ✖ ✖ 325 ✖

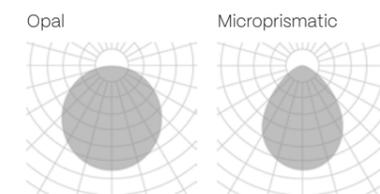

The data shown corresponds to raw values.

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- Number switches
- CRI 80
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light
- RGB

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed
- 6 · Trimless
- 7 · Wall Surface
- 9 · Trackline

FINISH
B · Black
W · White
S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


Up light
Down light

ALABAMA SLIGHT


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

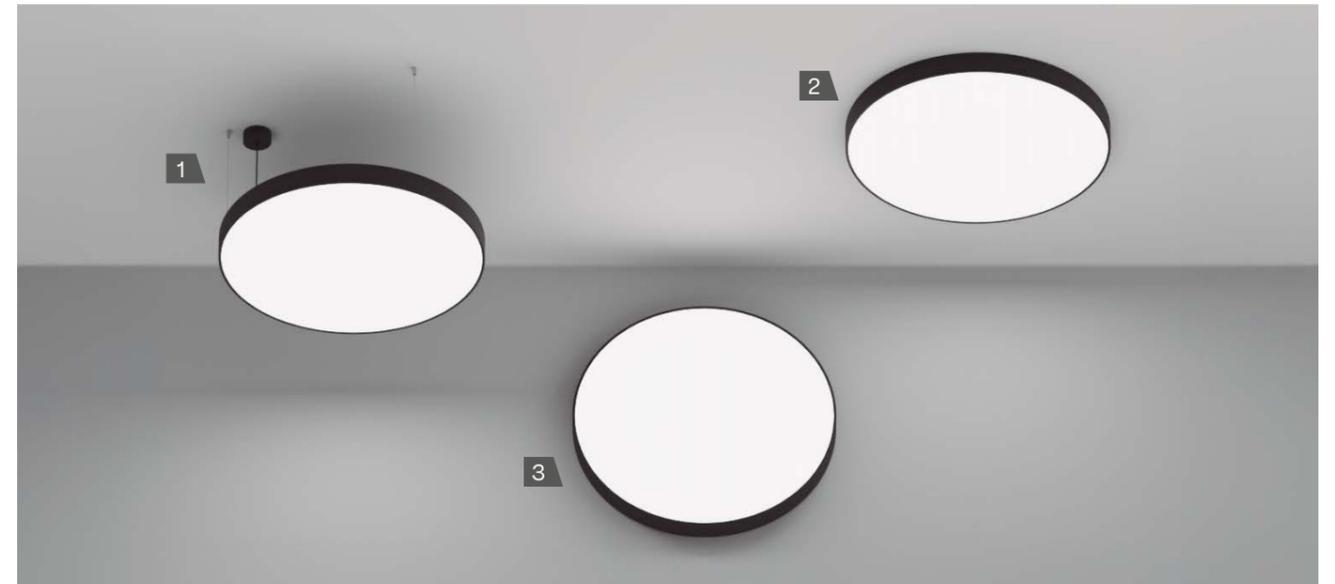


1. PENDANT - PENDANT UP LIGHT

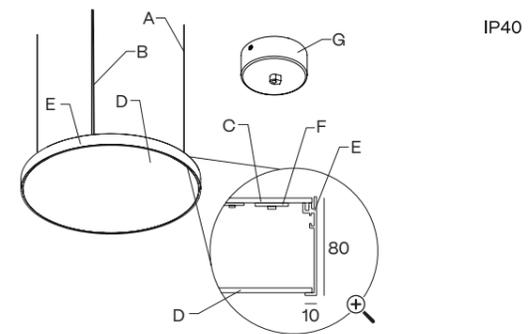

2. SURFACE

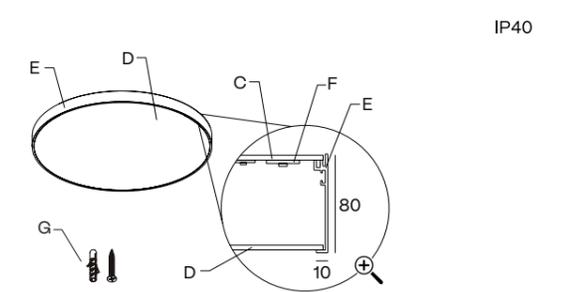

3. WALL SURFACE

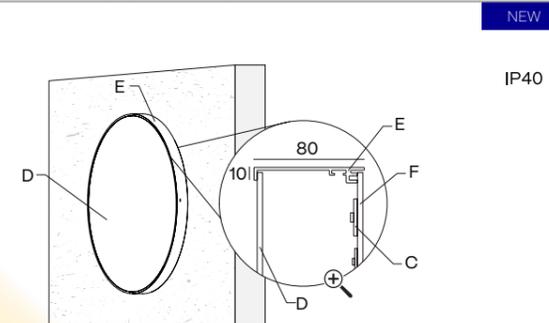

DIAMETERS mm.
350 · 450 · 650 · 950 · 1250

HEIGHT mm.
80

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Included connection box

COMPONENTS

PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.35	CB10			.35	SC21
		.45 .65	CB02			.45 .65	SC22
		.95 .125	CB05			.95 .125	SC23
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
		600 mm	SC20.60				
		800 mm	SC20.80				SC05.SA
		1000 mm	SC20.100				SC07.SA

Luminaire .95 and .125 require 3 rod suspensions.

TECHNICAL INFORMATION

POWER STANDARD

		Ø350	Ø450	Ø650	Ø950	Ø1250
24 V	13 W	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	29 W	2963 - 3111 - 3267 lm	4938 - 5185 - 5444 lm	11851 - 12444 - 13066 lm	21728 - 22814 - 23955 lm	34567 - 36295 - 38110 lm
Opal	2700 K	102EC 112	102ED 112	102EF 112	102EI 112	102EK 112
	3000 K	102EC 113	102ED 113	102EF 113	102EI 113	102EK 113
	4000 K	102EC 115	102ED 115	102EF 115	102EI 115	102EK 115
Microprismatic	2700 K	102EC 122	102ED 122	102EF 122	102EI 122	102EK 122
	3000 K	102EC 123	102ED 123	102EF 123	102EI 123	102EK 123
	4000 K	102EC 125	102ED 125	102EF 125	102EI 125	102EK 125

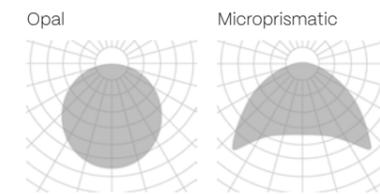

The data shown corresponds to raw values.


- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 - Special finishes
 - Emergency lighting
 - Number switches
 - Motion detection
 - Surface/Wall sfc. up light
 - Wireless control options

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 7 · Wall Surface
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Up light
- Down light


ALABAMA SLIGHT SQ




INSTALLATION

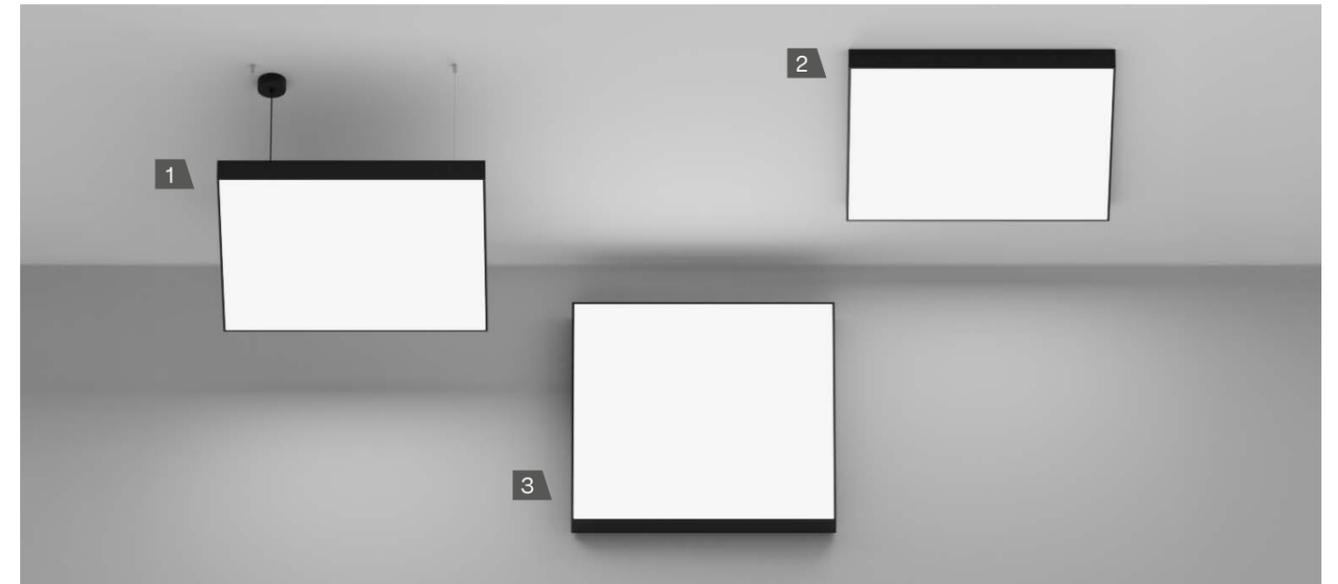


1. PENDANT - PENDANT UP LIGHT

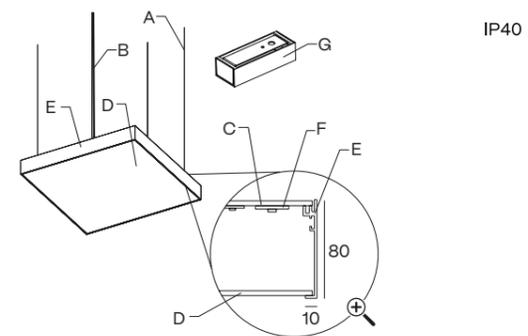

3. WALL SURFACE

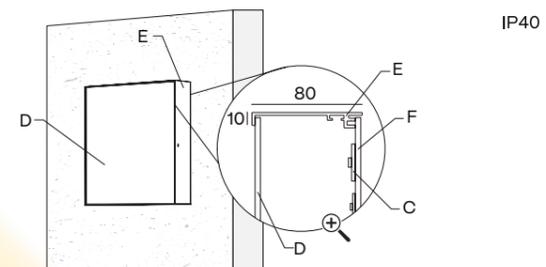

2. SURFACE

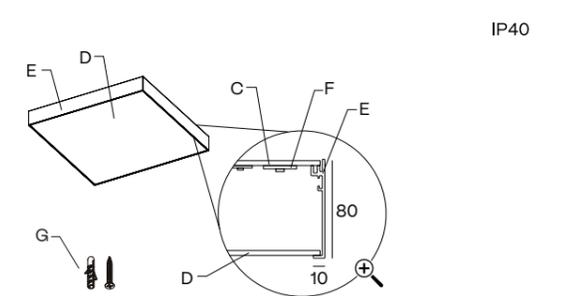

WIDTH x LENGTH mm.
 350 x 350 · 450 x 450 · 650 x 650
 950 x 950 · 1250 x 1250
 300 x 650 · 300 x 950 · 300x1250

HEIGHT mm.
 80

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Included connection box

COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC21.60			
		800 mm	SC21.80			
		1000 mm	SC21.100			


Luminaire .95 and .125 require 3 rod suspensions.

TECHNICAL INFORMATION

POWER STANDARD

	24 V	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	700 mA	29 W 2706 - 3111 - 3267 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
Opal	2700 K	103EC 112	103ED 112	103EF 112	103EI 112	103EK 112
	3000 K	103EC 113	103ED 113	103EF 113	103EI 113	103EK 113
	4000 K	103EC 115	103ED 115	103EF 115	103EI 115	103EK 115
Microprismatic	2700 K	103EC 122	103ED 122	103EF 122	103EI 122	103EK 122
	3000 K	103EC 123	103ED 123	103EF 123	103EI 123	103EK 123
	4000 K	103EC 125	103ED 125	103EF 125	103EI 125	103EK 125

	24 V	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 2142 lm	48 W 3556 - 3721 - 3995 lm
	700 mA	39 W 3950 - 4148 - 4355 lm	59 W 5926 - 6222 - 6533 lm	78 W 7901 - 8296 - 8711 lm
Opal	2700 K	103EE 112	103EH 112	103EJ 112
	3000 K	103EE 113	103EH 113	103EJ 113
	4000 K	103EE 115	103EH 115	103EJ 115
Microprismatic	2700 K	103EE 122	103EH 122	103EJ 122
	3000 K	103EE 123	103EH 123	103EJ 123
	4000 K	103EE 125	103EH 125	103EJ 125

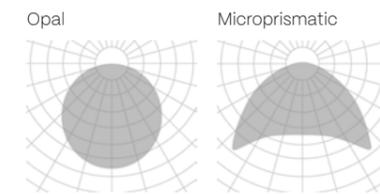

The data shown corresponds to raw values.

FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- Number switches
- Emergency lighting
- Motion detection
- Wireless control options
- Surface/Wall sfc. up light

INSTALLATION

- 1** · Pendant
- 2** · Pendant up light
- 3** · Surface
- 7** · Wall Surface

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Up light
 Down light

ALABAMA SLIM


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

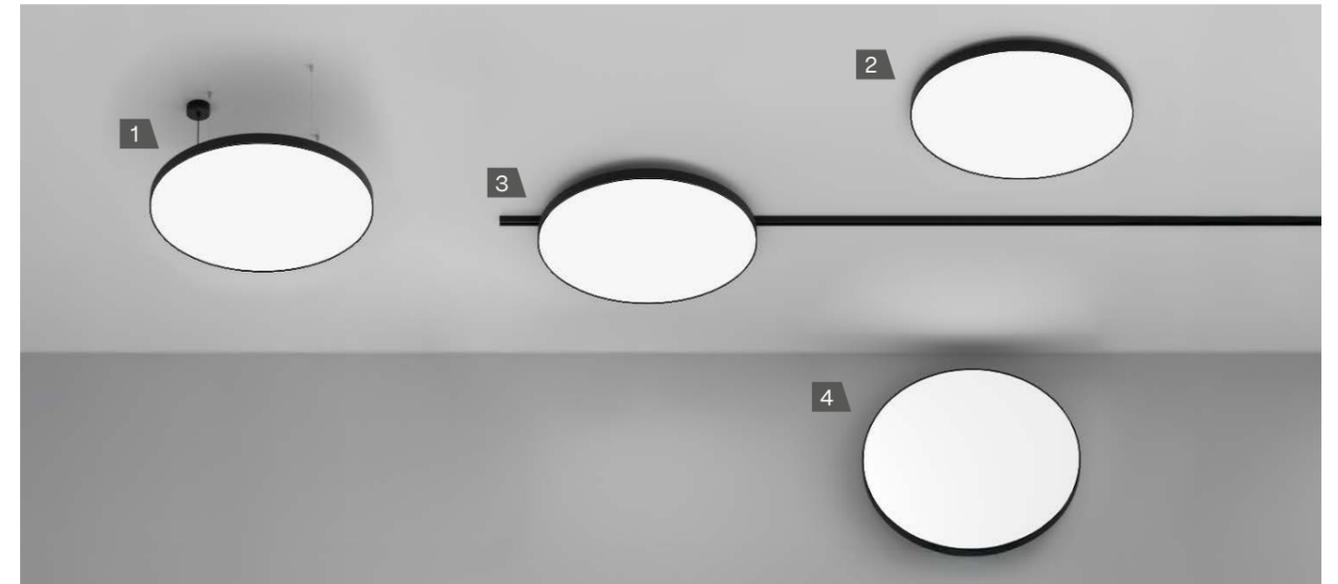


1. PENDANT - PENDANT UP LIGHT

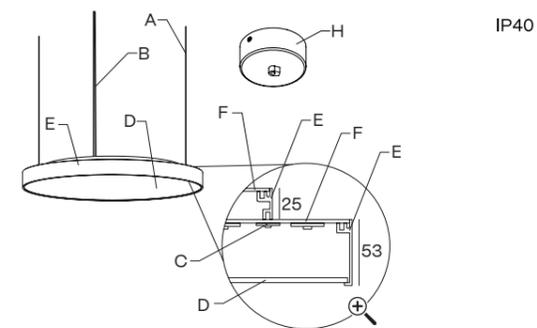


2. SURFACE

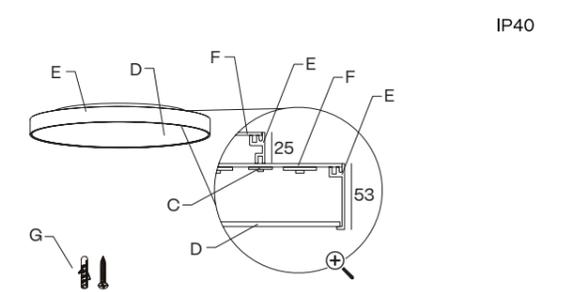

3. TRACKLIGHT $\varnothing 250$ mm to $\varnothing 650$ mm

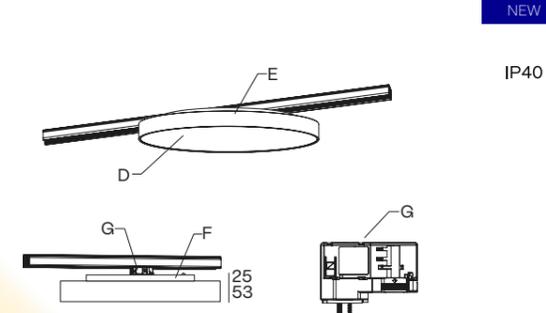

4. WALL SURFACE $\varnothing 250$ mm to $\varnothing 650$ mm

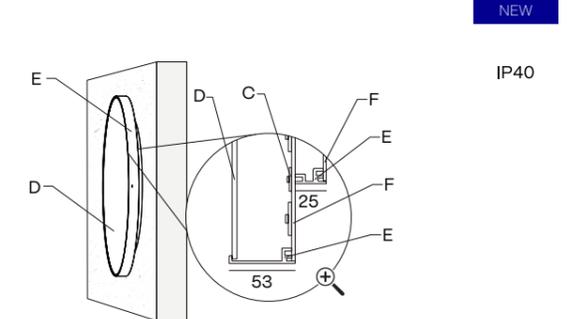

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.
53 + 25

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

COMPONENTS

PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.25 .35	CB10			.25 .35	SC21
		.45 .65	CB02			.45 .65	SC22
		.95 .125	CB05			.95 .125	SC23
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
		600 mm	SC20.60				SC05.SA
		800 mm	SC20.80				
		1000 mm	SC20.100				

TECHNICAL INFORMATION

POWER STANDARD

		Ø250	Ø350	Ø450
24 V	10 W	681 - 713 - 765 lm	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm
	12 W	1385 - 1400 - 1425 lm	2350 - 2392 - 2697 lm	4700 - 4784 - 5394 lm
	13 W			
Opal	2700 K	104EB 112	104EC 112	104ED 112
	3000 K	104EB 113	104EC 113	104ED 113
	4000 K	104EB 115	104EC 115	104ED 115
Microprismatic	2700 K	104EB 122	104EC 122	104ED 122
	3000 K	104EB 123	104EC 123	104ED 123
	4000 K	104EB 125	104EC 125	104ED 125

		Ø650	Ø950	Ø1250
24 V	25 W	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	87 W	10572 - 10704 - 12484 lm	21598 - 21976 - 25816 lm	36308 - 36848 - 43124 lm
	37 W			
Opal	2700 K	104EF 112	104EI 112	104EK 112
	3000 K	104EF 113	104EI 113	104EK 113
	4000 K	104EF 115	104EI 115	104EK 115
Microprismatic	2700 K	104EF 122	104EI 122	104EK 122
	3000 K	104EF 123	104EI 123	104EK 123
	4000 K	104EF 125	104EI 125	104EK 125

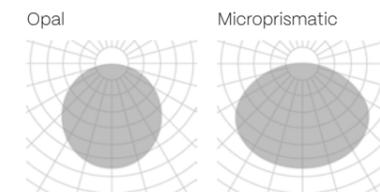

The data shown corresponds to raw values.

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 - Special finishes
 - Emergency lighting
 - Number switches
 - Motion detection
 - Surface/Wall sfc. up light
 - Wireless control options


- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 7 · Wall Surface
 - 9 · Trackline
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Up light
- Down light

ALABAMA SUPER SLIM


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

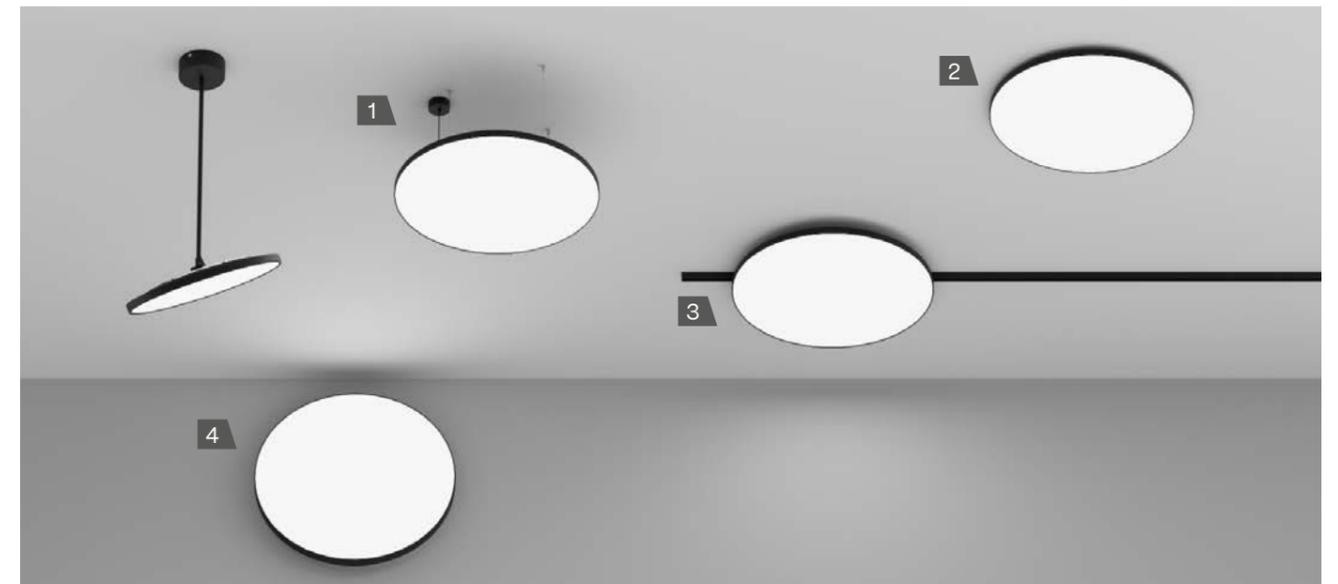


1. PENDANT - PENDANT UP LIGHT

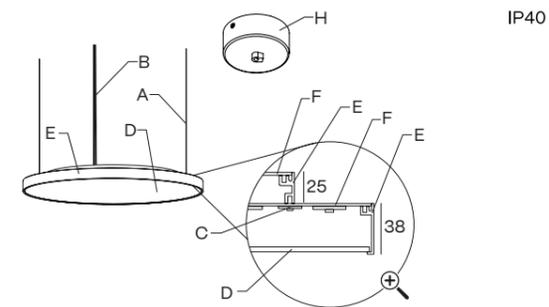


2. SURFACE

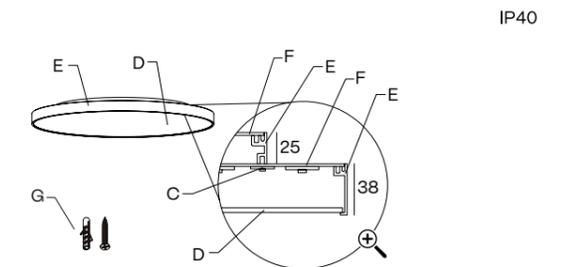

3. TRACKLIGHT

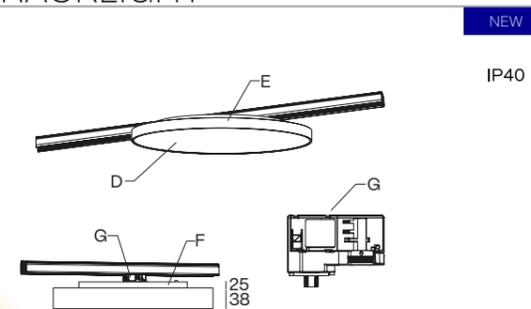

4. WALL SURFACE

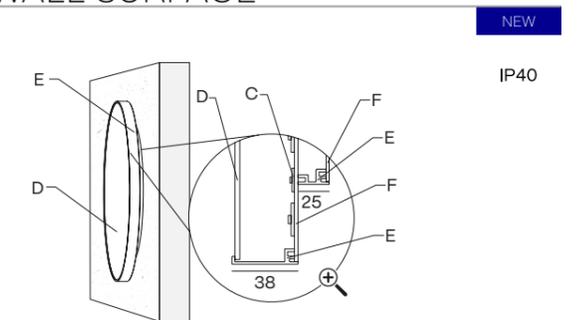

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.
38 + 25

- A - 3x aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser

- E - Aluminium profile
- F - Aluminium cover
- G - Mounting kit
- H - Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE		
		.25 .35	CB10			.25 .35	SC21		
		.45 .65	CB02			.45 .65	SC22		
		.95 .125	CB05			.95 .125	SC23		
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m			
		600 mm	SC20.60						
		800 mm	SC20.80				SC05.SA	SC07.SA	SC10.SA
		1000 mm	SC20.100						

Luminaire .95 and .125 require 3 rod suspensions.

TILT ACCESSORY

ALABAMA SUPER SLIM TILT ROD	CONNECTION BOX	DIMENSION	REFERENCE	EXTRA ALABAMA SUPER SLIM TILT ROD	DIMENSION	REFERENCE
		.35	A106HB1XXX		800 mm	SC20.80
		.45	A122HE1XXX		1000 mm	SC20.100

- FINISH**
- B · Black
 - W · White
 - S · Special color

ON DEMAND OPTIONS


- Special finishes
- Number switches
- Surface/Wall sfc. up light
- Emergency lighting
- Motion detection
- Wireless control options

TECHNICAL INFORMATION

POWER STANDARD

		Ø250	Ø350	Ø450
24 V	10 W	681 - 713 - 765 lm	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm
	12 W	1385 - 1400 - 1425 lm	2350 - 2392 - 2697 lm	4700 - 4784 - 5394 lm
	18 W			
250 mA	12 W	1385 - 1400 - 1425 lm	2350 - 2392 - 2697 lm	4700 - 4784 - 5394 lm
	19 W			
	38 W			
Opal	2700 K	106EB 112	106EC 112	106ED 112
	3000 K	106EB 113	106EC 113	106ED 113
	4000 K	106EB 115	106EC 115	106ED 115
Microprismatic	2700 K	106EB 122	106EC 122	106ED 122
	3000 K	106EB 123	106EC 123	106ED 123
	4000 K	106EB 125	106EC 125	106ED 125

		Ø650	Ø950	Ø1250
24 V	25 W	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	87 W	10572 - 10704 - 12484 lm	21598 - 21976 - 25816 lm	36308 - 36848 - 43124 lm
	48 W			
250 mA	87 W	10572 - 10704 - 12484 lm	21598 - 21976 - 25816 lm	36308 - 36848 - 43124 lm
	177 W			
	350 W			
Opal	2700 K	106EF 112	106EI 112	106EK 112
	3000 K	106EF 113	106EI 113	106EK 113
	4000 K	106EF 115	106EI 115	106EK 115
Microprismatic	2700 K	106EF 122	106EI 122	106EK 122
	3000 K	106EF 123	106EI 123	106EK 123
	4000 K	106EF 125	106EI 125	106EK 125

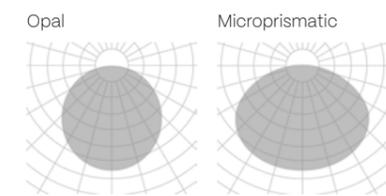

The data shown corresponds to raw values.

INSTALLATION

- Pendant
- Pendant up light
- Surface
- Wall Surface
- Trackline

FINISH


- B · Black
- W · White
- S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push

- Up light
- Down light

OHIO FAMILY

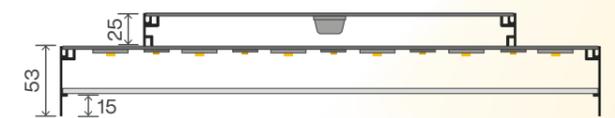


OHIO | SQ
REF. 170 | 171
PAG. 146 | 150

OHIO


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

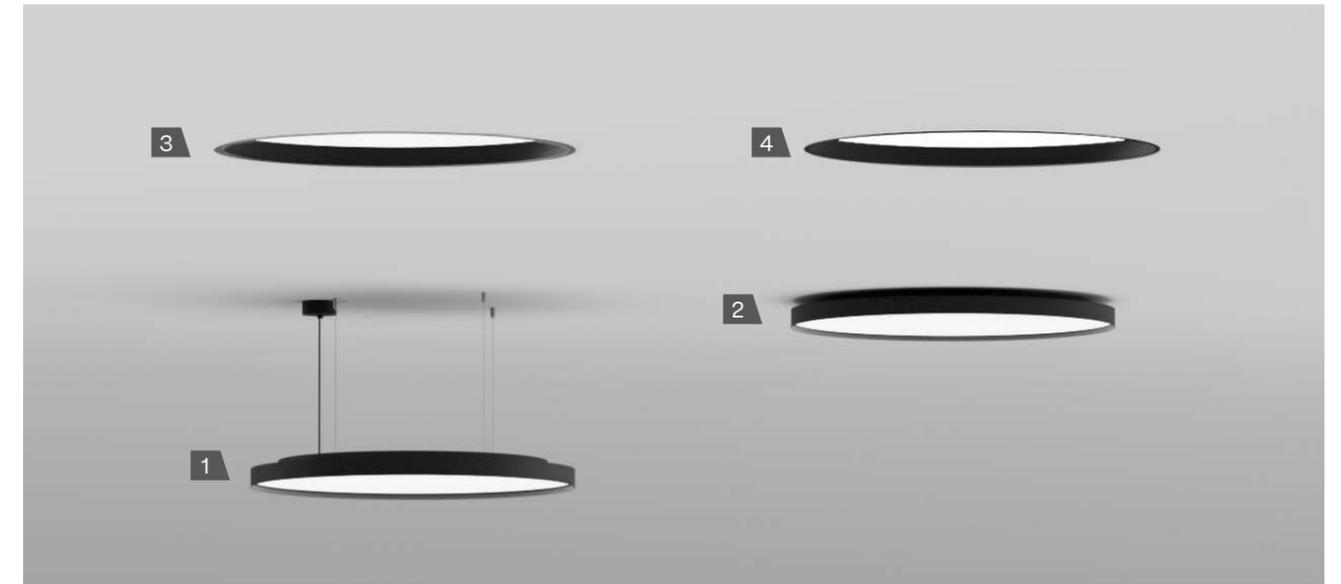


1. PENDANT - PENDANT UP LIGHT

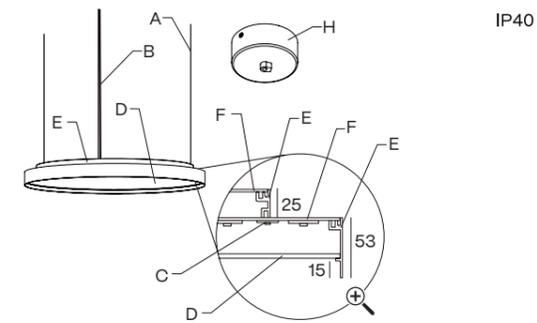


2. SURFACE

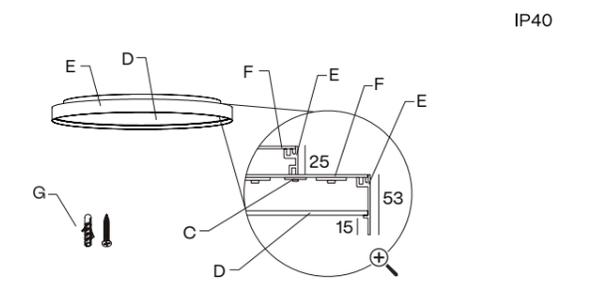

3. RECESSED WITH FRAME

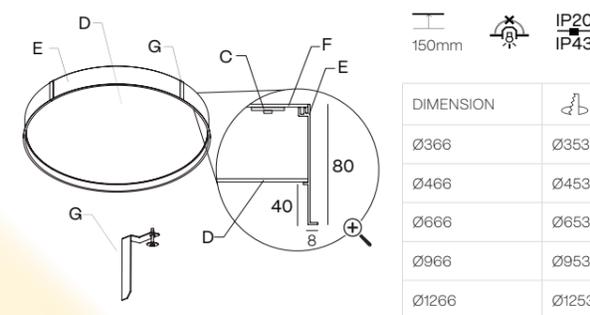

4. TRIMLESS

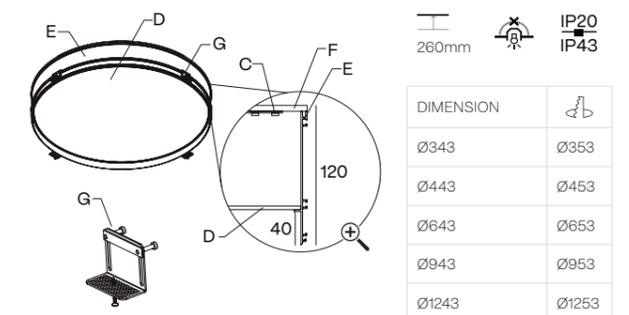

DIAMETERS mm.
350 · 450 · 650 · 950 · 1250

HEIGHT mm.
53 · 80 · 120

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material


COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø102	.25 .35	CB10		 Ø85 + CB10	.25 .35	SC21
	 Ø150	.45 .65	CB02		 Ø125 + CB02	.45 .65	SC22
	 Ø310	.95 .125	CB05		 Ø215 + CB05	.95 .125	SC23

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 Ø102	600 mm	SC20.60
		800 mm	SC20.80
		1000 mm	SC20.100

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

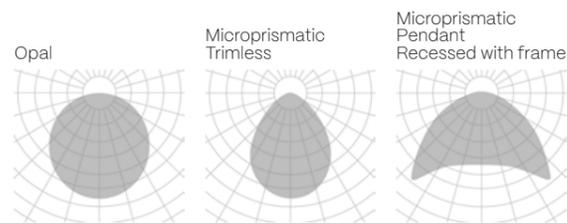

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 - Special finishes
 - Special color temperatures
 - Emergency lighting
 - Motion detection
 - Number switches
 - Wireless control options
 - Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD for pendant and surface

		Ø350	Ø450	Ø650	Ø950	Ø1250
24 V	13 W	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	19 W	2350 - 2392 - 2697 lm	4700 - 4784 - 5394 lm	10572 - 10704 - 12484 lm	21598 - 21976 - 25816 lm	36308 - 36848 - 43124 lm
Opal	2700 K	170EC 112	170ED 112	170EF 112	170EI 112	170EK 112
	3000 K	170EC 113	170ED 113	170EF 113	170EI 113	170EK 113
	4000 K	170EC 115	170ED 115	170EF 115	170EI 115	170EK 115
Microprismatic	2700 K	170EC 122	170ED 122	170EF 122	170EI 122	170EK 122
	3000 K	170EC 123	170ED 123	170EF 123	170EI 123	170EK 123
	4000 K	170EC 125	170ED 125	170EF 125	170EI 125	170EK 125

POWER STANDARD for recessed with frame

		Ø350	Ø450	Ø650	Ø950	Ø1250
24 V	13 W	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	29 W	2963 - 3111 - 3267 lm	4938 - 5185 - 5444 lm	11851 - 12444 - 13066 lm	21728 - 22814 - 23955 lm	34567 - 36295 - 38110 lm
Opal	2700 K	170EC5 112	170ED5 112	170EF5 112	170EI5 112	170EK5 112
	3000 K	170EC5 113	170ED5 113	170EF5 113	170EI5 113	170EK5 113
	4000 K	170EC5 115	170ED5 115	170EF5 115	170EI5 115	170EK5 115
Microprismatic	2700 K	170EC5 122	170ED5 122	170EF5 122	170EI5 122	170EK5 122
	3000 K	170EC5 123	170ED5 123	170EF5 123	170EI5 123	170EK5 123
	4000 K	170EC5 125	170ED5 125	170EF5 125	170EI5 125	170EK5 125

POWER STANDARD for trimless

		Ø350	Ø450	Ø650	Ø950	Ø1250
24 V	13 W	908 - 950 - 1020 lm	1287 - 1346 - 1445 lm	1816 - 1900 - 2040 lm	2724 - 2850 - 3060 lm	3556 - 3721 - 3995 lm
	17 W	2454 - 2907 - 3129 lm	4908 - 5814 - 6258 lm	9816 - 11628 - 12516 lm	17966 - 21318 - 22946 lm	29448 - 34884 - 37548 lm
Opal	2700 K	170EC6 112	170ED6 112	170EF6 112	170EI6 112	170EK6 112
	3000 K	170EC6 113	170ED6 113	170EF6 113	170EI6 113	170EK6 113
	4000 K	170EC6 115	170ED6 115	170EF6 115	170EI6 115	170EK6 115
Microprismatic	2700 K	170EC6 122	170ED6 122	170EF6 122	170EI6 122	170EK6 122
	3000 K	170EC6 123	170ED6 123	170EF6 123	170EI6 123	170EK6 123
	4000 K	170EC6 125	170ED6 125	170EF6 125	170EI6 125	170EK6 125

The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Light Direction**
 - Up light
 - Down light

OHIO SQ

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



INSTALLATION

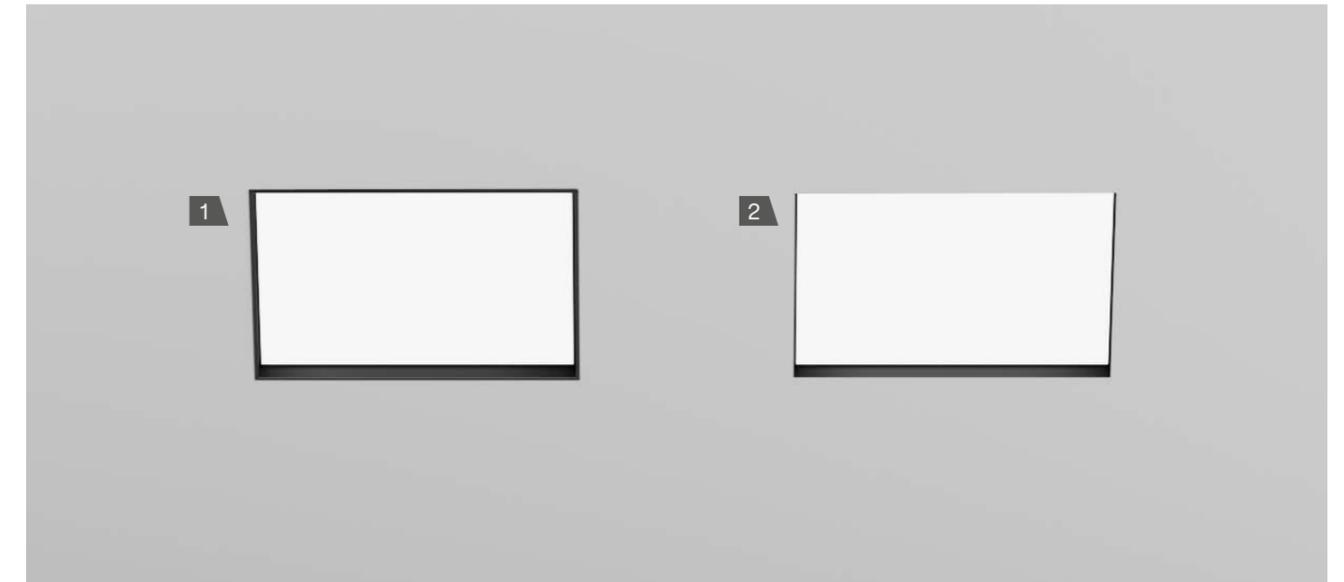

1. RECESSED WITH FRAME

150mm IP20 IP43

DIMENSION	Cut hole
366 x 366	353 x 353
466 x 466	453 x 453
666 x 666	653 x 653
966 x 966	953 x 953
1266 x 1266	1253 x 1253

2. TRIMLESS

260mm IP20 IP43

DIMENSION	Cut hole
343 x 343	353 x 353
443 x 443	453 x 453
643 x 643	653 x 653
943 x 943	953 x 953
1243 x 1243	1253 x 1253

WIDTH x LENGTH mm.
343 x 343 · 443 x 443 · 643 x 643
943 x 943 · 1243 x 1243

HEIGHT mm.
80 · 120

C - LED module
D - Diffuser
E - Aluminium profile
F - Aluminium cover
G - Mounting kit




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


TECHNICAL INFORMATION

POWER STANDARD for recessed with frame

						
	700 mA	29 W 2963 - 3111 - 3267 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
Opal	2700 K	171EC5 112 ✖	171ED5 112 ✖	171EF5 112 ✖	171EI5 112 ✖	171EK5 112 ✖
	3000 K	171EC5 113 ✖	171ED5 113 ✖	171EF5 113 ✖	171EI5 113 ✖	171EK5 113 ✖
	4000 K	171EC5 115 ✖	171ED5 115 ✖	171EF5 115 ✖	171EI5 115 ✖	171EK5 115 ✖
Microprismatic	2700 K	171EC5 122 ✖	171ED5 122 ✖	171EF5 122 ✖	171EI5 122 ✖	171EK5 122 ✖
	3000 K	171EC5 123 ✖	171ED5 123 ✖	171EF5 123 ✖	171EI5 123 ✖	171EK5 123 ✖
	4000 K	171EC5 125 ✖	171ED5 125 ✖	171EF5 125 ✖	171EI5 125 ✖	171EK5 125 ✖

POWER STANDARD for trimless


						
	500 mA	29 W 2706 - 3111 - 3000 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
Opal	2700 K	171EC6 112 ✖	171ED6 112 ✖	171EF6 112 ✖	171EI6 112 ✖	171EK6 112 ✖
	3000 K	171EC6 113 ✖	171ED6 113 ✖	171EF6 113 ✖	171EI6 113 ✖	171EK6 113 ✖
	4000 K	171EC6 115 ✖	171ED6 115 ✖	171EF6 115 ✖	171EI6 115 ✖	171EK6 115 ✖
Microprismatic	2700 K	171EC6 122 ✖	171ED6 122 ✖	171EF6 122 ✖	171EI6 122 ✖	171EK6 122 ✖
	3000 K	171EC6 123 ✖	171ED6 123 ✖	171EF6 123 ✖	171EI6 123 ✖	171EK6 123 ✖
	4000 K	171EC6 125 ✖	171ED6 125 ✖	171EF6 125 ✖	171EI6 125 ✖	171EK6 125 ✖

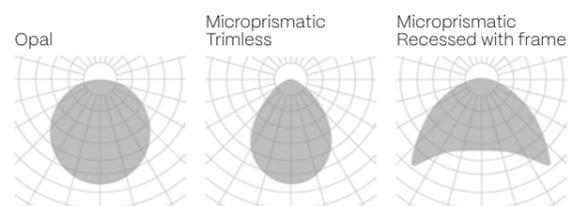


The data shown corresponds to raw values.

- INSTALLATION**
 - 5 · Recessed with frame
 - 6 · Trimless
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- ON DEMAND OPTIONS**
 - Special finishes
 - Emergency lighting
 - Special color temperatures
 - Motion detection
 - Number switches
 - Wireless control options

Down light

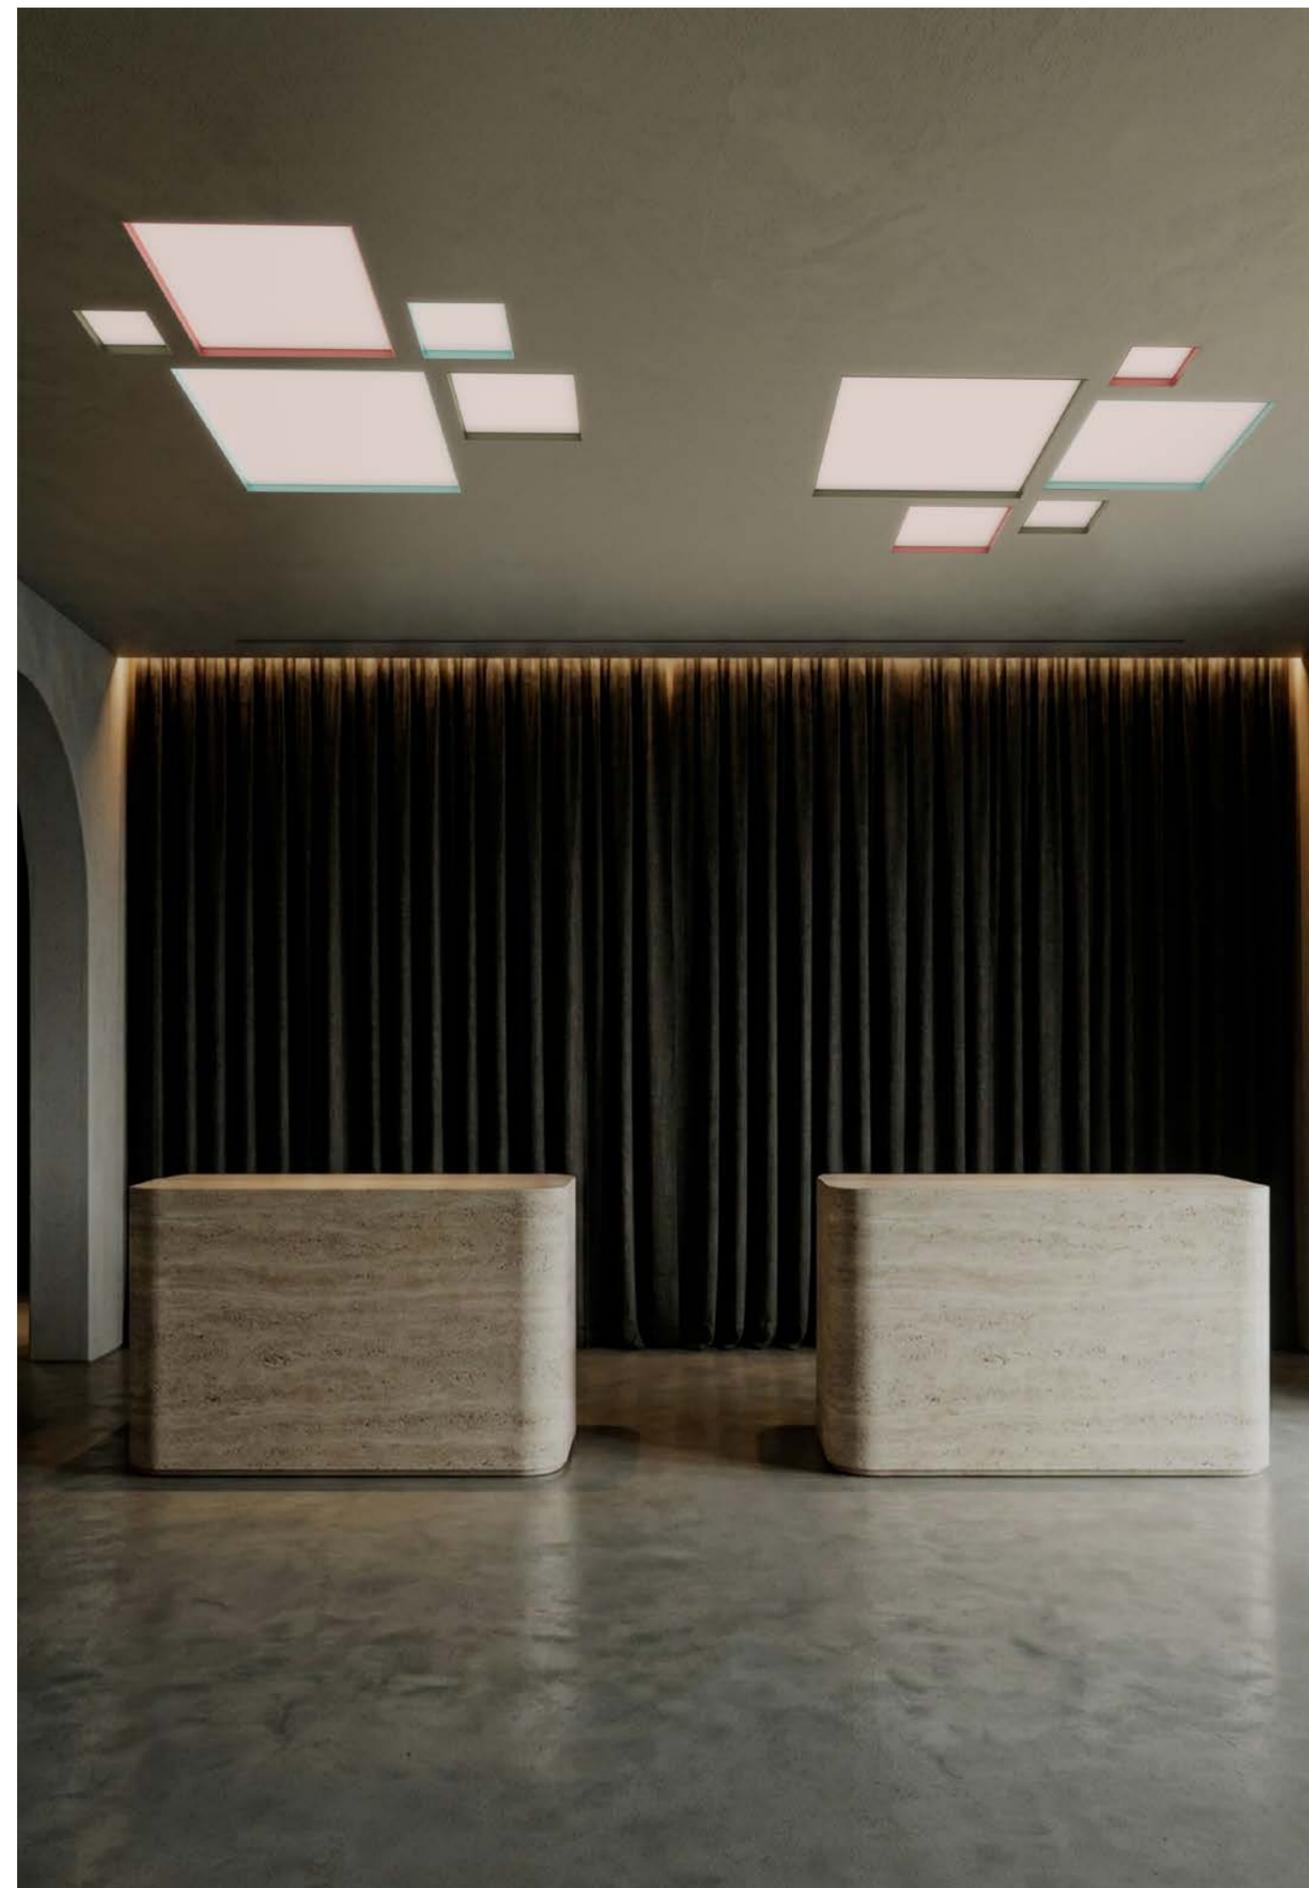

ALARIK SLIM LUMINAIRE FAMILY

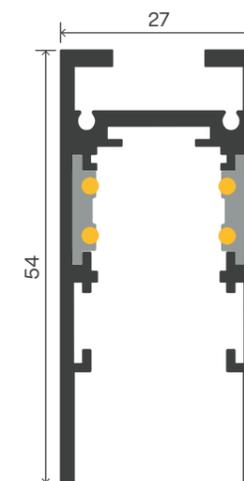


ALARIK SLIM LUMINAIRE
REF. 175
PAG. 156

ALARIK SLIM LUMINAIRE


NEW



INSTALLATION

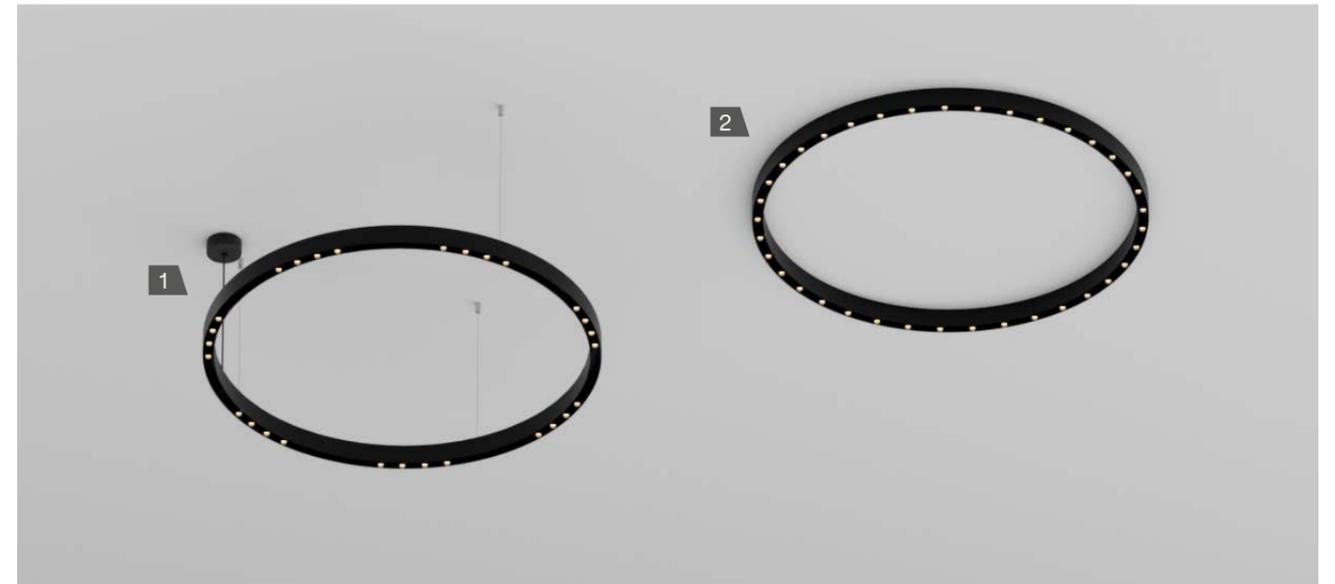


1. PENDANT

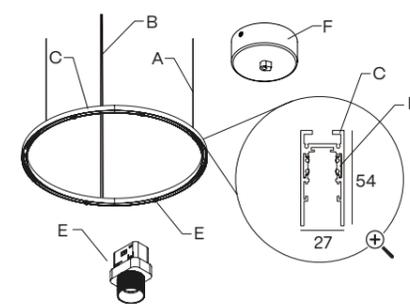

IP20

2. SURFACE

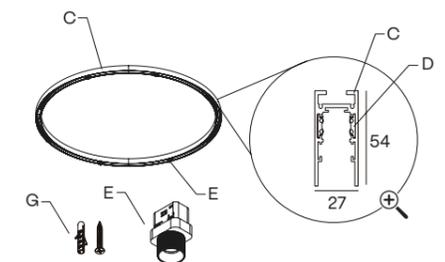

IP20






DIAMETERS mm.
650 · 950 · 1250




HEIGHT mm.
54

- A - 3x aircraft cable (3 m)
- B - Power cable
- C - Aluminium Profile
- D - Copper conductors
- E - Dot
- F - Included connection box

COMPONENTS

PENDANT


CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10 		 + 	.35	SC21 
	 26 Ø150	.45 .65	CB02 		 + 	.45 .65	SC22 
	 47 Ø310	.95 .125 .150	CB05 		 + 	.95 .125 .150	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

GENERAL COMPONENTS

48V TRANSFORMER		DALI 48V TRANSFORMER	
75 W	DR48.01	75 W	DR48.01.DA
120 W	DR48.02	120 W	DR48.02.DA
200 W	DR48.03	200 W	DR48.03.DA




PENDANT COMPONENTS

SUSPENSION KIT	REMOTE 48V TRANSFORMER BOX
	
ACC20224.SC	CB09.12 

FINISH
B · Black
W · White
S · Special color


ON DEMAND OPTIONS
 Special Finishes
 Custom Dimensions

TECHNICAL INFORMATION

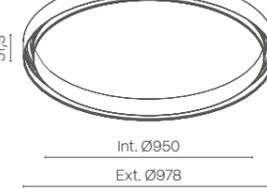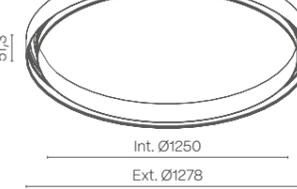		
Int. Ø650 Ext. Ø678	Int. Ø950 Ext. Ø978	Int. Ø1250 Ext. Ø1278
175EF  B000X	175EI  B000X	225EK  B000X

POWER STANDARD

IP20		
	48 VdC	1W 130 - 145 - 161lm
20°	2700 K	231EB9B132 
	3000 K	231EB9B133 
	4000 K	231EB9B135 



The data shown corresponds to raw values.

INSTALLATION
1 · Pendant
3 · Surface

DIMM OPTIONS
O · On-Off
D · Dali

 Down light

Un sistema lineal para espacios arquitectónicos

Concebido como una herramienta de iluminación versátil, el sistema lineal de BPM se adapta a la geometría y al ritmo de la arquitectura. Las líneas continuas de luz permiten estructurar, guiar y definir el espacio con precisión.

Basado en perfiles de aluminio extrusionado y difusores técnicos, el sistema ofrece iluminación uniforme, confort visual y opciones de configuración flexibles para proyectos arquitectónicos profesionales.

A linear system for architectural spaces

Designed as a versatile lighting tool, the BPM linear system adapts to the geometry and rhythm of the architecture. Continuous lines of light allow the space to be structured, guided and defined with precision.

Based on extruded aluminium profiles and technical diffusers, the system offers uniform illumination, visual comfort and flexible configuration options for professional architectural projects.

LINTEARMS
SYSTEMS

ALARIK
PAG. 164

TRACKLIGHT
PAG. 184

ALBA
PAG. 192


FLY
PAG. 236

VAULT
PAG. 242


OKKIA
PAG. 248

ALZIRA
PAG. 254


LINEAR SYSTEMS

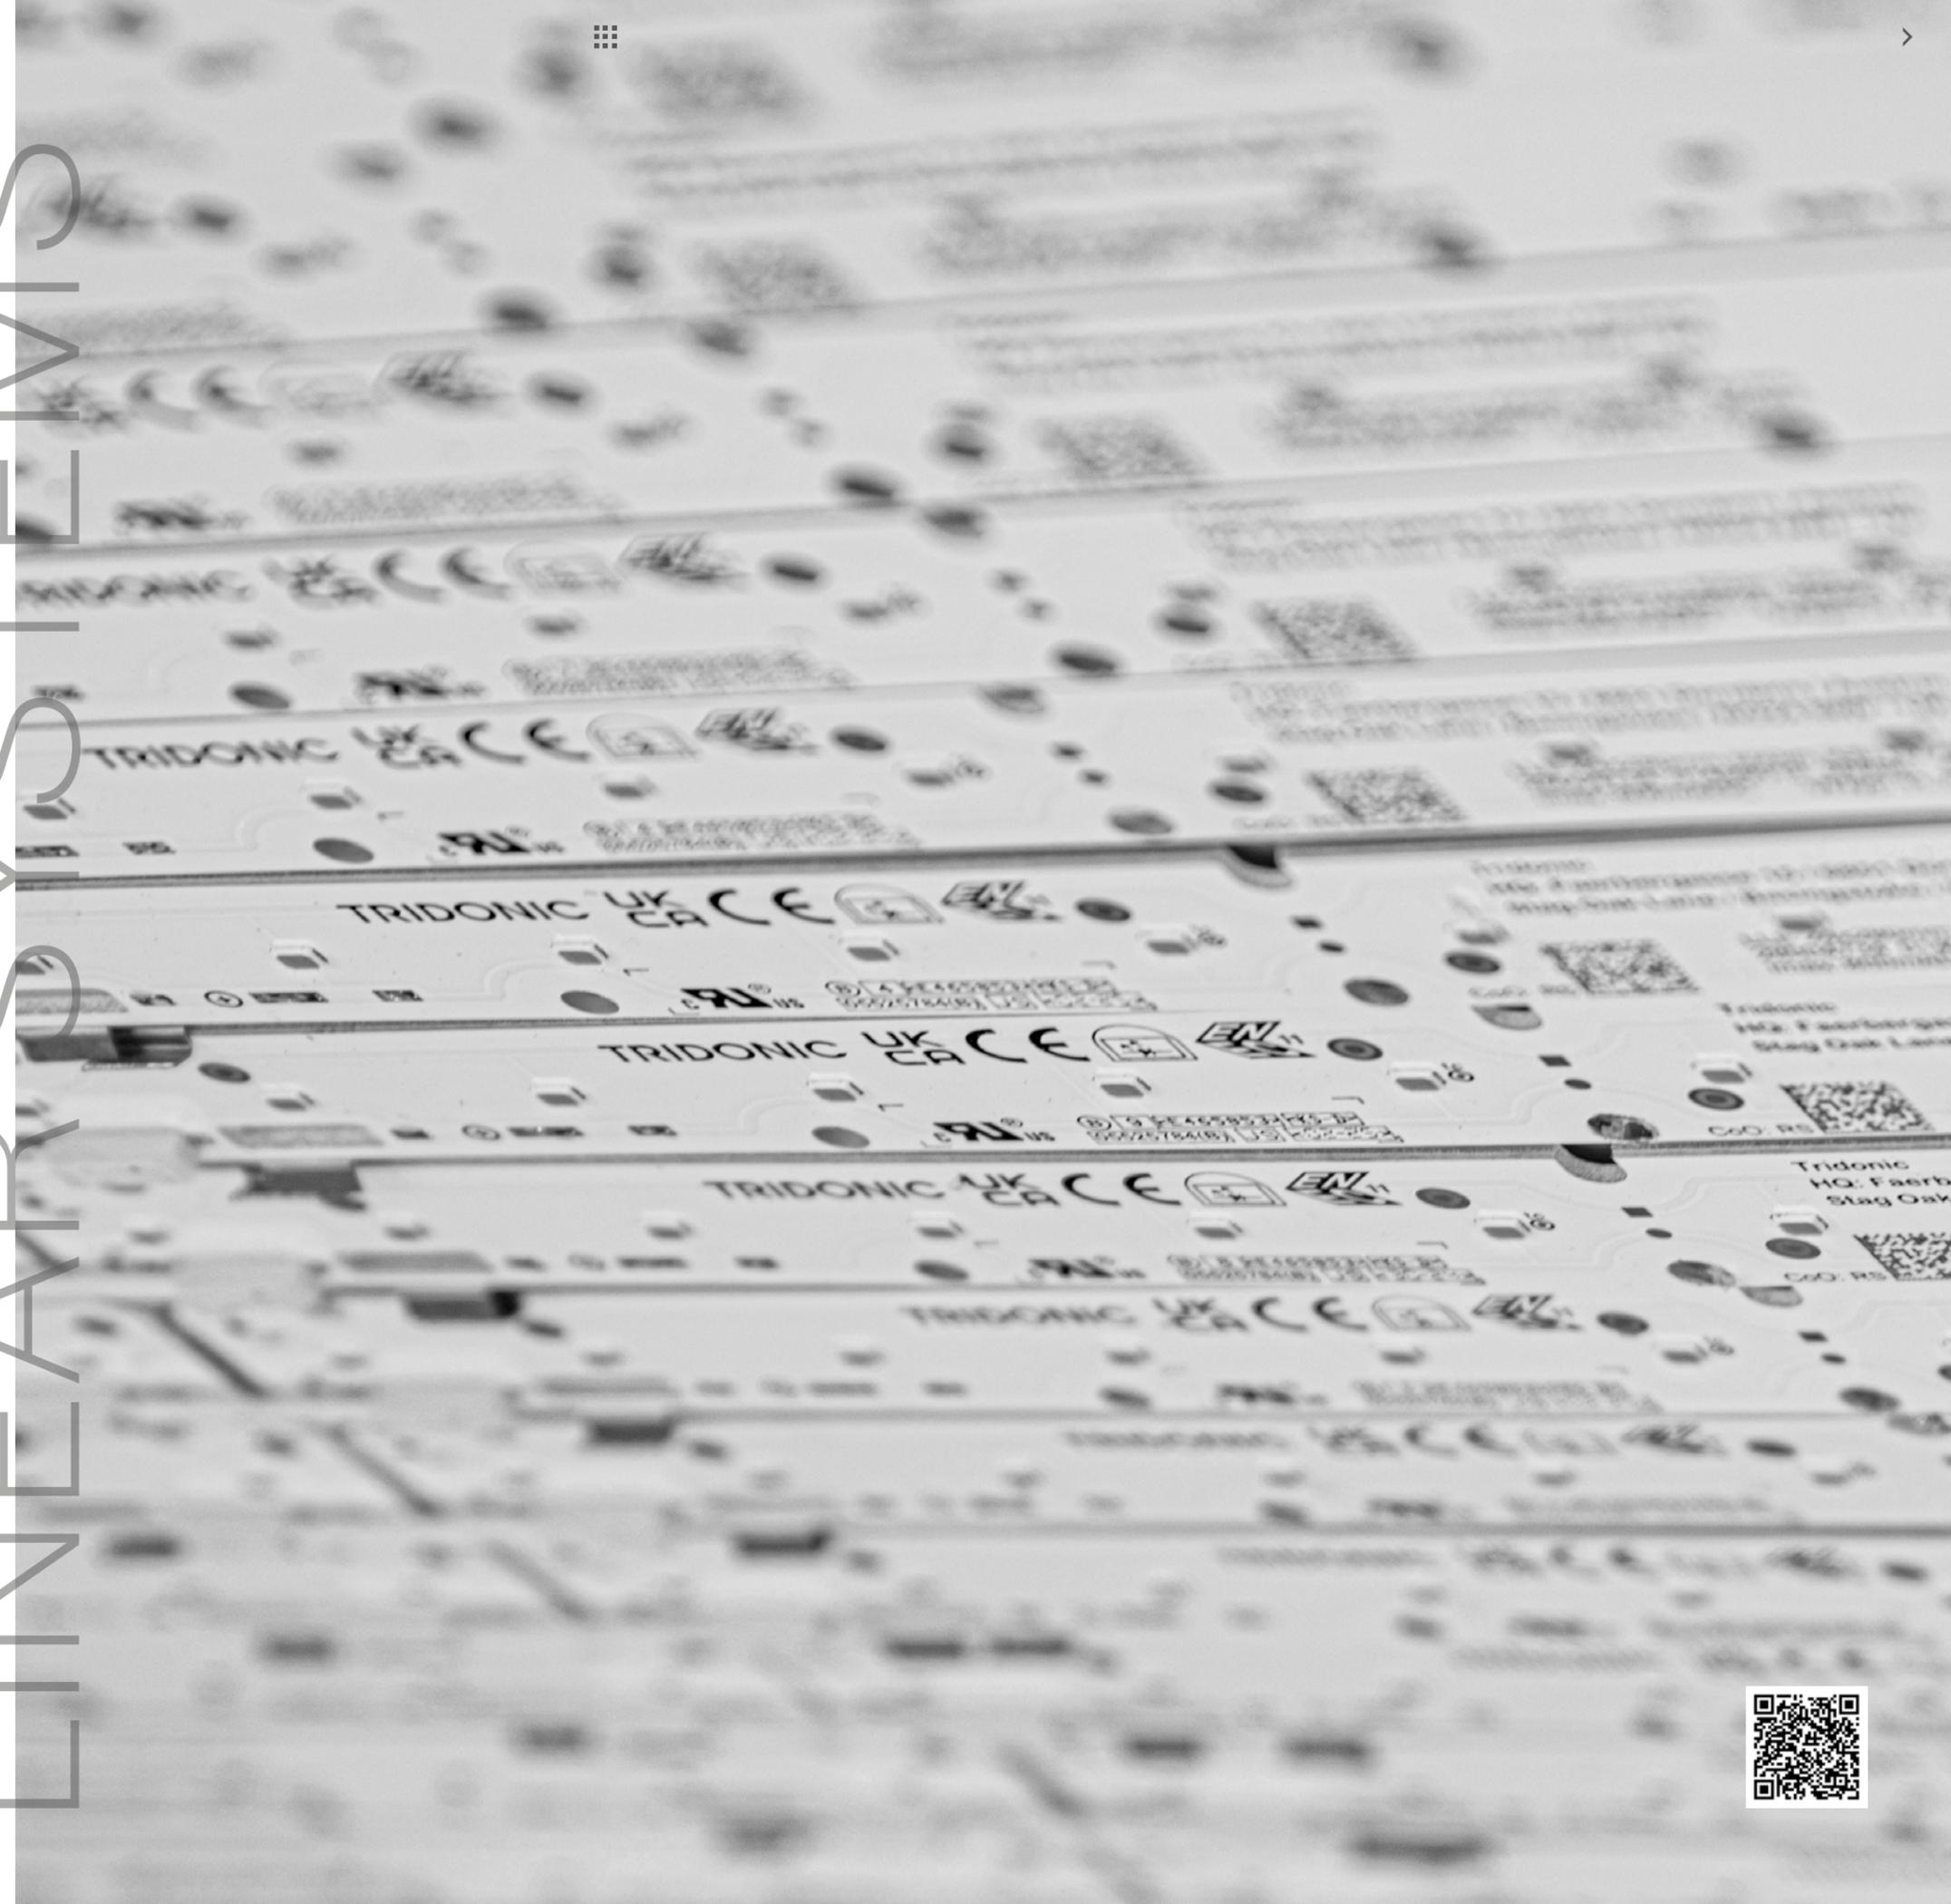


ALARIK FAMILY

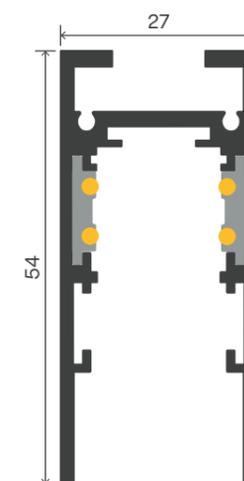

ALARIK SLIM
REF. 230
PAG. 166



ALARIK MINI
REF. 200
PAG. 172




ALARIK NANO
REF. 215
PAG. 178

ALARIK SLIM

- ALUMINIUM
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- 48V REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE





LIGHT MODULES

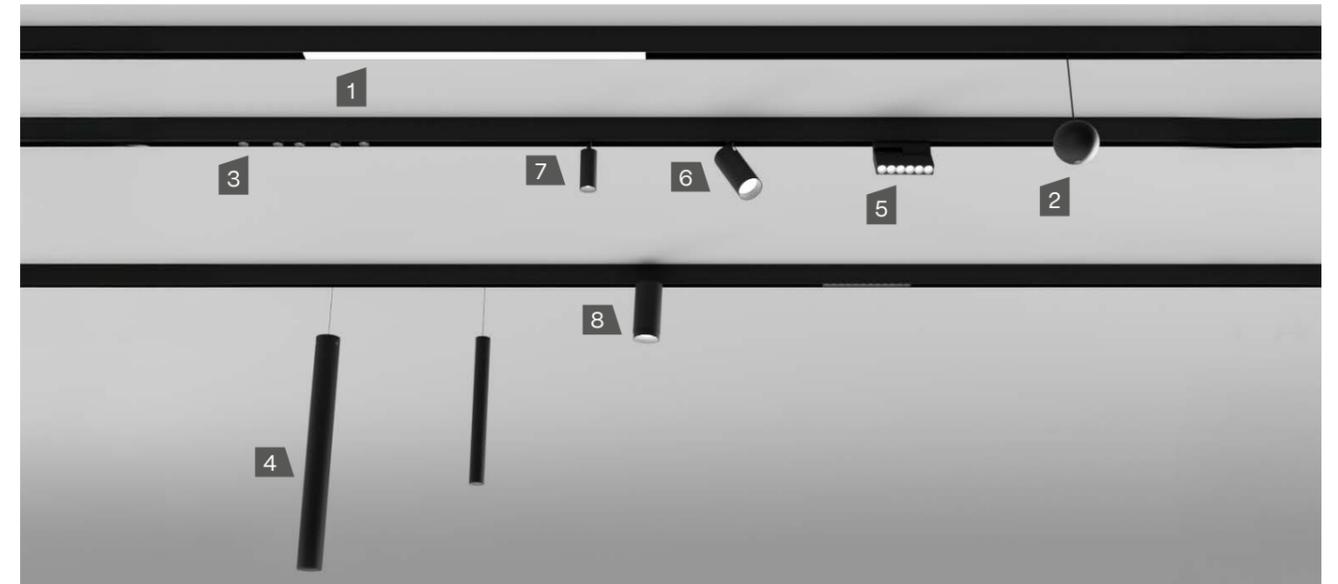


1. SLIM LED MODULES

IP20



	48 VdC	7 W 1004 - 1027 - 1038 lm	14 W 2007 - 2053 - 2076 lm	27 W 3670 - 3754 - 3796 lm
Opal	2700 K	233EB9 112 ✖	233EE9 112 ✖	233EH9 112 ✖
	3000 K	233EB9 113 ✖	233EE9 113 ✖	233EH9 113 ✖
	4000 K	233EB9 115 ✖	233EE9 115 ✖	233EH9 115 ✖

Opal



The data shown corresponds to raw values.

FINISH

- B · Black
- W · White

DIMM OPTIONS

- O · On-Off
- D · Dali
- V · 1.10v

Down light

LIGHT MODULES

2. SLIM LED BALL

IP20


48 VdC	7 W	793 - 826 - 875 lm
2700 K	232EB9	152 ✖
	232EB9	153 ✖
	232EB9	155 ✖



3. SLIM DOT

IP20


48 VdC	1 W	130 - 145 - 161 lm
2700 K	231EB9B132	✖
	231EB9B133	✖
	231EB9B135	✖



4. SLIM LED TUBE

IP20


48 VdC	3 W	151 - 187 - 212 lm	14 W	810 - 820 - 881 lm
2700 K	234EB9	1 1 2 ✖	234EH9	1 1 2 ✖
	234EB9	1 1 3 ✖	234EH9	1 1 3 ✖
	234EB9	1 1 5 ✖	234EH9	1 1 5 ✖

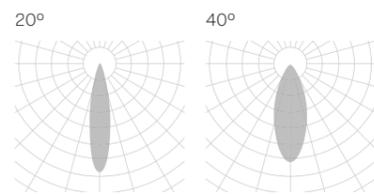

5. SLIM MOTION LENSES

IP20

48 VdC	9 W	749 - 832 - 894 lm
2700 K	237EB9	1 1 2 ✖
	237EB9	1 1 3 ✖
	237EB9	1 1 5 ✖

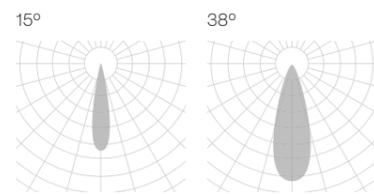

The data shown corresponds to raw values.

BEAM ANGLE	FINISH	DIMM OPTIONS	Down light
1 · 15°	B · Black	○ · On-Off	
3 · 20°	W · White	D · Dali	
5 · 40° - 38°		V · 1.10v	


LIGHT MODULES

6. SLIM PATRICIA ZOOM

IP20

350°
90°

48 VdC	21 W	2368 - 2476 - 2620 lm
15° to 36° - 38° to 60°	239EB9	1 1 2 ✖
	239EB9	1 1 3 ✖
	239EB9	1 1 5 ✖

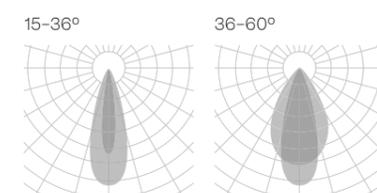


7. SLIM PATRICIA

IP20

350°
90°


48 VdC	7 W	784 - 819 - 867 lm	13 W	1306 - 1366 - 1445 lm	
15° - 38° - 60°	2700 K	238EB9	1 1 2 ✖	238EE9	1 1 2 ✖
	3000 K	238EB9	1 1 3 ✖	238EE9	1 1 3 ✖
	4000 K	238EB9	1 1 5 ✖	238EE9	1 1 5 ✖

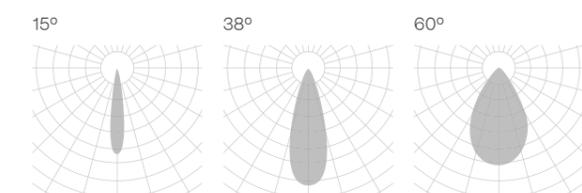

8. SLIM LENSES

IP20

48 VdC	9 W	749 - 832 - 894 lm	15 W	1320 - 1626 - 1626 lm	
15° - 38°	2700 K	235EB9	1 1 2 ✖	235EE9	1 1 2 ✖
	3000 K	235EB9	1 1 3 ✖	235EE9	1 1 3 ✖
	4000 K	235EB9	1 1 5 ✖	235EE9	1 1 5 ✖

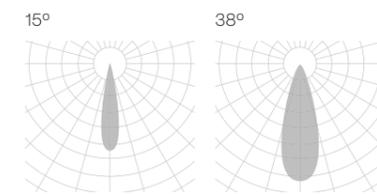


The data shown corresponds to raw values.


BEAM ANGLE	FINISH	DIMM OPTIONS	Down light
2 · 15° to 36° - 15°	B · Black	○ · On-Off	
5 · 36° to 60° - 38°	W · White	D · Dali	
7 · 60°		V · 1.10v	

PROFILES


PENDANT

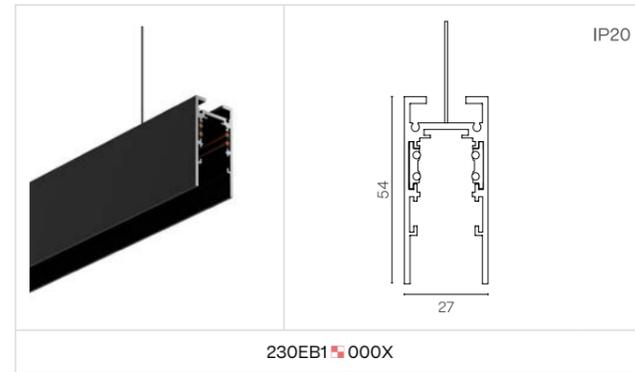


SURFACE

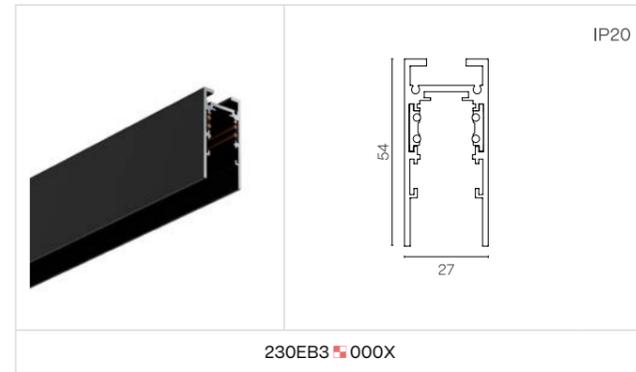

RECESSED WITH FRAME

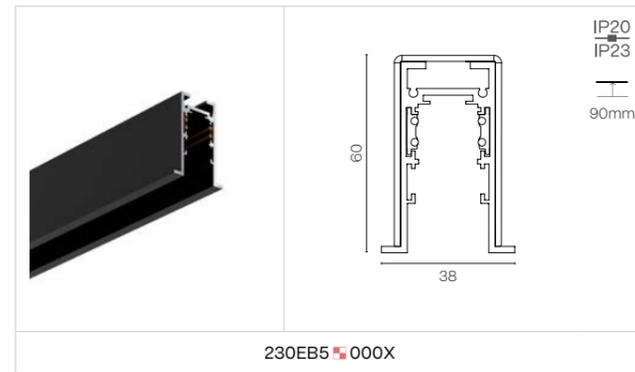


TRIMLESS

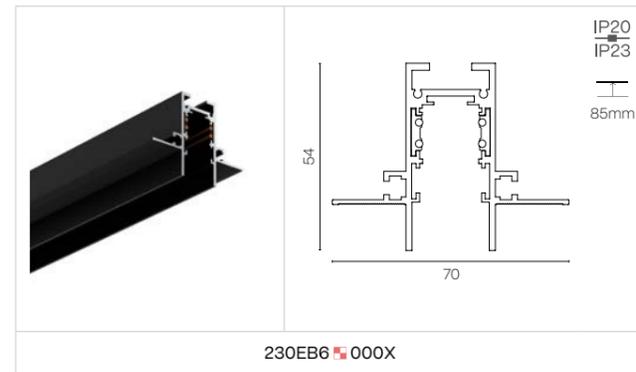


Total length = profile length + 2x8mm (cover kit)
 (Total length - 8mm) x 30mm

Total length = profile length + 2x8mm (cover kit)
 (Total length - 8mm) x 30mm

ROUND PENDANT

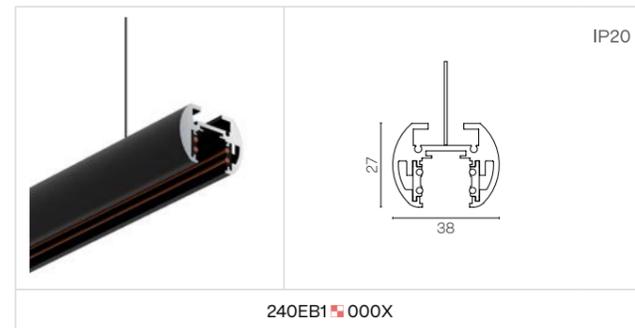

ROUND SURFACE

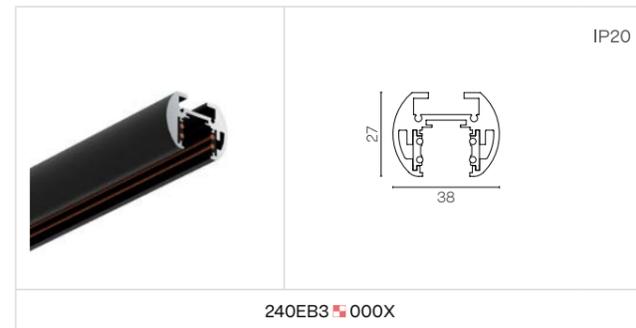

- FINISH**
- B · Black
 - W · White
 - S · Special color

- ON DEMAND OPTIONS**
- Special finishes
 - Custom dimensions

COMPONENTS

GENERAL COMPONENTS

COVER KIT	COVER KIT ROUND	48V TRANSFORMER	
		75 W	DR40.01
TF19 	TF20 	120 W	DR40.02
		200 W	DR40.03

PENDANT COMPONENTS

SUSPENSION KIT	SUSPENSION KIT WITH 48 TRANSFORMER BOX		48V TRANSFORMER BOX	REMOTE 48V TRANSFORMER BOX
ACC20224.SC	ACC20224.PKDB	CB08.30	CB09.32 	CB09.12

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT	POWER FEEDER UNIT 3M.	T JOINT UT19
				X JOINT UX19
UR19 	UL19 	UV19 	ACC20224.CA 	

CURVE JOINT KIT	DIMENSIONS	REFERENCE	CURVE JOINT KIT	DIMENSIONS	REFERENCE
	350 mm	ACC20224.01.45. 		350 mm	ACC20224.01.90.
	450 mm	ACC20224.02.45. 		450 mm	ACC20224.02.90.
	650 mm	ACC20224.03.45. 		650 mm	ACC20224.03.90.

- INSTALLATION**
- Pendant
 - Surface
 - Recessed with frame
 - Trimless
- FINISH**
- B · Black
 - W · White
 - S · Special color

ALARIK MINI




1. MINI LED MODULES

IP20

	5 W	10 W	20 W
	851 - 875 - 880 lm	1673 - 1720 - 1729 lm	3345 - 3440 - 3459 lm
Opal	2700 K 201EB9B112 ✖	201EE9B112 ✖	201EH9B112 ✖
	3000 K 201EB9B113 ✖	201EE9B113 ✖	201EH9B113 ✖
	4000 K 201EB9B115 ✖	201EE9B115 ✖	201EH9B115 ✖

Opal



The data shown corresponds to raw values.


✖ DIMM OPTIONS

- On-Off
- Dali


Down light

LIGHT MODULES


2. MINI LENSES

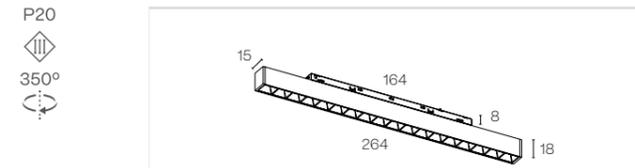


IP20	48 VdC	7 W	921 - 945 - 1087 lm
23° - 28° - 36°	2700 K	202EB9	1 2 ✖
	3000 K	202EB9	1 3 ✖
	4000 K	202EB9	1 5 ✖

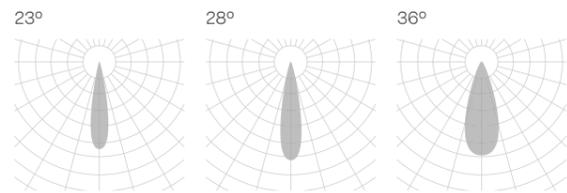

3. MINI MOTION LENSES

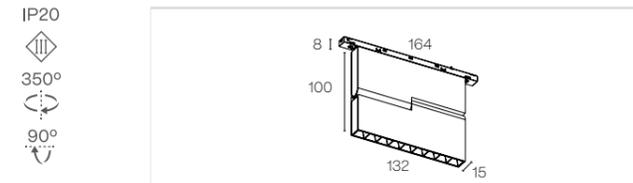


IP20	48 VdC	7 W	921 - 945 - 1087 lm
23° - 28° - 36°	2700 K	203EB9	1 20
	3000 K	203EB9	1 30
	4000 K	203EB9	1 50

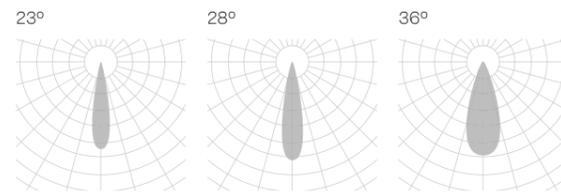

4. MINI PATRICIA



IP20	48 VdC	2 W	203 - 208 - 239 lm
15° - 24° - 30°	2700 K	204EB9	1 2 ✖
	3000 K	204EB9	1 3 ✖
	4000 K	204EB9	1 5 ✖
		5 W	612 - 639 - 676 lm
15° - 24° - 30°	2700 K	204EE9	1 2 ✖
	3000 K	204EE9	1 3 ✖
	4000 K	204EE9	1 5 ✖

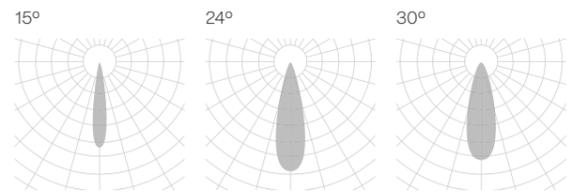


The data shown corresponds to raw values.


FINISH	BEAM ANGLE	DIMM OPTIONS	Down light
B · Black	2 · 15°	O · On-Off	
W · White	3 · 23° - 24°	D · Dali	
	4 · 28° - 30°		
	5 · 36°		

LIGHT MODULES


5. MINI PATRICIA FLAT

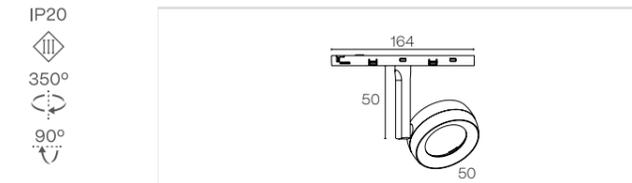


IP20	48 VdC	5 W	612 - 639 - 676 lm
15° - 30° - 36°	2700 K	205EB9	1 2 ✖
	3000 K	205EB9	1 3 ✖
	4000 K	205EB9	1 5 ✖

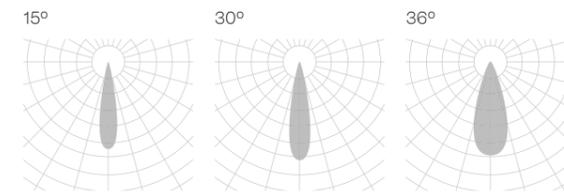


6. MINI PATRICIA LOL

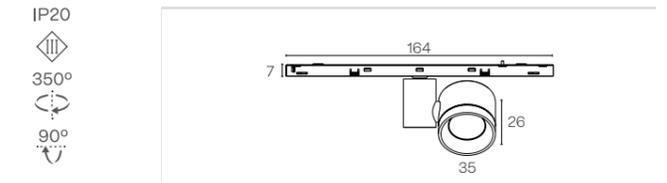


IP20	48 VdC	5 W	305 - 324 - 325 lm
15° - 24° - 36°	2700 K	206EB9	1 2 ✖
	3000 K	206EB9	1 3 ✖
	4000 K	206EB9	1 5 ✖

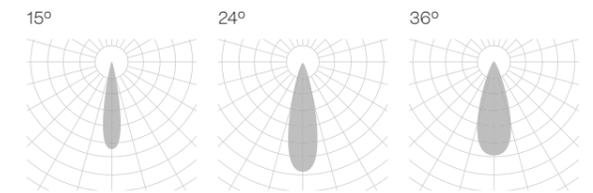


7. MINI PATRICIA ZOOM

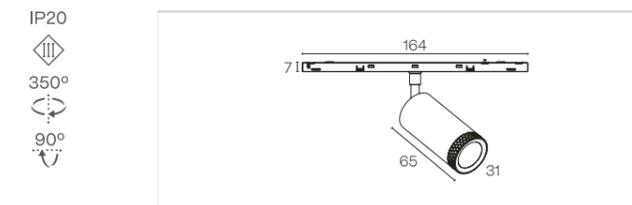


IP20	48 VdC	5 W	612 - 639 - 676 lm
15° to 40°	2700 K	207EB9	122 ✖
	3000 K	207EB9	123 ✖
	4000 K	207EB9	125 ✖

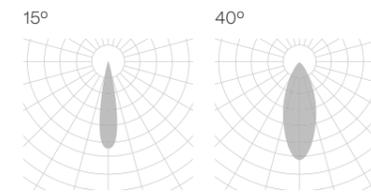

8. MINI ROUND LENSES

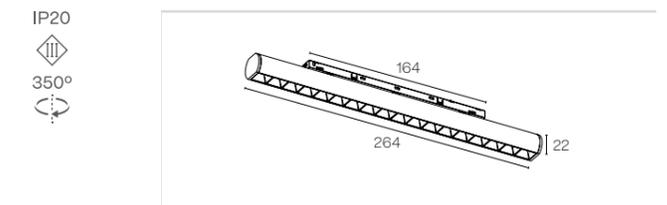

IP20	48 VdC	7 W	921 - 945 - 1087 lm
30° - 36° - 60°	2700 K	209EB9	1 2 ✖
	3000 K	209EB9	1 3 ✖
	4000 K	209EB9	1 5 ✖

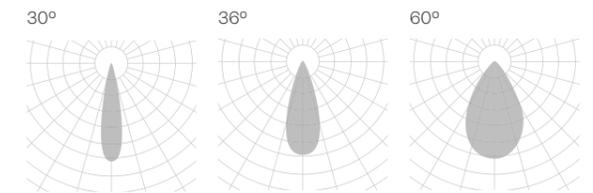


The data shown corresponds to raw values.


FINISH	BEAM ANGLE	DIMM OPTIONS	Down light
B · Black	2 · 15°	O · On-Off	
W · White	3 · 23° - 24°	D · Dali	
	4 · 30°		
	5 · 36°		
	6 · 60°		

PROFILES


PENDANT

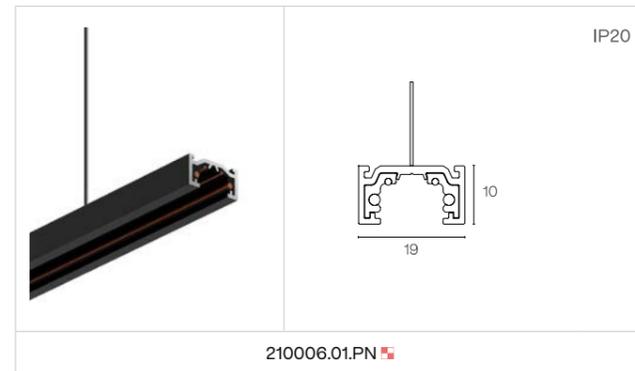

SURFACE

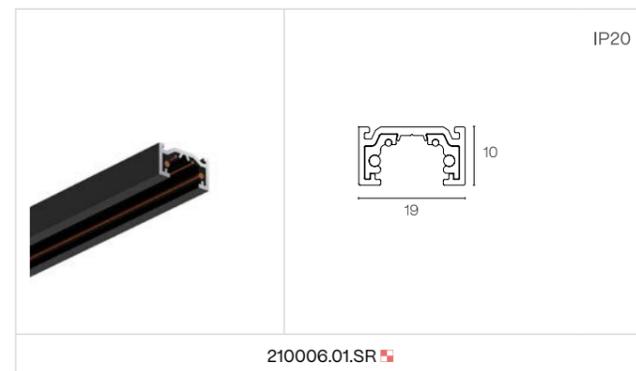


TRIMLESS

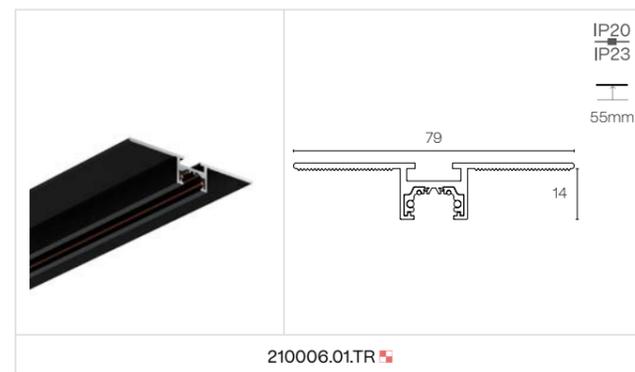

Total length = profile length + 2 x 2 mm (cover kit)
(Total length + 2 mm) x 30 mm

ROUND PENDANT

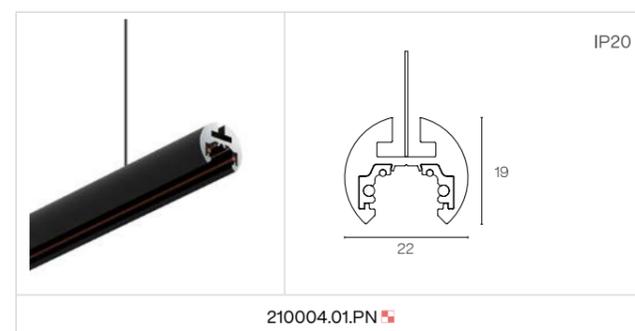

ROUND SURFACE



PENDANT INSTALLATIONS

When the profile (without end caps) measures up to 1500 mm, 2 suspension kits are used.
When the profile (without end caps) measures over to 1500 mm, 3 suspension kits are used.

- FINISH**
- B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
- Special finishes
 - Custom dimensions

COMPONENTS

GENERAL COMPONENTS

COVER KIT	COVER KIT ROUND	POWER FEEDER UNIT	POWER FEEDER UNIT	48V TRANSFORMER	
				75 W	DR40.01
TF21	TF22	ACC210006.CA	ACC210004.CA	120 W	DR40.02
				200 W	DR40.03
				48V TRANSFORMER only for surface	
				100 W	210006.DR.01
				200 W	210006.DR.02

Only for:
Alarik mini round PENDANT,
Alarik mini round SURFACE and
Alarik mini TRIMLESS.

PENDANT COMPONENTS

SUSPENSION KIT	SUSPENSION KIT WITH 48 TRANSFORMER BOX		48V TRANSFORMER BOX	REMOTE 48V TRANSFORMER BOX
ACC210022.SC	ACC20224.PKDB	CB08.30	CB09.12	CB06.40

JOINTS & CONNECTORS


LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	WALL-CEILING JOINT
UR21	UL21	UC21	UT21	UV21

CURVE JOINT KIT	DIMENSIONS	REFERENCE	CURVE JOINT KIT	DIMENSIONS	REFERENCE
	Ø350 mm	ACC210006.01.45		Ø350 mm	ACC210006.01.90
	Ø450 mm	ACC210006.02.45		Ø450 mm	ACC210006.02.90
	Ø650 mm	ACC210006.03.45		Ø650 mm	ACC210006.03.90


- FINISH**
- B · Black
 - W · White
 - S · Special color

ALARIK NANO

NEW

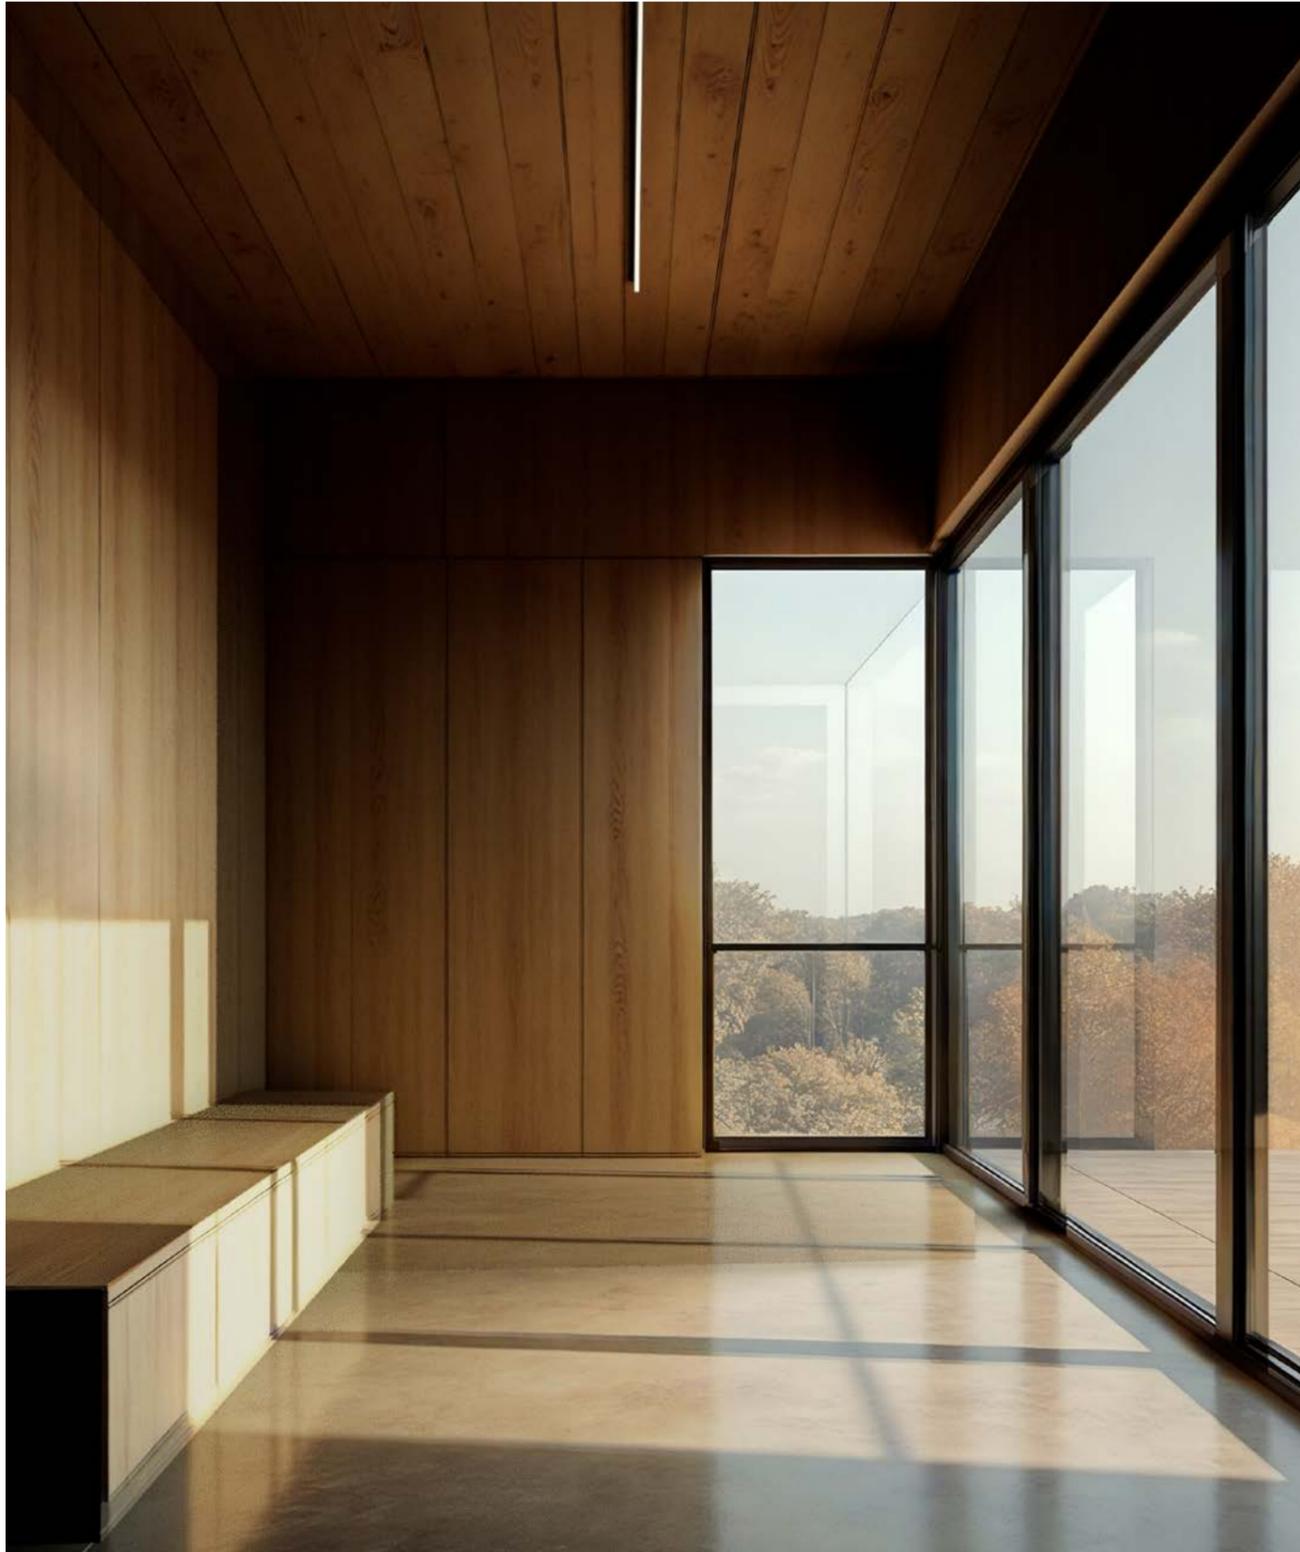


LIGHT MODULES

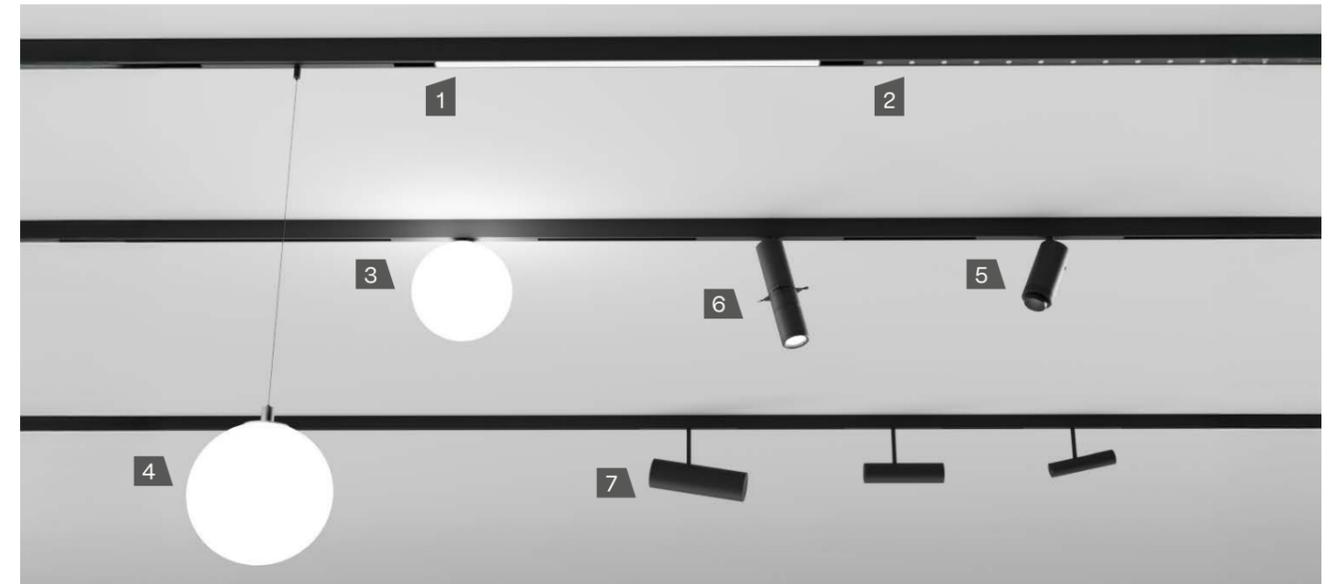


1. NANO LED MODULES

IP20

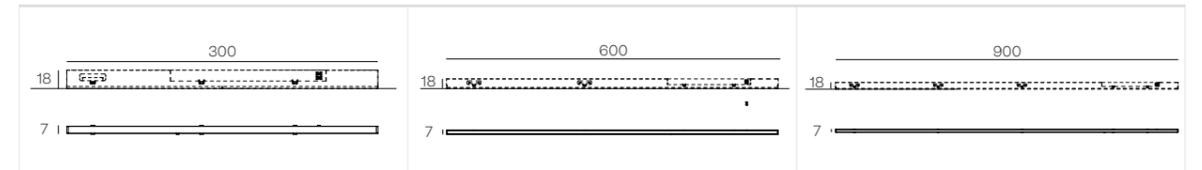

	48 VdC	5 W 495 - 512 - 605 lm	7,5 W 743 - 767 - 908 lm	11 W 1114 - 1151 - 1374 lm
Opal	2700 K	217EB9 ■ 112 ✘	217EE9 ■ 112 ✘	217EH9 ■ 112 ✘
	3000 K	217EB9 ■ 113 ✘	217EE9 ■ 113 ✘	217EH9 ■ 113 ✘
	4000 K	217EB9 ■ 115 ✘	217EE9 ■ 115 ✘	217EH9 ■ 115 ✘

Opal



The data shown corresponds to raw values.

■ FINISH

- B · Black
- W · White

✘ DIMM OPTIONS

- O · On-Off
- D · Dali

Down light

LIGHT MODULES

2. NANO LENSES COMPACT

IP20

48 VdC	3 W	324 - 342 - 378 lm
50°	2700 K	218EB9 ■ 162 ✖
	3000 K	218EB9 ■ 163 ✖
	4000 K	218EB9 ■ 165 ✖

50°

2. NANO WALL WASHER

IP20

48 VdC	9 W	622 - 692 - 761 lm
80°	2700 K	224EB9 ■ 162 ✖
	3000 K	224EB9 ■ 163 ✖
	4000 K	224EB9 ■ 165 ✖

9°

3. NANO ESFERA SURFACE

IP20

48 VdC	4,5 W	653 - 668 - 676 lm
Opal	2700 K	222EB9 ■ 112 ✖
	3000 K	222EB9 ■ 113 ✖
	4000 K	222EB9 ■ 115 ✖

Opal

4. NANO ESFERA PENDANT

IP20

48 VdC	4,5 W	653 - 668 - 676 lm
Opal	2700 K	223EB9 ■ 112 ✖
	3000 K	223EB9 ■ 113 ✖
	4000 K	223EB9 ■ 115 ✖

Opal

The data shown corresponds to raw values.

- FINISH
- ✖ DIMM OPTIONS
- Down light
- B · Black
- W · White
- O · On-Off
- D · Dali

LIGHT MODULES

5. NANO PATRICIA ZOOM

IP20

48 VdC	5,5 W	565 - 640 - 685 lm
18 to 31°	2700 K	221EB9 ■ 132 ✖
	3000 K	221EB9 ■ 133 ✖
	4000 K	221EB9 ■ 135 ✖

18° 31°

6. NANO PATRICIA SHAPE

IP20

48 VdC	5,5 W	357 - 380 lm
20 to 33°	2700 K	220EB9 ■ 132 ✖
	3000 K	220EB9 ■ 133 ✖
	4000 K	220EB9 ■ 135 ✖

20° 33°

7. NANO PATRICIA FLIP

IP20

24°	48 VdC	3,5 W	424 - 480 - 513 lm	5,5 W	565 - 640 - 685 lm	7 W	824 - 870 - 929 lm	13 W	1302 - 1375 - 1468 lm
	2700 K	219EB9 ■ 142 ✖	219EE9 ■ 142 ✖	219EH9 ■ 142 ✖	219EH9 ■ 342 ✖				
	3000 K	219EB9 ■ 143 ✖	219EE9 ■ 143 ✖	219EH9 ■ 143 ✖	219EH9 ■ 343 ✖				
38°	2700 K	219EB9 ■ 145 ✖	219EE9 ■ 145 ✖	219EH9 ■ 145 ✖	219EH9 ■ 345 ✖				
	3000 K	219EB9 ■ 152 ✖	219EE9 ■ 152 ✖	219EH9 ■ 152 ✖	219EH9 ■ 352 ✖				
	4000 K	219EB9 ■ 153 ✖	219EE9 ■ 153 ✖	219EH9 ■ 153 ✖	219EH9 ■ 353 ✖				
4000 K	219EB9 ■ 155 ✖	219EE9 ■ 155 ✖	219EH9 ■ 155 ✖	219EH9 ■ 355 ✖					


18° 43°

The data shown corresponds to raw values.


- FINISH
- ✖ DIMM OPTIONS
- Down light
- B · Black
- W · White
- O · On-Off
- D · Dali

PROFILES


PENDANT

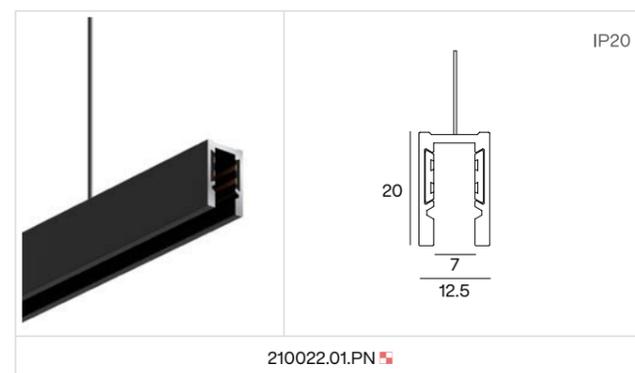


PENDANT DOUBLE

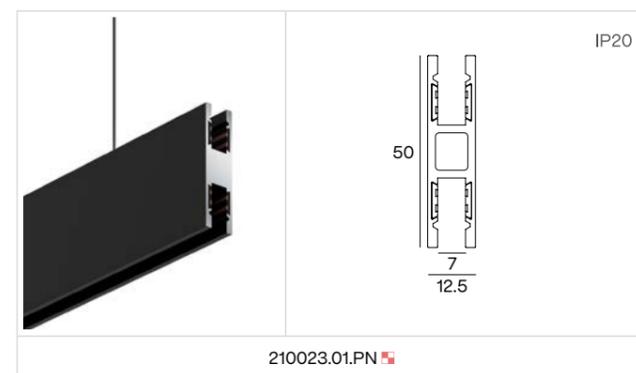

SURFACE

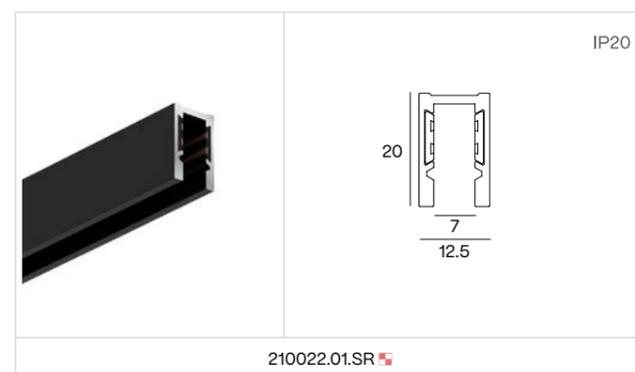

TRIMLESS

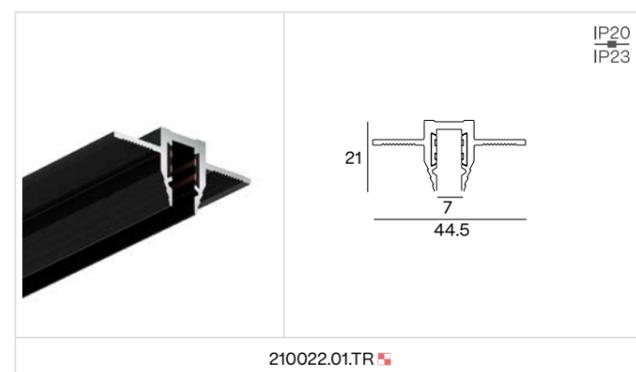

PENDANT INSTALLATIONS

When the profile (without end caps) measures up to 2000 mm, 2 suspension kits are used.
When the profile (without end caps) measures over to 2000 mm, 3 suspension kits are used.

FINISH

- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS


- Special finishes
- Custom dimensions

COMPONENTS

GENERAL COMPONENTS



PENDANT COMPONENTS

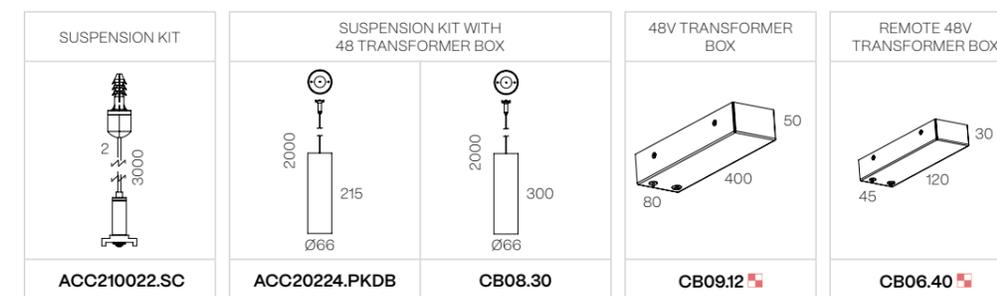

JOINTS & CONNECTORS




*1 Requires two units for Alarik Nano Double profile. *Requiere de dos unidades para el perfil Alarik Nano Double.*
*2 Only works with Alarik Nano profile. *Únicamente funciona en el perfil Alarik Nano.*

FINISH

- B** · Black
- W** · White


TRACKLIGHT FAMILY

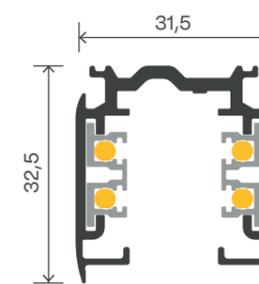


CIRCUIT TRACK
REF. ACC6684
PAG. 186

TRACKLIGHT




NEW

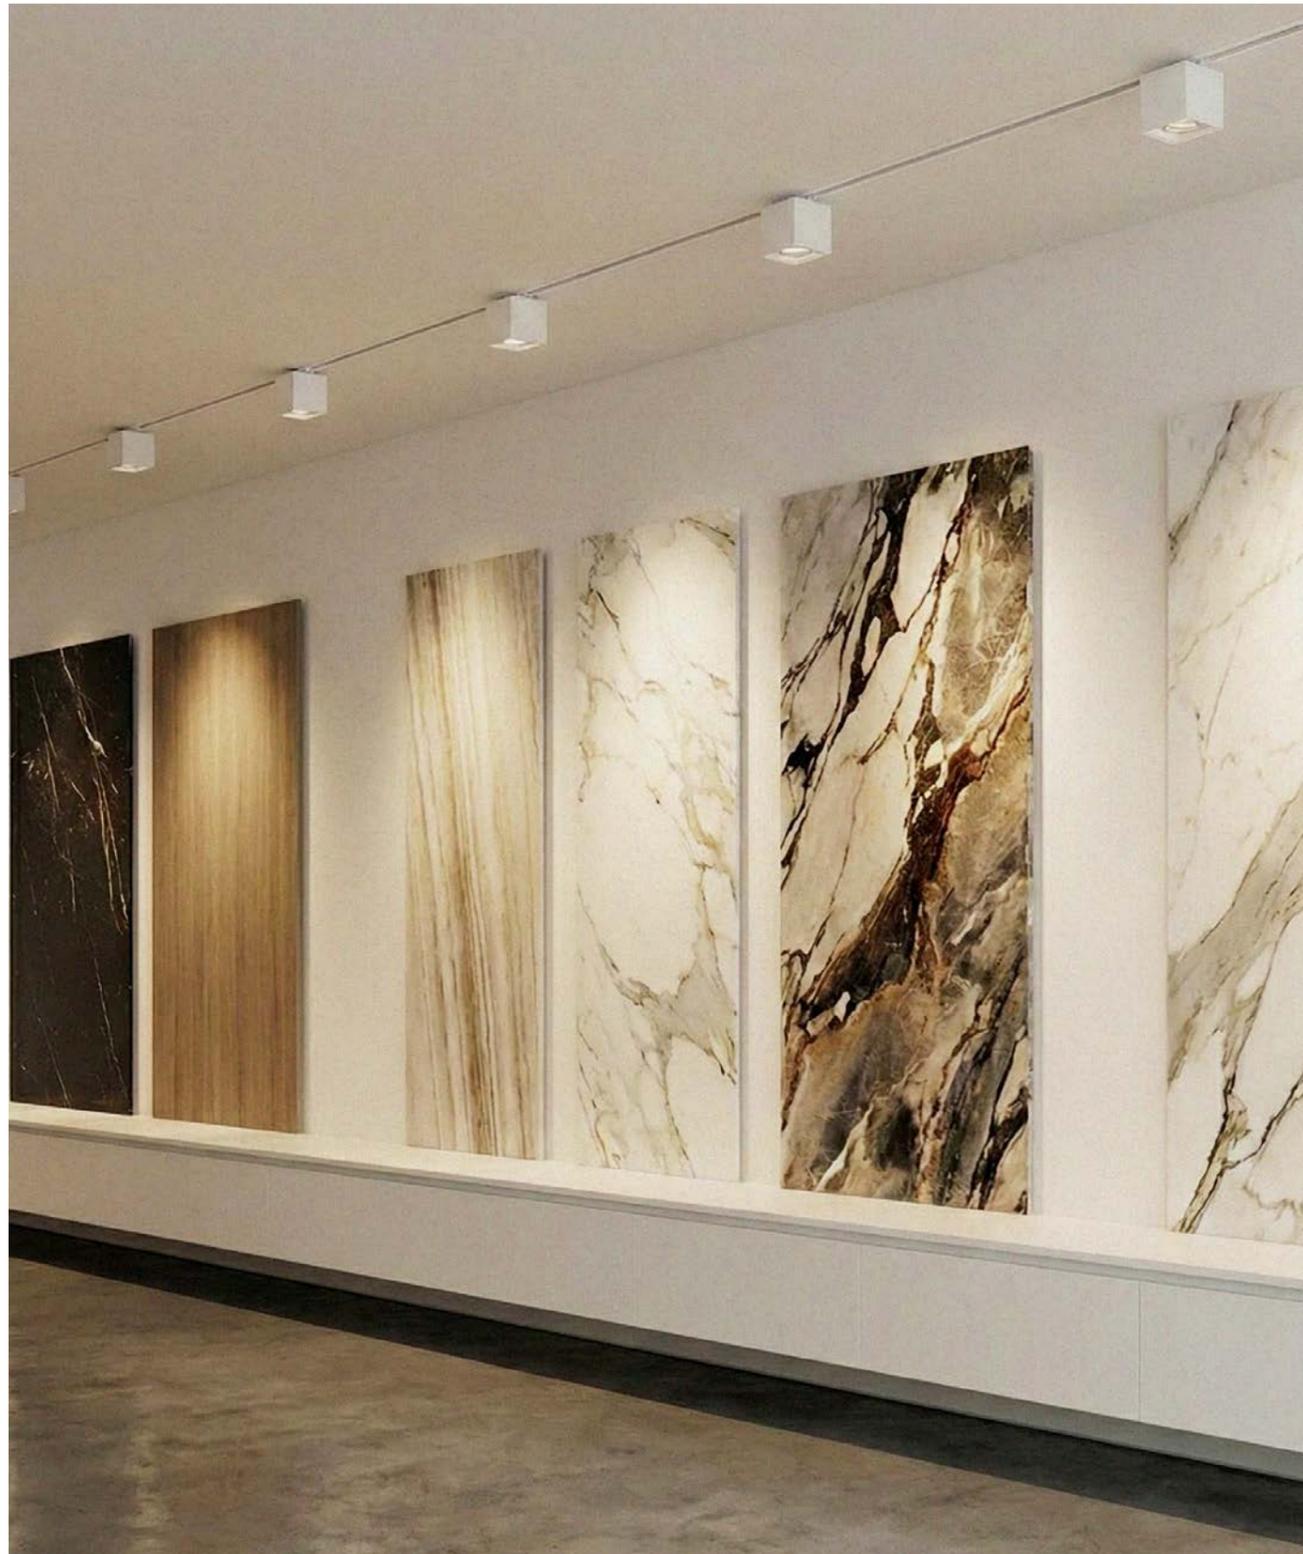

LIGHT MODULES

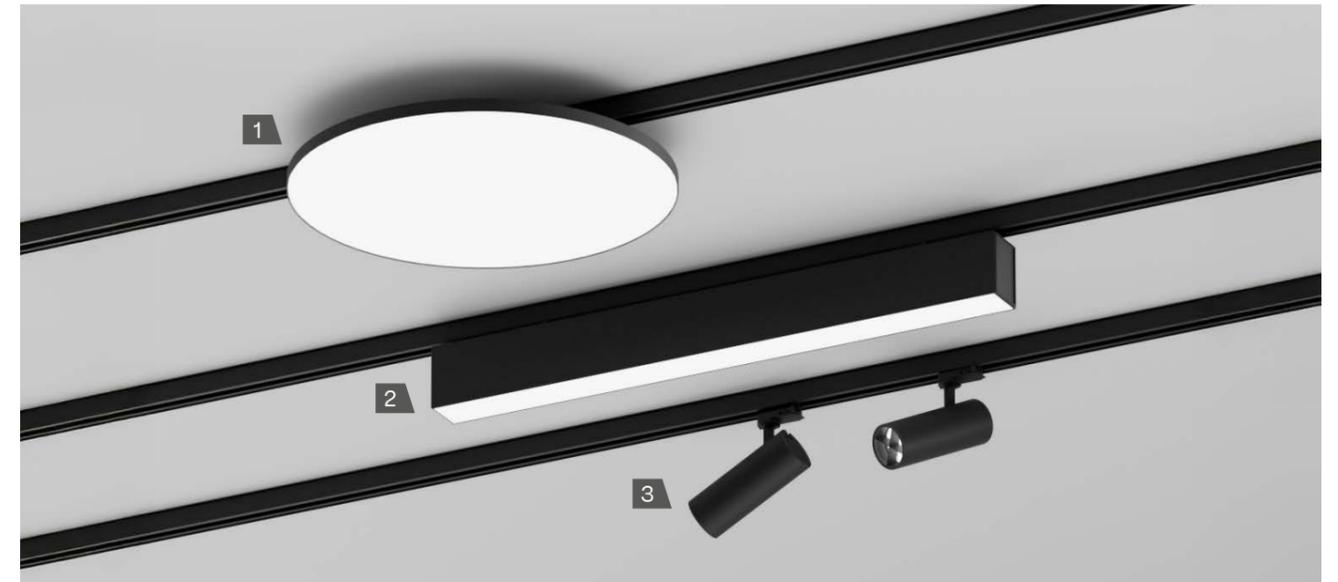


1. LUMINAIRES

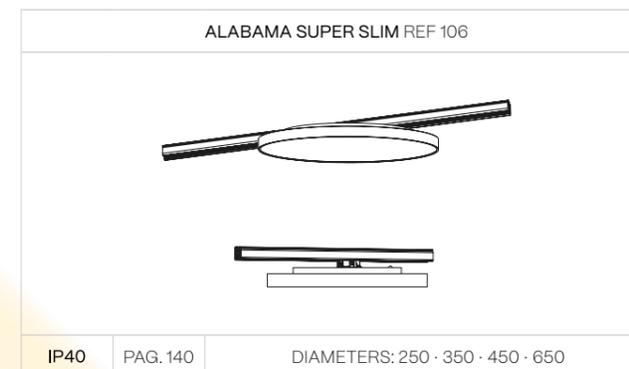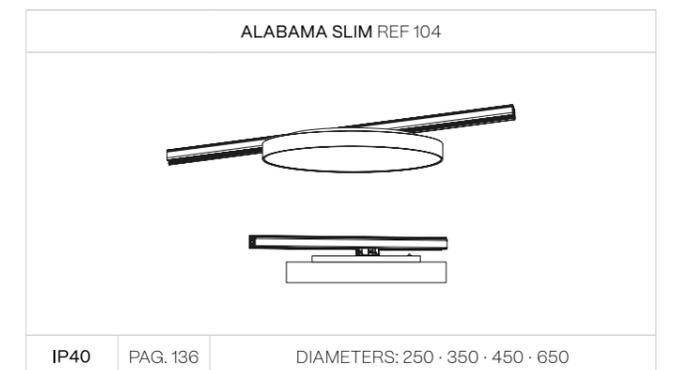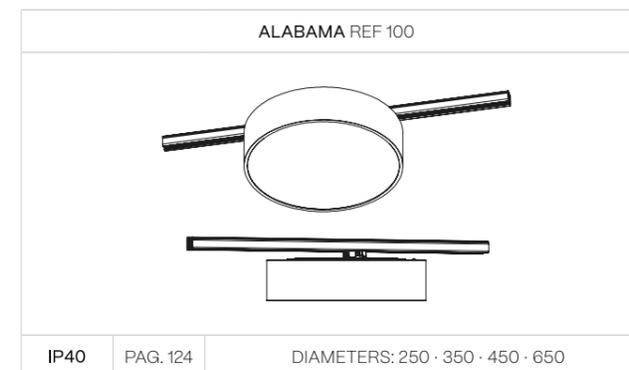





For technical data, other installations and general information, see the page below each product.

LIGHT MODULES

2. LINEAR SYSTEM

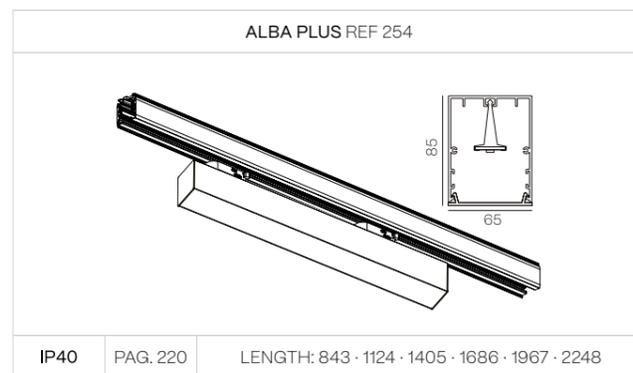










3. SPOTLIGHTS

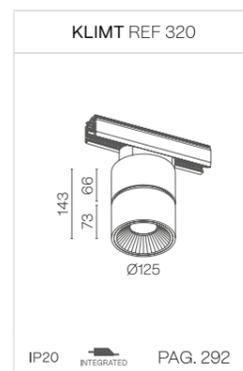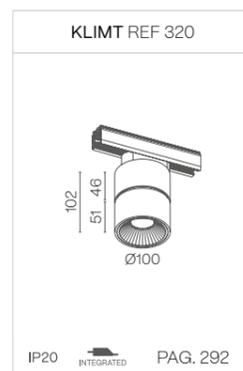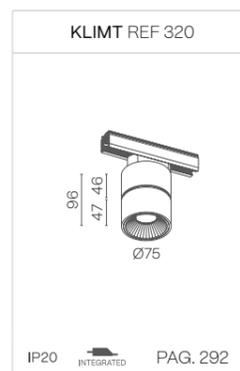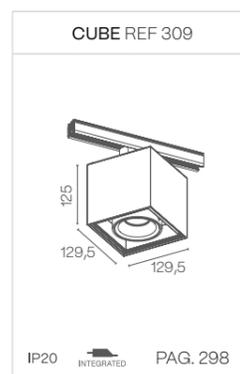

For technical data, other installations and general information, see the page below each product.

LIGHT MODULES


3. SPOTLIGHTS

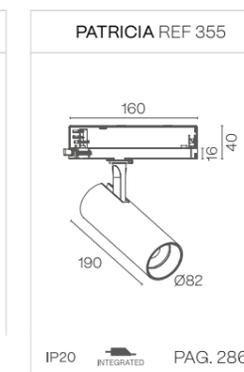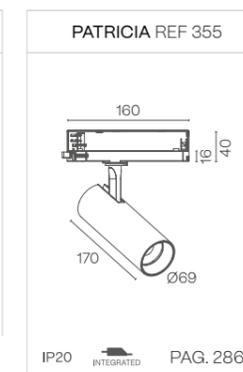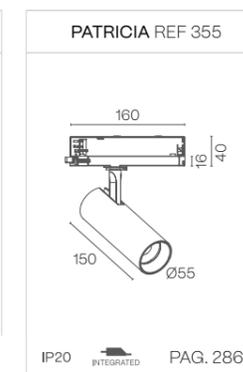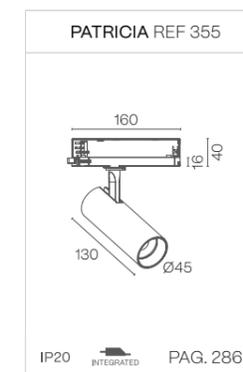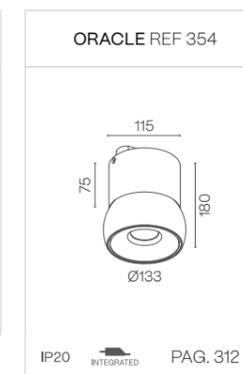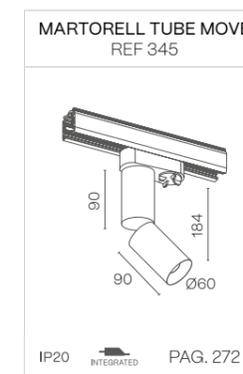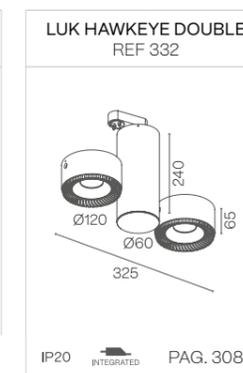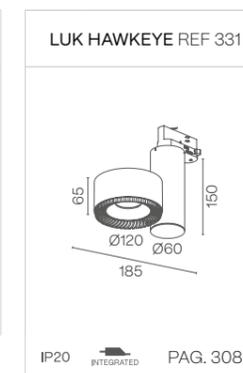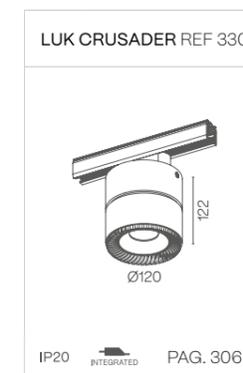


For technical data, other installations and general information, see the page below each product.

PROFILES & COMPONENTS

SURFACE

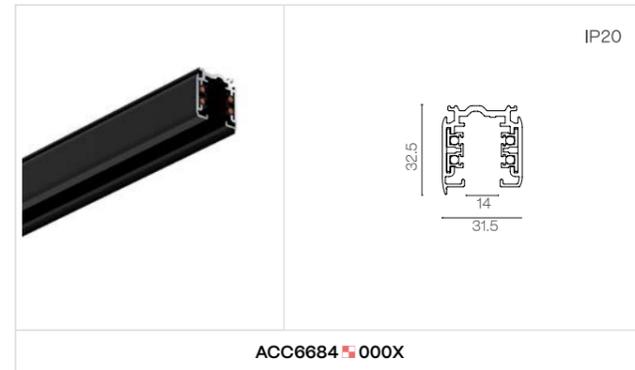


RECESSED WITH FRAME

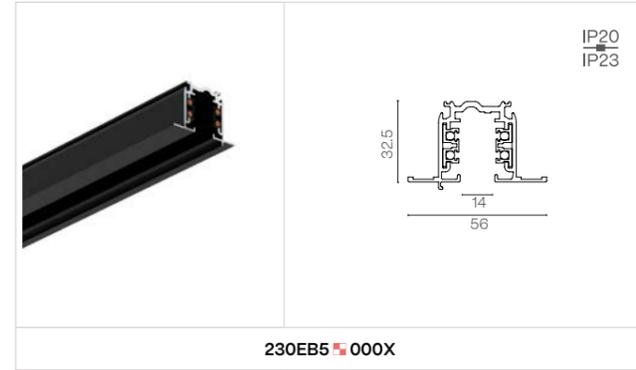

Add pendant mounting to track profile ACC6684.01.SR & ACC6684.02.SR with accessories ACC6666 + ACC6665.

JOINTS & CONNECTORS

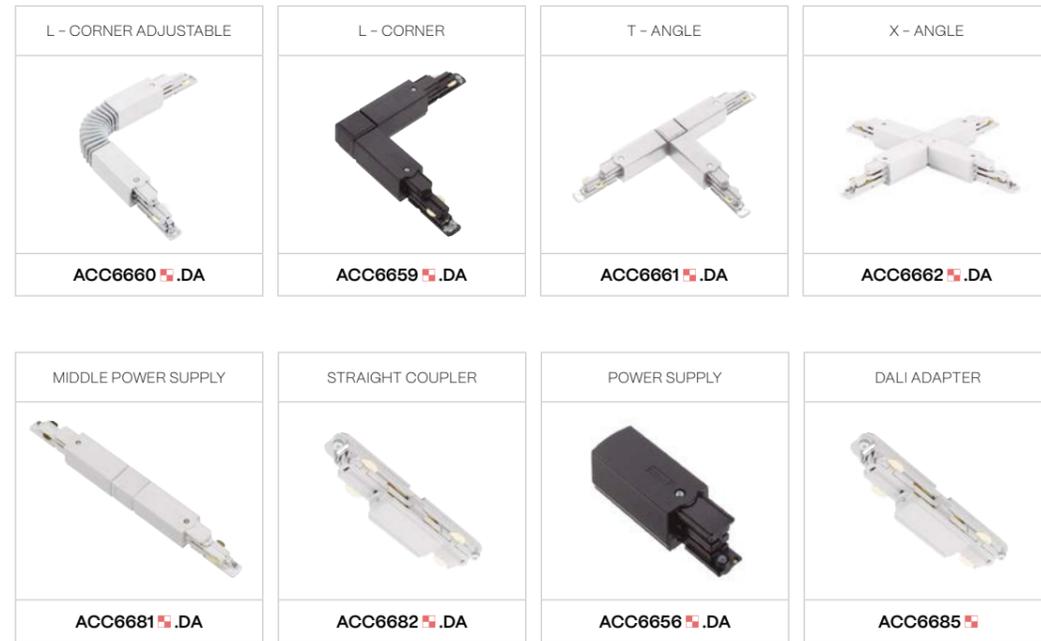


When the track is supplied with DALI regulation, it features a 6-circuit system: four dedicated to copper conduction and two for data transmission.


- FINISH**
- B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
- Special finishes
 - Custom dimensions

COMPONENTS

GENERAL COMPONENTS

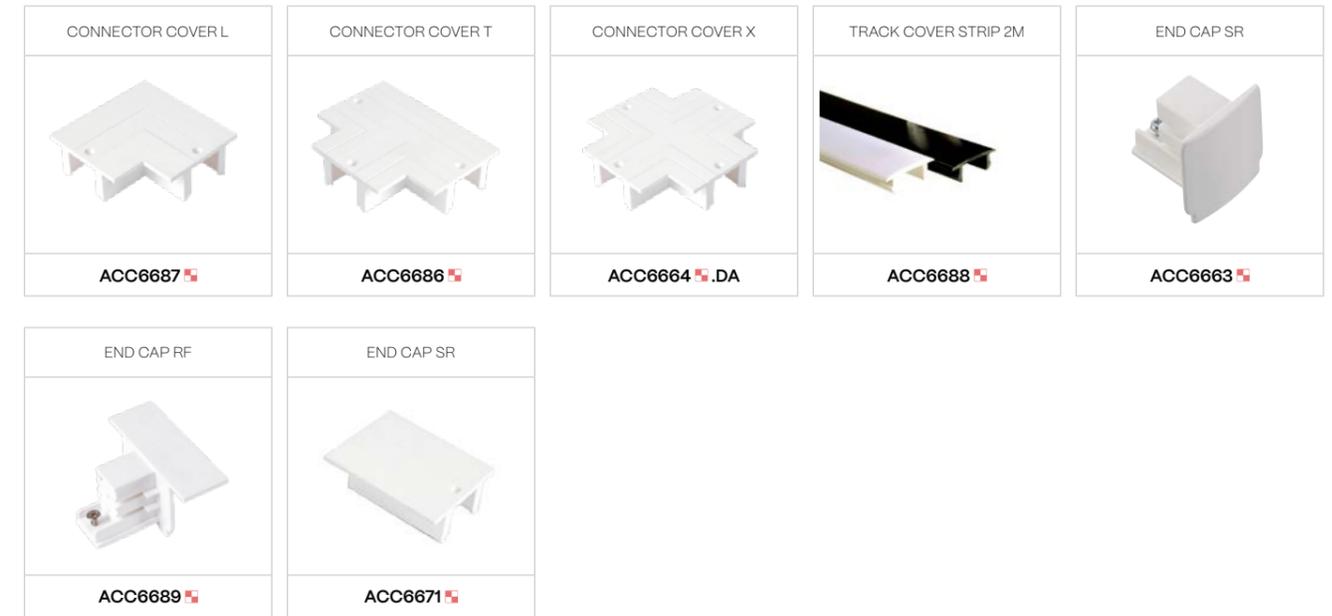

PENDANT COMPONENTS

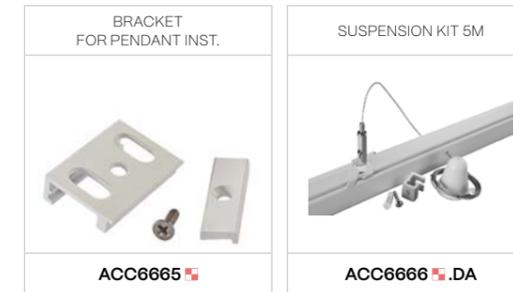


OTHER COMPONENTS




- FINISH**
- B · Black
 - W · White
 - S · Special color


ALBA FAMILY




ALBA MINI
REF. 251
PAG. 196

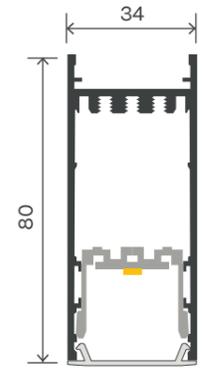


ALBA MINI AIO
REF. 253
PAG. 200

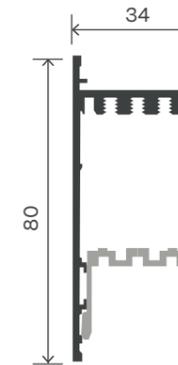


ALBA MINI MODULIGHT
REF. 280
PAG. 204

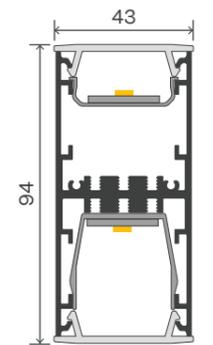


ALBA DOUBLE
REF. 250
PAG. 224

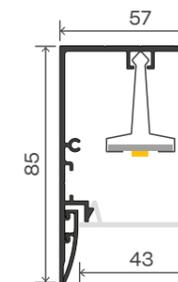


ALBA WING
REF. 290
PAG. 210




ALBA PRO
REF. 255
PAG. 214

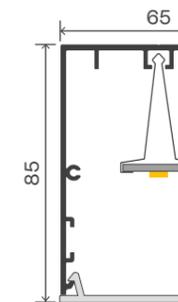

ALBA PLUS
REF. 254
PAG. 220



ALBA LINGGO MINI
REF. 276
PAG. 228



ALBA LINGGO
REF. 275
PAG. 232

LINEAR SYSTEM MEASURES

The following lengths are available and can be applied generically across all product lines: **0M, 1, 1M, 2, 2M, 3, 3M, 4, 4M, 5, 5M, 6, 6M, 7, 7M, 8, 8M, 9, 9M and 10.**

These lengths correspond to the sizes of the light boards, available in two versions: 140 mm and 280 mm. Wattage and lumen values are defined per board, ensuring consistent luminous performance and energy efficiency across the entire range.

Thanks to this modular system, all lengths are fully compatible and can be used interchangeably across the following models: ALBA PRO, ALBA PLUS, ALBA MINI, ALBA MINI AIO, ALBA MINI MODULIGHT, ALBA WING, ALBA PRO, ALBA PLUS, ALBA DOUBLE, ALBA LINGGO MINI, ALBA LINGGO and ALZIRA.

By using the latest **LED technologies** in the boards, an **extended lifetime of up to 102,000 hours (L80B10)** has been achieved, representing a significant improvement over previous generations. This ensures long-term luminous stability and reduced maintenance over time. In addition, **luminous efficacy** has been increased up to **180 lm/W**, achieving an energy **efficiency class C.**

As a result of this technical evolution, the range offers a more **robust, durable and versatile solution**, capable of meeting the most demanding requirements of architectural projects and continuous lighting applications.


Our strong commitment to sustainable materials, together with the **C2C certification** of the boards and improved performance, makes our **luminaires a safe and environmentally responsible choice.**

REF.	ELECTRIC SYSTEM LENGTH	POWER STANDARD			POWER HIGH				
		W	27K	3K	4K	W	27K	3K	4K
A	141 mm	3	409	484	521,5	6	818	969	1043
B	281 mm	6	818	969	1043	11	1636	1938	2086
C	422 mm	8	1227	1453	1564	17	2454	2907	3129
D	562 mm	11	1636	1938	2086	22	3372	3876	4172
G	703 mm	14	2045	2422	2607	28	4090	4845	5215
H	843 mm	17	2454	2907	3129	33	4908	5814	6258
I	984 mm	20	2863	3391,5	3650,5	39	5726	6783	7301
J	1124 mm	22	3272	3876	4172	45	6544	7752	8344
K	1265 mm	25	3681	4360	4693	50	7362	8721	9387
L	1405 mm	28	4090	4845	5215	56	8180	9690	10430
M	1546 mm	31	4499	5329	5736	61	8998	10659	11473
N	1686 mm	33	4908	5814	6258	67	9816	11628	12516
O	1827 mm	36	5317	6298	6779	72	10634	12597	13559
P	1967 mm	39	5726	6783	7301	78	11452	13566	14602
Q	2108 mm	42	6135	7267	7822	84	12270	14535	15645
R	2248 mm	45	6544	7752	8344	89	13088	15504	16688
S	2389 mm	47	6953	8236	8865	95	13906	16473	17731
T	2529 mm	50	7362	8721	9387	100	14724	17442	18774
U	2670 mm	53	7771	9205	9908	106	15542	18411	19817
V	2810 mm	56	8180	9690	10430	111	16360	19380	20860

LINEAR SYSTEM MEASURES

EXAMPLE

The following example shows how to calculate the total length of a luminaire, combining the electrical system length with the dimensions of the end caps and cover kit.

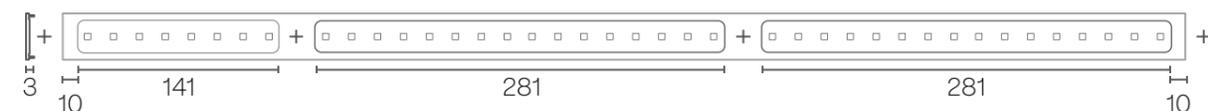

Total length = 141 + 281 + 281 mm (Electric System Length) + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit) = **729 mm**

Total lumens at 2700 K – Power Standard: 409 lm + 818 lm + 818 lm = **2045 lm**

Total power – Power Standard: 3 W + 6 W + 6 W = **15 W**

Generic reference = **XXX X G % X X X X**

Alba mini reference = **211 E G 1 B 3 4 3 D**

LENGTH CALCULATION FORMULA

The total length of each luminaire varies depending on the model. The following formulas indicate how to calculate the overall length, taking into account the electrical system, end caps, and cover kit.

ALBA MINI

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA MINI AIO

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA MINI MODULIGHT

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA WING

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 10 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 10 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA PRO

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA PLUS

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAM: Total length = Electrical system length + 10 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 10 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA DOUBLE

PENDANT / WALL SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

ALBA LINGGO MINI

PENDANT / SURFACE: Total length = Electrical system length + 2 x 14 mm (Ends) + 2 x 9 mm (Cover Kit)

ALBA LINGGO

PENDANT / SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 12 mm (Cover Kit)


ALZIRA

PENDANT: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)



ALBA MINI


NEW

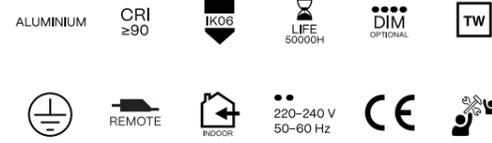


INSTALLATION




1. PENDANT

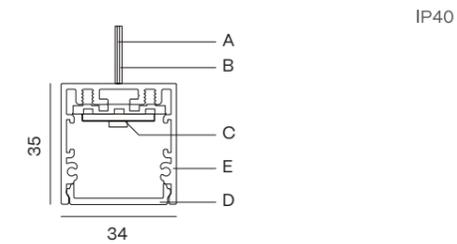


2. SURFACE

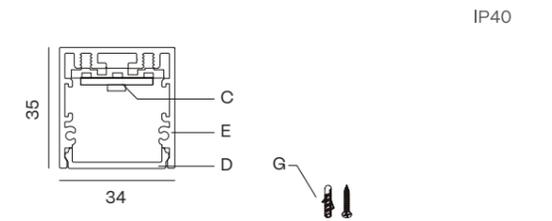


3. RECESSED WITH FRAME

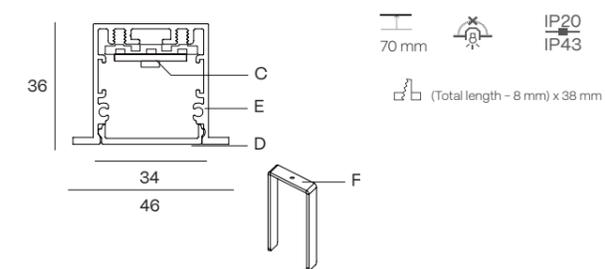

4. TRIMLESS

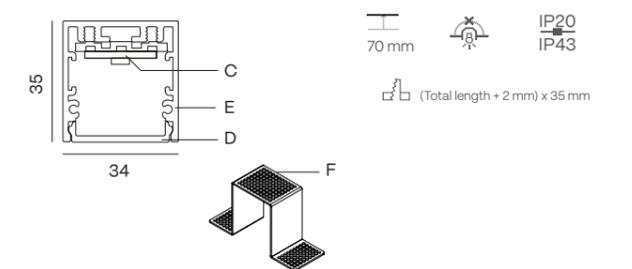

5. WALL SURFACE

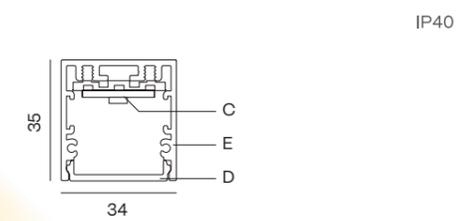

Compatible only with electric system lengths (mm): 281 · 422 · 562
See page 194
Example: **251EB2** **112**


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser


E - Aluminium profile
F - Mounting kit

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material


COMPONENTS

COVER KIT	REFERENCE
	TF03  2 x 2 mm

BOXES FOR PENDANT - Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NoN-DIMM	REFERENCE	DRIVER BOX DIMMABLE	REFERENCE
	CB09.12 		CB09.32 		CB09.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		60 mm	SC21.60 
	7 m	SC07.SA		80 mm	SC21.80 
	10 m	SC10.SA		100 mm	SC100.60 

JOINTS

LINEAR JOINT	ANGLE JOINT	T - JOINT	T - JOINT
			
UR03	UL03 	UT03 	UC03 

INSTALLATION 1 · Pendant 2 · Pendant up light 3 · Surface 5 · Recessed with frame 6 · Trimless	FINISH B · Black W · White S · Special color	ON DEMAND OPTIONS  Special finishes  Special color temperatures  Motion detection  Emergency lighting  Hi power  Wireless control options  CRI 80  Custom dimensions
--	--	---

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248	
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm	10 W 1034 - 1054 - 1107 lm	12 W 1243 - 1268 - 1331 lm	14 W 1460 - 1490 - 1564 lm	
		500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
		Opal	2700 K	251EH  112 	251EJ  112 	251EL  112 	251EN  112 	251EP  112 
3000 K	251EH  113 		251EJ  113 	251EL  113 	251EN  113 	251EP  113 	251ER  113 	
4000 K	251EH  115 		251EJ  115 	251EL  115 	251EN  115 	251EP  115 	251ER  115 	
Microprismatic	2700 K	251EH  122 	251EJ  122 	251EL  122 	251EN  122 	251EP  122 	251ER  122 	
	3000 K	251EH  123 	251EJ  123 	251EL  123 	251EN  123 	251EP  123 	251ER  123 	
	4000 K	251EH  125 	251EJ  125 	251EL  125 	251EN  125 	251EP  125 	251ER  125 	

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 - 683 - 722 lm	12 W 1007 - 1069 - 1131 lm	16 W 1334 - 1417 - 1500 lm	20 W 1674 - 1777 - 1881 lm	24 W 2014 - 2138 - 2263 lm	28 W 2366 - 2512 - 2658 lm
		500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm
Opal	2700 K	251EH  312 	251EJ  312 	251EL  312 	251EN  312 	251EP  312 	251ER  312 
	3000 K	251EH  313 	251EJ  313 	251EL  313 	251EN  313 	251EP  313 	251ER  313 
	4000 K	251EH  315 	251EJ  315 	251EL  315 	251EN  315 	251EP  315 	251ER  315 
Microprismatic	2700 K	251EH  322 	251EJ  322 	251EL  322 	251EN  322 	251EP  322 	251ER  322 
	3000 K	251EH  323 	251EJ  323 	251EL  323 	251EN  323 	251EP  323 	251ER  323 
	4000 K	251EH  325 	251EJ  325 	251EL  325 	251EN  325 	251EP  325 	251ER  325 

The ALBA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

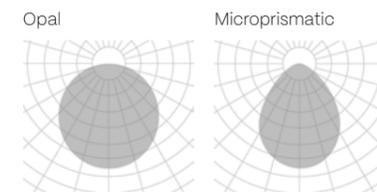

The data shown corresponds to raw values.

INSTALLATION 1 · Pendant 2 · Pendant up light 3 · Surface 5 · Recessed with frame 6 · Trimless 7 · Wall surface	FINISH B · Black W · White S · Special color	DIMM OPTIONS O · On-Off D · Dali P · Push V · 1.10v	 Up light  Down light
--	--	--	--

ALBA MINI AIO

NEW


- ALUMINIUM
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION




1. PENDANT

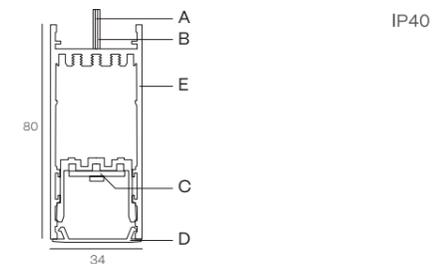


2. SURFACE

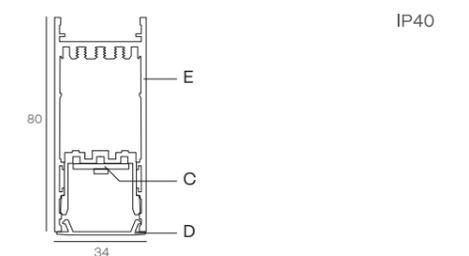


3. RECESSED WITH FRAME

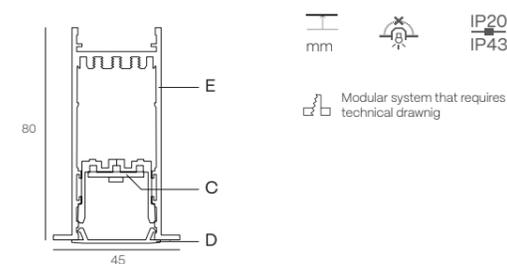

4. TRIMLESS

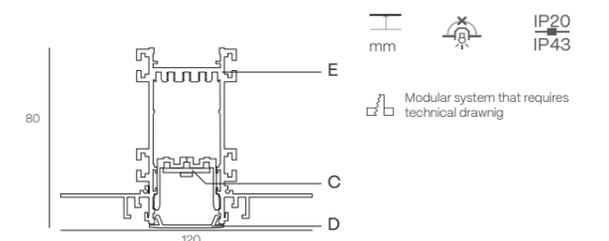

5. WALL SURFACE

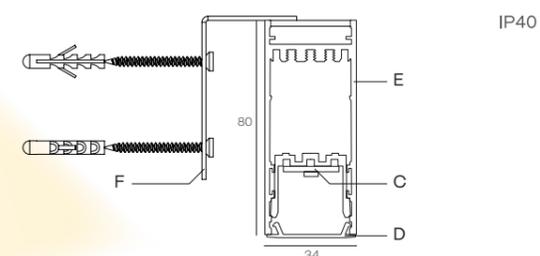

Compatible only with electric system lengths (mm): 281 · 422 · 562
See page 194
Example: **253EB2** **112**


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser


- E - Aluminium profile
- F - Mounting kit

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

COVER KIT	REFERENCE
	TF23  2 x 3 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

JOINTS

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT	T - JOINT	CROSS JOINT
				
UR23 	UL23 	UV23 	UT23 	UC23 

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame

FINISH

- 6 · Trimless
- 7 · Wall surface
- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS

-  Special finishes
-  Custom dimensions
-  **TW** Tunable white
-  **EXIT** Emergency lighting
-  Motion detection
-  Up light

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	253EH  112 	253EJ  112 	253EL  112 	253EN  112 	253EP  112 	253ER  112 
	3000 K	253EH  113 	253EJ  113 	253EL  113 	253EN  113 	253EP  113 	253ER  113 
	4000 K	253EH  115 	253EJ  115 	253EL  115 	253EN  115 	253EP  115 	253ER  115 
Microprismatic	2700 K	253EH  122 	253EJ  122 	253EL  122 	253EN  122 	253EP  122 	253ER  122 
	3000 K	253EH  123 	253EJ  123 	253EL  123 	253EN  123 	253EP  123 	253ER  123 
	4000 K	253EH  125 	253EJ  125 	253EL  125 	253EN  125 	253EP  125 	253ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 4908 – 5814 – 6258 lm	45 W 6544 – 7752 – 8344 lm	56 W 8180 – 9690 – 10430 lm	67 W 9816 – 11628 – 12516 lm	78 W 11452 – 13566 – 14602 lm	89 W 13088 – 15504 – 16688 lm
Opal	2700 K	253EH  312 	253EJ  312 	253EL  312 	253EN  312 	253EP  312 	253ER  312 
	3000 K	253EH  313 	253EJ  313 	253EL  313 	253EN  313 	253EP  313 	253ER  313 
	4000 K	253EH  315 	253EJ  315 	253EL  315 	253EN  315 	253EP  315 	253ER  315 
Microprismatic	2700 K	253EH  322 	253EJ  322 	253EL  322 	253EN  322 	253EP  322 	253ER  322 
	3000 K	253EH  323 	253EJ  323 	253EL  323 	253EN  323 	253EP  323 	253ER  323 
	4000 K	253EH  325 	253EJ  325 	253EL  325 	253EN  325 	253EP  325 	253ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

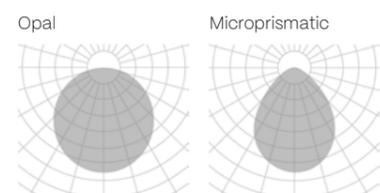

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame

FINISH


- 6 · Trimless
- 7 · Wall surface
- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

-  Up light
-  Down light

ALBA MINI MODULIGHT


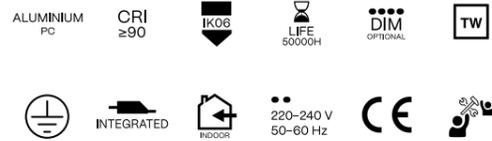


LIGHT MODULES

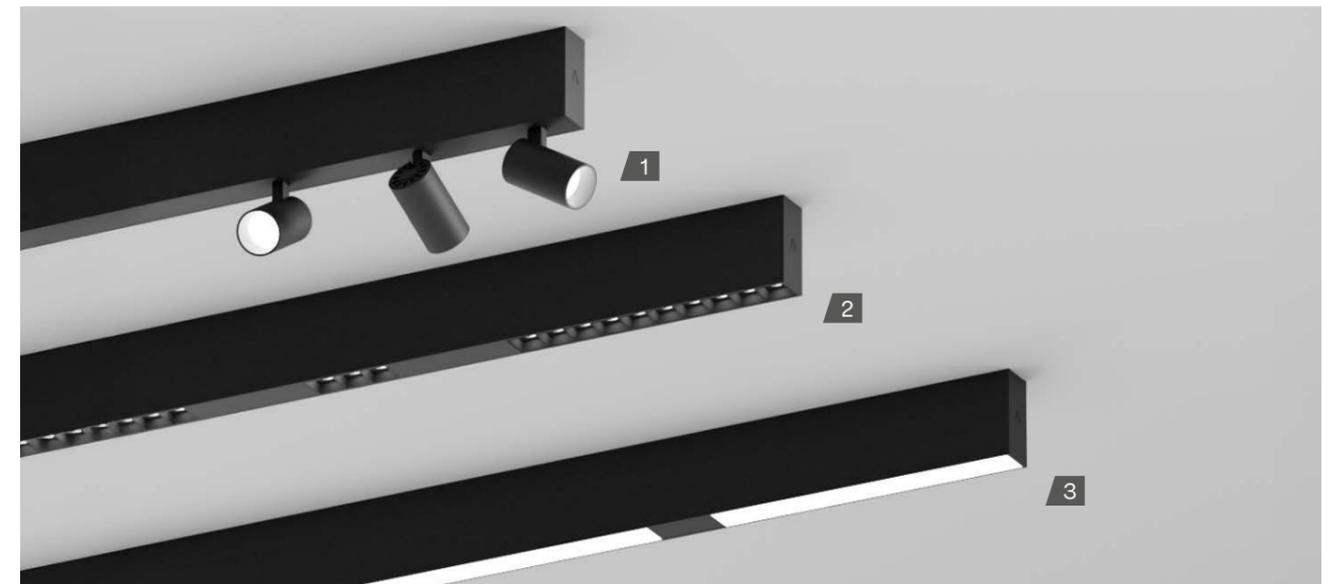


1. MINI TUBE

IP40
350°
90°



	700 mA	6 W 886 - 898 - 939 lm	6 W 886 - 898 - 939 lm
15°	2700 K	283EB9 122	283EE9 122
	3000 K	283EB9 123	283EE9 123
	4000 K	283EB9 125	283EE9 125
24°	2700 K	283EB9 142	283EE9 142
	3000 K	283EB9 143	283EE9 143
	4000 K	283EB9 145	283EE9 145
38°	2700 K	283EB9 152	283EE9 152
	3000 K	283EB9 153	283EE9 153
	4000 K	283EB9 155	283EE9 155

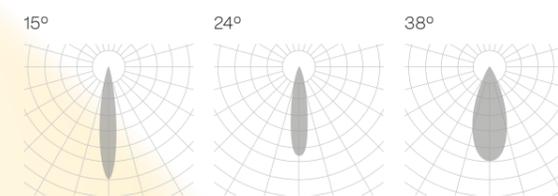

The data shown corresponds to raw values.

FINISH

- B · Black
- W · White

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v


Down light

LIGHT MODULES

2. LENSES- Available with round or square trim

IP40

Dimension	29 mm	80 mm	133 mm	263 mm
700 mA	2 W 189 - 216 - 232 lm	6 W 566 - 647 - 697 lm	10 W 982 - 1079 - 1161 lm	20 W 1885 - 2158 - 2322 lm
20°	2700 K	28 □ EB9 ■ 132 ✖	28 □ EH9 ■ 132 ✖	28 □ EL9 ■ 132 ✖
	3000 K	28 □ EB9 ■ 133 ✖	28 □ EH9 ■ 133 ✖	28 □ EL9 ■ 133 ✖
	4000 K	28 □ EB9 ■ 135 ✖	28 □ EH9 ■ 135 ✖	28 □ EL9 ■ 135 ✖
40°	2700 K	28 □ EB9 ■ 152 ✖	28 □ EH9 ■ 152 ✖	28 □ EL9 ■ 152 ✖
	3000 K	28 □ EB9 ■ 152 ✖	28 □ EH9 ■ 152 ✖	28 □ EL9 ■ 152 ✖
	4000 K	28 □ EB9 ■ 152 ✖	28 □ EH9 ■ 152 ✖	28 □ EL9 ■ 152 ✖
60°	2700 K	28 □ EB9 ■ 172 ✖	28 □ EH9 ■ 172 ✖	28 □ EL9 ■ 172 ✖
	3000 K	28 □ EB9 ■ 172 ✖	28 □ EH9 ■ 172 ✖	28 □ EL9 ■ 172 ✖
	4000 K	28 □ EB9 ■ 172 ✖	28 □ EH9 ■ 172 ✖	28 □ EL9 ■ 172 ✖

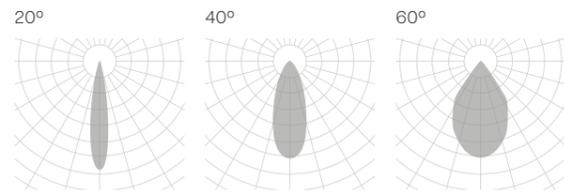

The data shown corresponds to raw values.

- | | | | |
|-----------------|-------------------|---------------------|------------|
| FINISH | FINISH | DIMM OPTIONS | Down light |
| 2 · Round trim | B · Black | O · On-Off | |
| 4 · Square trim | W · White | D · Dali | |
| | S · Special color | P · Push | |

LIGHT MODULES


3. LED MODULES

IP40

Dimension	281 mm	562 mm	843 mm
700 mA	12 W 1120 - 1173 - 1225 lm	24 W 2240 - 2346 - 2450 lm	36 W 3360 - 3519 - 3675 lm
Opal	2700 K	281EB9 ■ 312O	281EE9 ■ 312O
	3000 K	281EB9 ■ 313O	281EE9 ■ 313O
	4000 K	281EB9 ■ 315O	281EE9 ■ 315O
Microprismatic	2700 K	281EB9 ■ 322O	281EE9 ■ 322O
	3000 K	281EB9 ■ 323O	281EE9 ■ 323O
	4000 K	281EB9 ■ 325O	281EE9 ■ 325O

IP40

Dimension	1124 mm	1405 mm	1686 mm
700 mA	48 W 4480 - 4692 - 4900 lm	60 W 5600 - 5865 - 6125 lm	72 W 6720 - 7038 - 7350 lm
Opal	2700 K	281EJ9 ■ 312O	281EL9 ■ 312O
	3000 K	281EJ9 ■ 313O	281EL9 ■ 313O
	4000 K	281EJ9 ■ 315O	281EL9 ■ 315O
Microprismatic	2700 K	281EJ9 ■ 322O	281EL9 ■ 322O
	3000 K	281EJ9 ■ 323O	281EL9 ■ 323O
	4000 K	281EJ9 ■ 325O	281EL9 ■ 325O

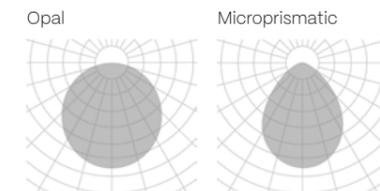


The data shown corresponds to raw values.


- | | |
|-------------------|------------|
| FINISH | Down light |
| B · Black | |
| W · White | |
| S · Special color | |

PROFILES


PENDANT

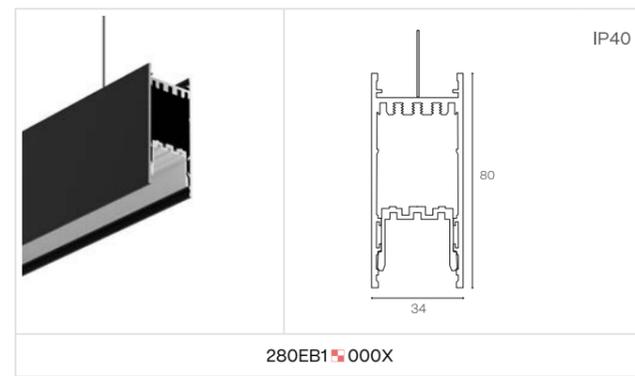


SURFACE

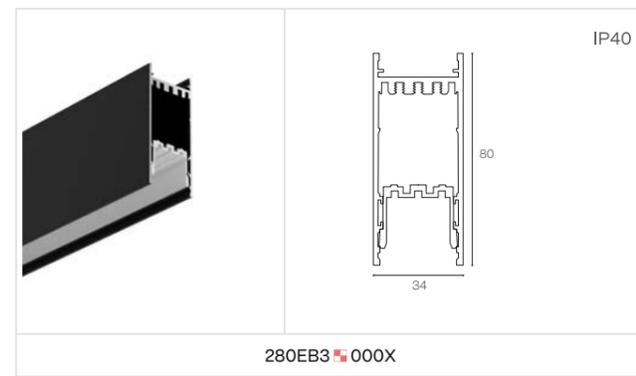

RECESSED WITH FRAME

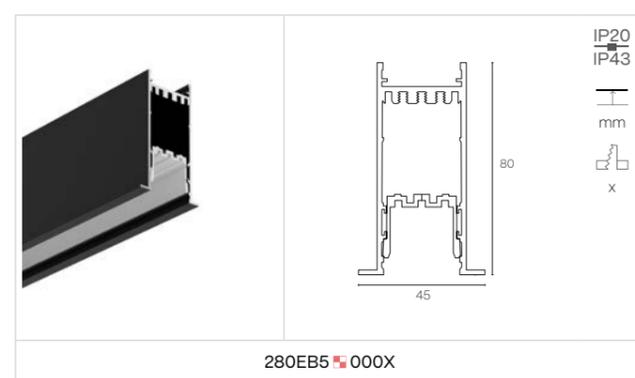


TRIMLESS

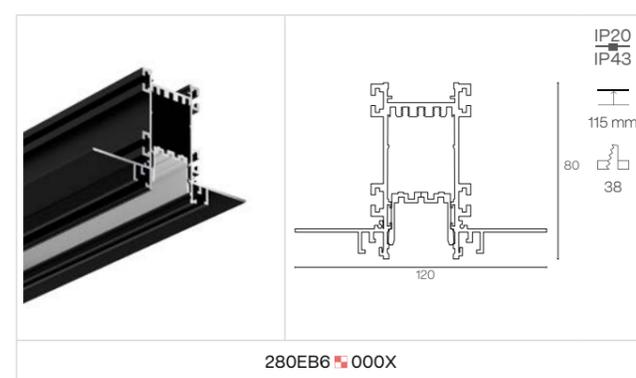

Total length = profile length + 2 x 2 mm (cover kit)
 (Total length + 2 mm) x 30 mm

Total length = profile length + 2 x 2 mm (cover kit)
 (Total length + 2 mm) x 30 mm

WALL SURFACE

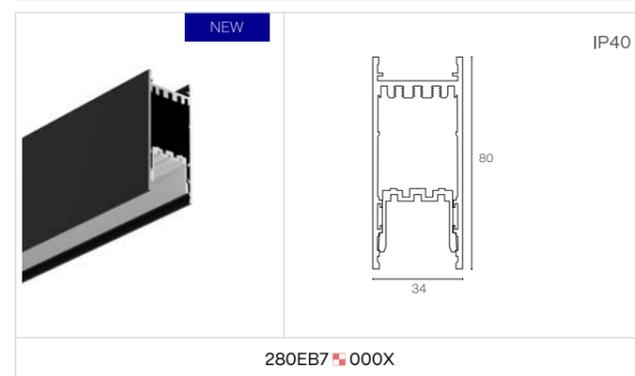


FINISH
B · Black
W · White
S · Special color

ON DEMAND OPTIONS

- Special finishes
- Custom dimensions
- Tunable white
- Emergency lighting
- Motion detection
- Up light


COMPONENTS

GENERAL COMPONENTS



DIMENSION		DRIVER
.01	0 – 15 W	DR10210.01
.02	16 – 30 W	DR10210.02
.03	31 – 65 W	DR10210.03
.04	66 – 90 W	DR10210.04

BOXES FOR PENDANT – Not included, please select

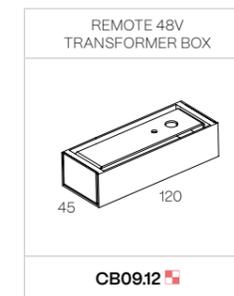

JOINTS



INSTALLATION

- 1 · Pendant
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless


FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v


ALBA WING

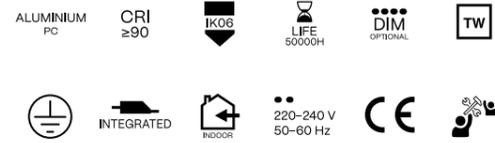


INSTALLATION




1. PENDANT

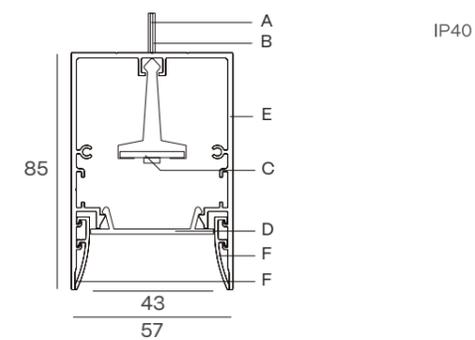


2. SURFACE

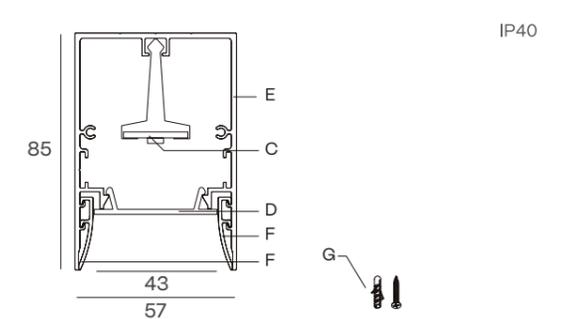

3. RECESSED WITH FRAME

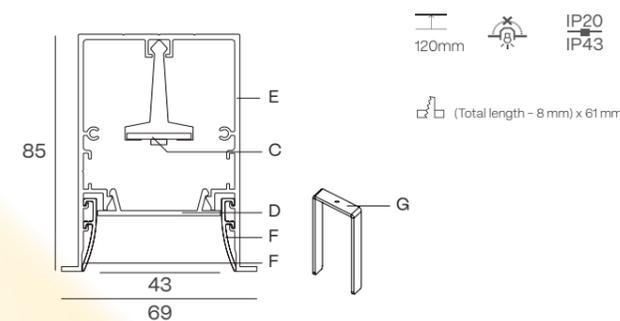

4. TRIMLESS

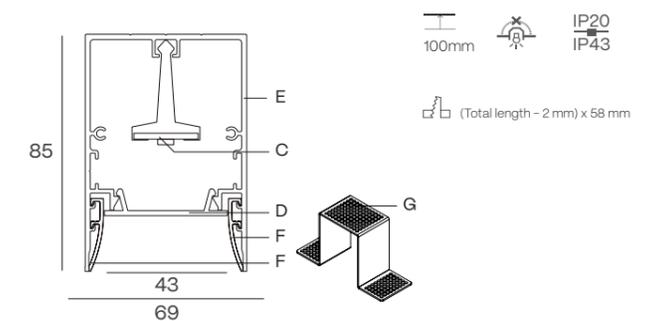

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A - Aircraft Cable (3 m)
B - Power cable
C - LED module
D - Diffuser


E - Aluminium profile
F - Paintable bezel
G - Mounting Kit

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material



COMPONENTS

COVER KIT	REFERENCE
	TF13  2 x 3 mm

BOXES FOR PENDANT Not included, please select

CONNECTION BOX	REFERENCE
 45 120	CB09.12 

OTHER PENDANT OPTIONS

2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60 		5 m	SC05.SA
	80 mm	SC21.80 		7 m	SC07.SA
	100 mm	SC100.60 		10 m	SC10.SA

JOINTS

LINEAR JOINT

UR03

INSTALLATION	FINISH	ON DEMAND OPTIONS
<ul style="list-style-type: none"> 1 · Pendant 3 · Surface 5 · Recessed with frame 6 · Trimless 	<ul style="list-style-type: none"> B · Black W · White S · Special color 	<ul style="list-style-type: none">  Special finishes  Special color temperatures  RGB  Emergency lighting  Motion detection  Wireless control options  CRI 80

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm	10 W 1034 - 1054 - 1107 lm	12 W 1243 - 1268 - 1331 lm	14 W 1460 - 1490 - 1564 lm
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	290EH  112 	290EJ  112 	290EL  112 	290EN  112 	290EP  112 	290ER  112 
	3000 K	290EH  113 	290EJ  113 	290EL  113 	290EN  113 	290EP  113 	290ER  113 
	4000 K	290EH  115 	290EJ  115 	290EL  115 	290EN  115 	290EP  115 	290ER  115 
Microprismatic	2700 K	290EH  122 	290EJ  122 	290EL  122 	290EN  122 	290EP  122 	290ER  122 
	3000 K	290EH  123 	290EJ  123 	290EL  123 	290EN  123 	290EP  123 	290ER  123 
	4000 K	290EH  125 	290EJ  125 	290EL  125 	290EN  125 	290EP  125 	290ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 - 683 - 722 lm	12 W 1007 - 1069 - 1131 lm	16 W 1334 - 1417 - 1500 lm	20 W 1674 - 1777 - 1881 lm	24 W 2014 - 2138 - 2263 lm	28 W 2366 - 2512 - 2658 lm
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
Opal	2700 K	290EH  312 	290EJ  312 	290EL  312 	290EN  312 	290EP  312 	290ER  312 
	3000 K	290EH  313 	290EJ  313 	290EL  313 	290EN  313 	290EP  313 	290ER  313 
	4000 K	290EH  315 	290EJ  315 	290EL  315 	290EN  315 	290EP  315 	290ER  315 
Microprismatic	2700 K	290EH  322 	290EJ  322 	290EL  322 	290EN  322 	290EP  322 	290ER  322 
	3000 K	290EH  323 	290EJ  323 	290EL  323 	290EN  323 	290EP  323 	290ER  323 
	4000 K	290EH  325 	290EJ  325 	290EL  325 	290EN  325 	290EP  325 	290ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

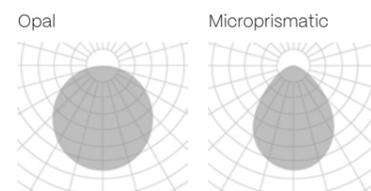


The data shown corresponds to raw values.


INSTALLATION	FINISH	DIMM OPTIONS	 Up light
<ul style="list-style-type: none"> 1 · Pendant 2 · Pendant up light 3 · Surface 5 · Recessed with frame 6 · Trimless 	<ul style="list-style-type: none"> B · Black W · White S · Special color 	<ul style="list-style-type: none"> O · On-Off D · Dali P · Push V · 1.10v 	 Down light

ALBA PRO

NEW

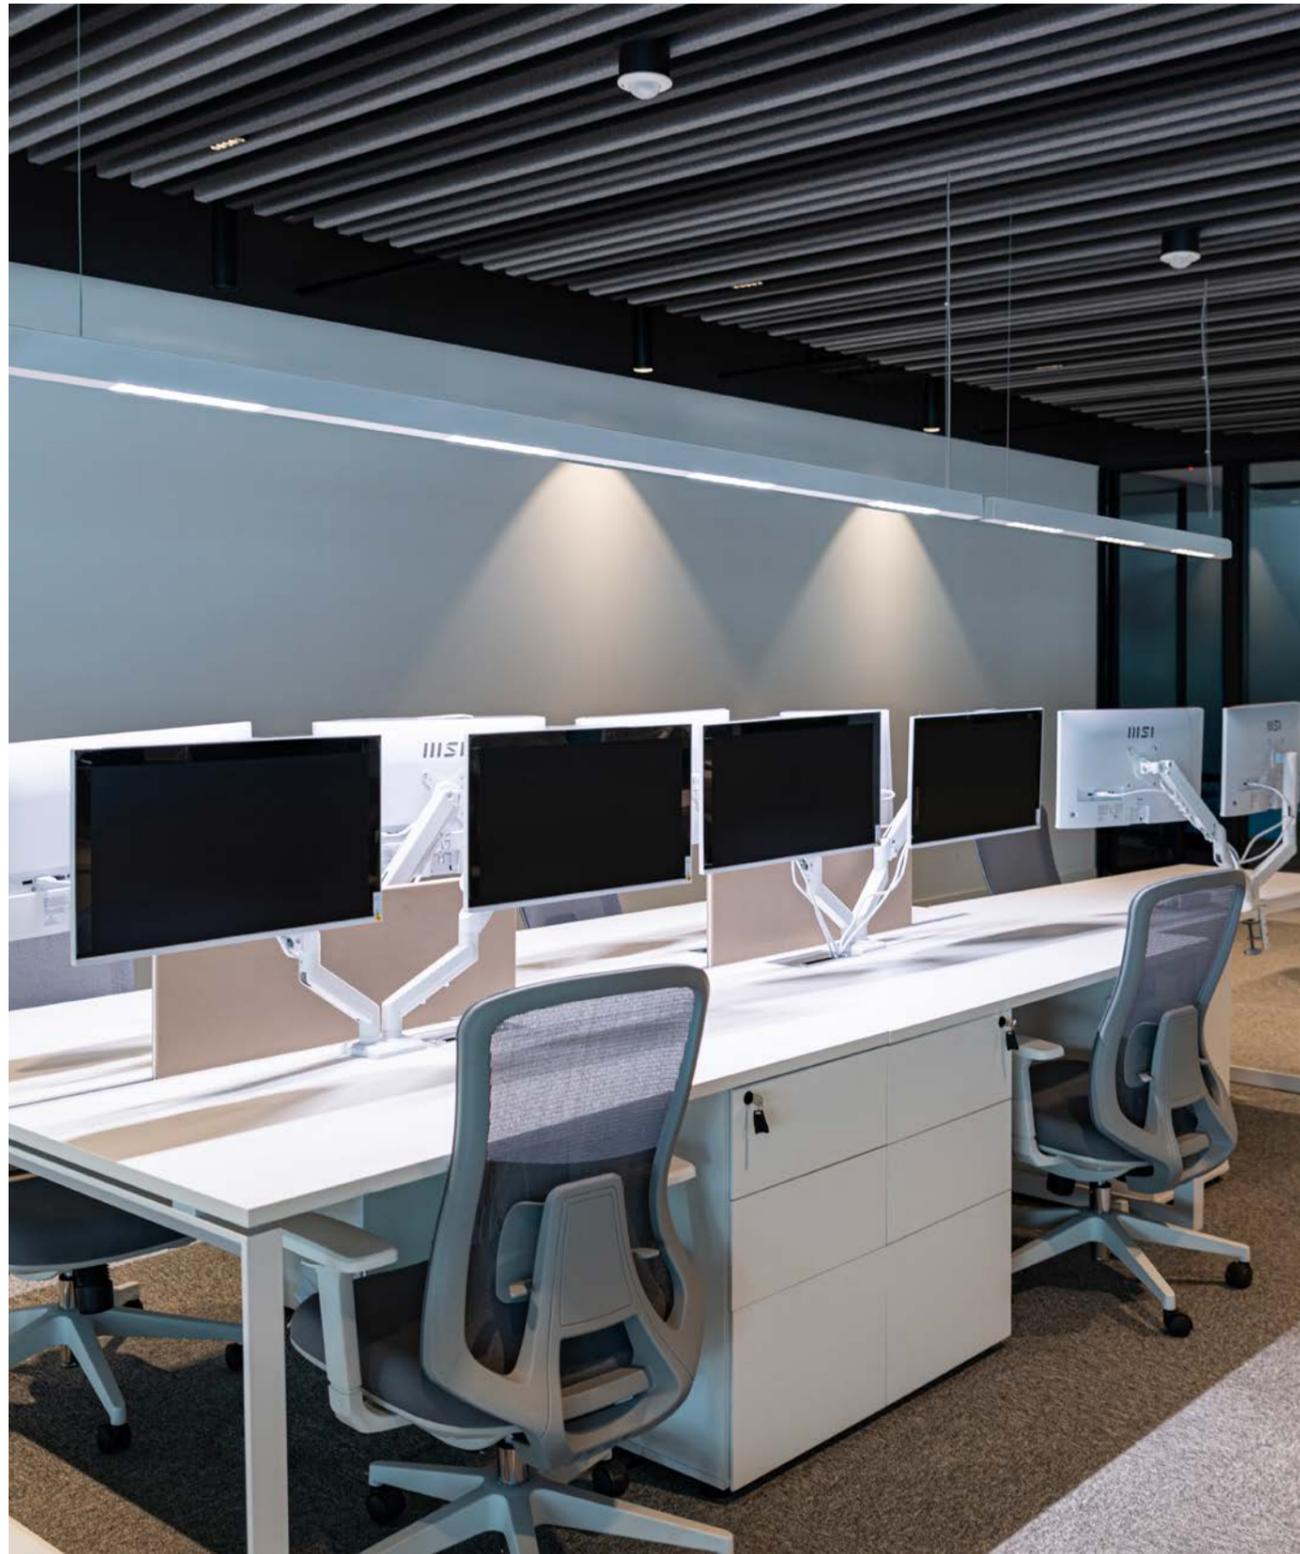


LIGHT MODULES - Configurable luminaire

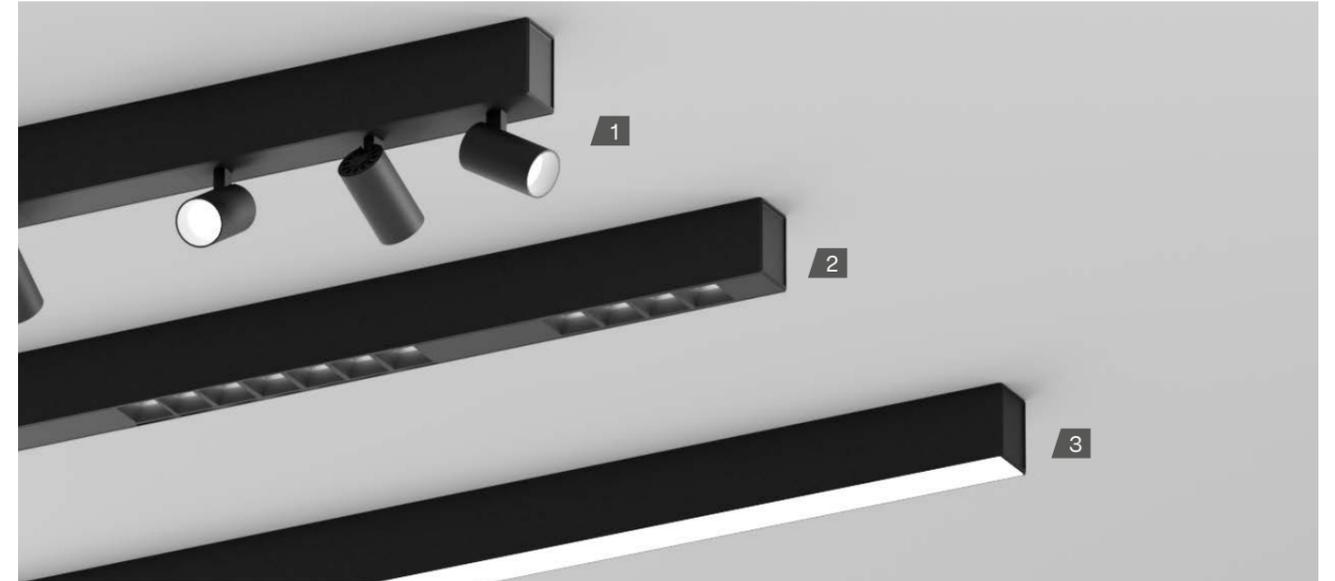

1. SPOTLIGHT


IP40
350°
90°




		POWER STANDARD	POWER HIGH
15°	700 mA	6 W 878 - 889 - 930 lm	6 W 886 - 898 - 939 lm
	2700 K	260EX9 122X	260EX9 322X
	3000 K	260EX9 123X	260EX9 323X
24°	4000 K	260EX9 125X	260EX9 325X
	2700 K	260EX9 132X	260EX9 332X
	3000 K	260EX9 133X	260EX9 333X
38°	4000 K	260EX9 135X	260EX9 335X
	2700 K	260EX9 152X	260EX9 352X
	3000 K	260EX9 153X	260EX9 353X
	4000 K	260EX9 155X	260EX9 355X

1. SPOTLIGHT STICK

IP40
350°
90°



		POWER STANDARD	POWER HIGH
15°	700 mA	6 W 878 - 889 - 930 lm	6 W 886 - 898 - 939 lm
	2700 K	261EX9 122X	261EX9 322X
	3000 K	261EX9 123X	261EX9 323X
24°	4000 K	261EX9 125X	261EX9 325X
	2700 K	261EX9 132X	261EX9 332X
	3000 K	261EX9 133X	261EX9 333X
38°	4000 K	261EX9 135X	261EX9 335X
	2700 K	261EX9 152X	261EX9 352X
	3000 K	261EX9 153X	261EX9 353X
	4000 K	261EX9 155X	261EX9 355X

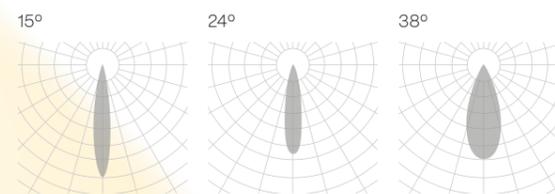

The data shown corresponds to raw values.

Down light

FINISH
B · Black
W · White

LIGHT MODULES – Configurable luminaire

2. MODULE LENSES – POWER STANDARD

IP40		29 mm	80 mm
Dimension			
65°	350 mA	4 W 575 – 600 – 625 lm	7 W 1000 – 1050 – 1055 lm
	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
90°	4000 K	257EX9 175X	258EX9 175X
	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
Asymmetric	4000 K	257EX9 175X	258EX9 175X
	2700 K	257EX9 142X	258EX9 142X
	3000 K	257EX9 143X	258EX9 143X
	4000 K	257EX9 155X	258EX9 155X

2. MODULE LENSES – POWER HIGH


IP40		29 mm	80 mm
Dimension			
65°	700 mA	8 W 1115 – 1165 – 1220 lm	14 W 1950 – 2040 – 2050 lm
	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
90°	4000 K	257EX9 375X	258EX9 375X
	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
Asymmetric	4000 K	257EX9 375X	258EX9 375X
	2700 K	257EX9 342X	258EX9 342X
	3000 K	257EX9 343X	258EX9 343X
	4000 K	257EX9 355X	258EX9 355X

3. MODULE LIGHT – POWER STANDARD

IP40		Opal	Microprismatic
Dimension		280 mm	280 mm
Power standard	700 mA	8 W 1178 – 1388 – 1493 lm	8 W 1178 – 1388 – 1493 lm
	2700 K	259EX9W112X	259EX9W122X
	3000 K	259EX9W113X	259EX9W123X
	4000 K	259EX9W115X	259EX9W125X

3. MODULE LIGHT – POWER HIGH

IP40		Opal	Microprismatic
Dimension		280 mm	280 mm
Power high	700 mA	16 W 2213 – 2664 – 2866 lm	16 W 2213 – 2664 – 2866 lm
	2700 K	259EX9W312X	259EX9W322X
	3000 K	259EX9W313X	259EX9W323X
	4000 K	259EX9W315X	259EX9W325X

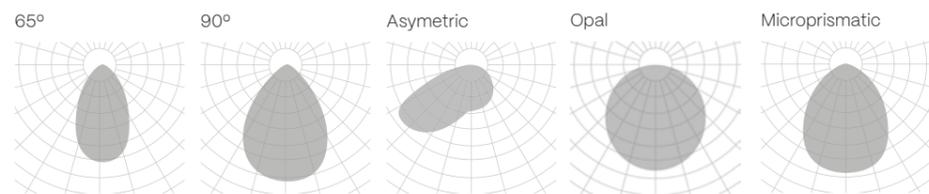

The data shown corresponds to raw values.

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Down light

PROFILES, UP LIGHT & COMPONENTS – Configurable luminaire

IP40
A255PB1XXX
A255PB2XXX

IP40
A255PB3XXX

IP20
IP43
A255PB5XXX

IP20
IP43
A255PB6XXX

IP40
A255PB7XXX

Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)
(Total length - 8 mm) x 51 mm

Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 2 mm (Cover Kit)
(Total length + 2 mm) x 65 mm

UP LIGHT

POWER STANDARD

Dimension	Opal		Microprismatic	
	280 mm	280 mm	280 mm	280 mm
700 mA	8 W	1178 – 1388 – 1493 lm	8 W	1178 – 1388 – 1493 lm
Power standard	2700 K	A255EB2STOX	A255EB2STMX	
	3000 K	A255EB3STOX	A255EB3STMX	
	4000 K	A255EB5STOX	A255EB5STMX	

POWER HIGH

Dimension	Opal		Microprismatic	
	280 mm	280 mm	280 mm	280 mm
700 mA	8 W	1178 – 1388 – 1493 lm	8 W	1178 – 1388 – 1493 lm
Power high	2700 K	A255EB2STOX	A255EB2STMX	
	3000 K	A255EB3STOX	A255EB3STMX	
	4000 K	A255EB5STOX	A255EB5STMX	

COMPONENTS

COVER KIT		OPAQUE
Pendant	A255CB1XXX	 A255PBXXXX
Surface	A255CB3XXX	
Recessed with frame	A255CB5XXX	
Trimless	A255CB6XXX	

ALBAPRO DRIVER FOR CUSTOM PRODUCT – POWER STANDARD			
Electric system Length 281 mm	1 MODULE	4 W	DR10163.01.ST. ✖
Electric system Length 562 mm	2 – 4 MODULES	8 to 16 W	DR10163.02.ST. ✖
Electric system Length 843 mm	5 – 9 MODULES	20 to 36 W	DR10163.03.ST. ✖
Electric system Length 1124 mm	10 – 17 MODULES	40 to 68 W	DR10163.04.ST. ✖
Electric system Length 1405 mm	18 – 19 MODULES	72 to 76 W	DR10163.05.ST. ✖

ALBA PRO DRIVER FOR CUSTOM PRODUCT – POWER HIGH			
Electric system Length 281 mm	1 MODULE	8 W	DR10163.01.HI. ✖
Electric system Length 562 mm	2 – 4 MODULES	16 W	DR10163.02.HI. ✖
Electric system Length 843 mm	5 – 9 MODULES	24 to 32 W	DR10163.03.HI. ✖
Electric system Length 1124 mm	10 – 17 MODULES	40 to 64 W	DR10163.04.HI. ✖
Electric system Length 1405 mm	18 – 19 MODULES	72 to 88 W	DR10163.05.HI. ✖

- FINISH**
 - B · Black
 - W · White
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Up light
- Down light

TECHNICAL INFORMATION – Closed luminaire

POWER STANDARD – Closed luminaire

		843	1124	1405
24 V	4 W	387 – 405 – 425 lm	622 – 634 – 666 lm	824 – 840 – 882 lm
	500 mA	17 W	22 W	28 W
		1454 – 2907 – 3129 lm	3272 – 3876 – 4172 lm	4090 – 4845 – 5215 lm
Opal	2700 K	255EH 112	255EJ 112	255EL 112
	3000 K	255EH 113	255EJ 113	255EL 113
	4000 K	255EH 115	255EJ 115	255EL 115
Microprismatic	2700 K	255EH 122	255EJ 122	255EL 122
	3000 K	255EH 123	255EJ 123	255EL 123
	4000 K	255EH 125	255EJ 125	255EL 125

POWER HIGH – Closed luminaire

		843	1124	1405
24 V	4 W	387 – 405 – 425 lm	622 – 634 – 666 lm	824 – 840 – 882 lm
	500 mA	17 W	22 W	28 W
		1454 – 2907 – 3129 lm	3272 – 3876 – 4172 lm	4090 – 4845 – 5215 lm
Opal	2700 K	255EH 312	255EJ 312	255EL 312
	3000 K	255EH 313	255EJ 313	255EL 313
	4000 K	255EH 315	255EJ 315	255EL 315
Microprismatic	2700 K	255EH 322	255EJ 322	255EL 322
	3000 K	255EH 323	255EJ 323	255EL 323
	4000 K	255EH 325	255EJ 325	255EL 325


The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

Closed luminaire with 4 opaques and 3 lens modules

		POWER STANDARD	POWER HIGH
1100 mm – 1098 mm (TR)			
24 V	8 W	622 – 634 – 666 lm	1007 – 1069 – 1131 lm
	500 mA	12 W	24 W
		1725 – 1800 – 1875 lm	3345 – 3495 – 3660 lm
65°	2700 K	256EW 172	256EW 372
	3000 K	256EW 173	256EW 373
	4000 K	256EW 175	256EW 375

Closed luminaire with 5 opaques and 4 lens modules

		POWER STANDARD	POWER HIGH
1465 mm – 1475 mm (RF) · 1463 mm (TR)			
24 V	12 W	824 – 840 – 882 lm	1334 – 1417 – 1500 lm
	500 mA	16 W	32 W
		2300 – 2400 – 2500 lm	4460 – 4660 – 4880 lm
65°	2700 K	256EX 172	256EX 372
	3000 K	256EX 173	256EX 373
	4000 K	256EX 175	256EX 375

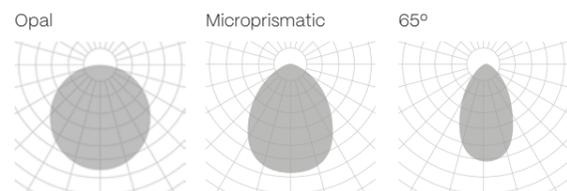


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 7 · Wall surface
 - 8 · Track
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Down light

COMPONENTS – Configurable & closed luminaire

COMPONENTS

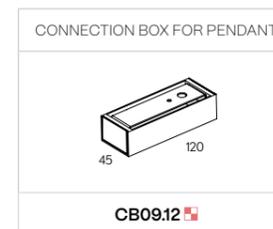

Not included, please select

OTHER PENDANT OPTIONS


2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60		5 m	SC05.SA
	80 mm	SC21.80		7 m	SC07.SA
	100 mm	SC100.60		10 m	SC10.SA

JOINTS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	WALL-CEILING JOINT	T- JOINT
A255JB1XXXW	A255JE XXX	A255JJ XXX	A255LL XXX	A255JH XXX

- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 7 · Wall surface
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**
 - Special finishes
 - Special color temperatures
 - Custom dimensions
 - CRI 80
 - Emergency lighting
 - Motion detection
 - Wireless control options
 - RGB


ALBA PLUS

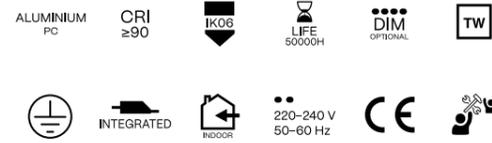


INSTALLATION




1. PENDANT

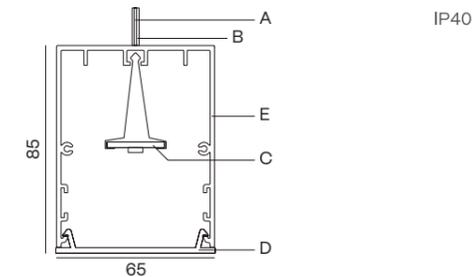


2. SURFACE

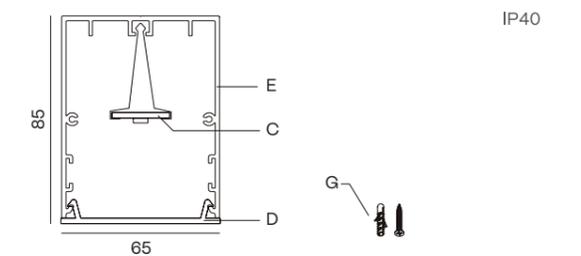


3. RECESSED WITH FRAME

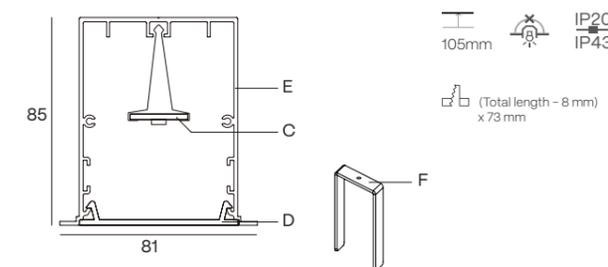

4. TRIMLESS

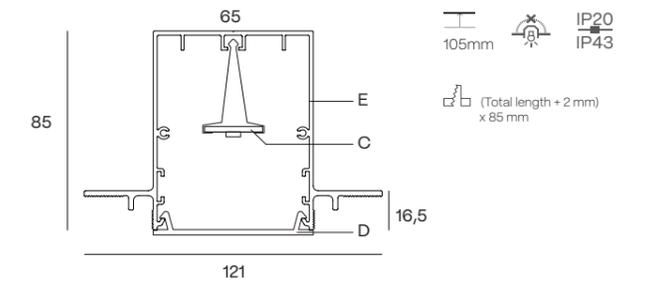

5. TRACKLIGHT

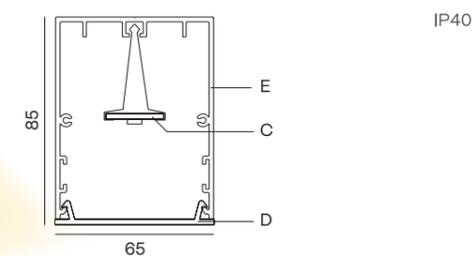


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194


- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile
- F - Mounting kit

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


COMPONENTS

COVER KIT	REFERENCE	ALBA PLUS ASYMETRIC ACCESORY	REFERENCE
	TF01  2 x 3 mm		TF01  2 x 3 mm

BOX FOR PENDANT Not included, please select

CONNECTION BOX	REFERENCE
 45 120	CB09.12 

OTHER PENDANT OPTIONS

2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60 		5 m	SC05.SA
	80 mm	SC21.80 		7 m	SC07.SA
	100 mm	SC100.60 		10 m	SC10.SA

JOINTS

LINEAR JOINT	ANGLE JOINT	T - JOINT	T - JOINT
			
UR03	UL01 	UT01 	UC01 

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 9 · Track
- FINISH**
 - B · Black
 - W · White
 - S · Special color

- ON DEMAND OPTIONS**
 -  Special finishes
 -  Special color temperatures
 -  Custom dimensions
 -  CRI 80
 -  Emergency lighting
 -  Motion detection
 -  Wireless control options
 -  RGB

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm	10 W 1034 - 1054 - 1107 lm	12 W 1243 - 1268 - 1331 lm	14 W 1460 - 1490 - 1564 lm
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	254EH  112 	254EJ  112 	254EL  112 	254EN  112 	254EP  112 	254ER  112 
	3000 K	254EH  113 	254EJ  113 	254EL  113 	254EN  113 	254EP  113 	254ER  113 
	4000 K	254EH  115 	254EJ  115 	254EL  115 	254EN  115 	254EP  115 	254ER  115 
Microprismatic	2700 K	254EH  122 	254EJ  122 	254EL  122 	254EN  122 	254EP  122 	254ER  122 
	3000 K	254EH  123 	254EJ  123 	254EL  123 	254EN  123 	254EP  123 	254ER  123 
	4000 K	254EH  125 	254EJ  125 	254EL  125 	254EN  125 	254EP  125 	254ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 - 683 - 722 lm	12 W 1007 - 1069 - 1131 lm	16 W 1334 - 1417 - 1500 lm	20 W 1674 - 1777 - 1881 lm	24 W 2014 - 2138 - 2263 lm	28 W 2366 - 2512 - 2658 lm
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
Opal	2700 K	254EH  312 	254EJ  312 	254EL  312 	254EN  312 	254EP  312 	254ER  312 
	3000 K	254EH  313 	254EJ  313 	254EL  313 	254EN  313 	254EP  313 	254ER  313 
	4000 K	254EH  315 	254EJ  315 	254EL  315 	254EN  315 	254EP  315 	254ER  315 
Microprismatic	2700 K	254EH  322 	254EJ  322 	254EL  322 	254EN  322 	254EP  322 	254ER  322 
	3000 K	254EH  323 	254EJ  323 	254EL  323 	254EN  323 	254EP 323	254ER 323
	4000 K	254EH 325	254EJ 325	254EL 325	254EN 325	254EP 325	254ER 325

The ALBA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

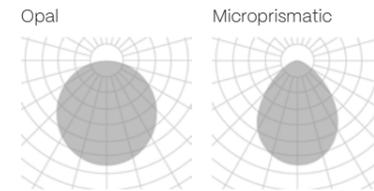

The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 9 · Track
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
-  Up light
-  Down light

ALBA DOUBLE

- ALUMINIUM
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

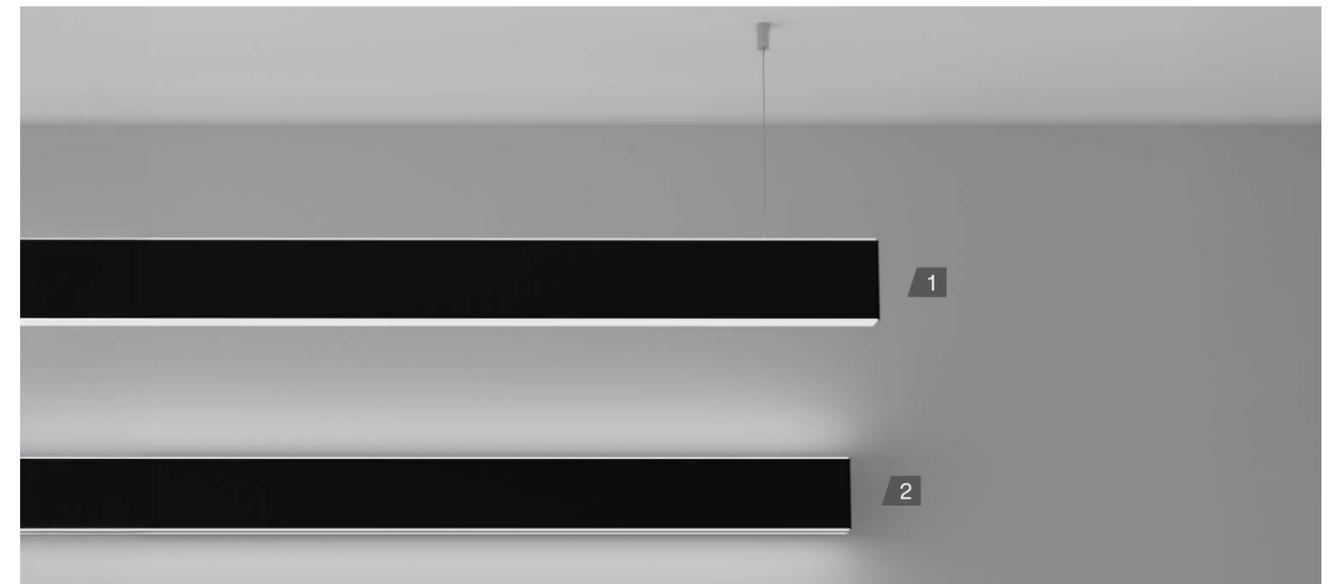


1. PENDANT UP & DOWN LIGHT

2. WALL SURFACE UP & DOWN LIGHT

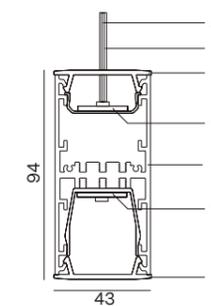

IP40

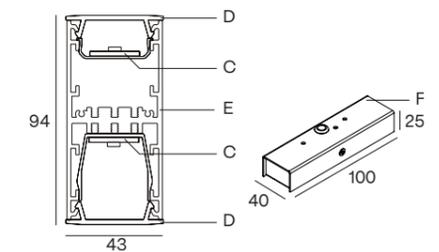

IP40

Compatible only with electric system lengths (mm): 281 · 422 · 562.


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile
- F - Mounting kit


COMPONENTS

COVER KIT FOR PENDANT	REFERENCE
	TF042 2 x 3 mm

BOX FOR PENDANT - Not included, please select

CONNECTION BOX	REFERENCE
 45 120	CB09.12

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		60 mm	SC21.60
	7 m	SC07.SA		80 mm	SC21.80
	10 m	SC10.SA		100 mm	SC100.60

JOINTS

COVER KIT	REFERENCE
	TF04 2 x 3 mm

FINISH

- B · Black
- W · White
- S · Special color

ON DEMAND OPTIONS

-  Special finishes
-  Special color temperatures
-  Hi power
-  CRI 80
-  Emergency lighting
-  Motion detection
-  Wireless control options
-  Custom dimensions
-  RGB

TECHNICAL INFORMATION


POWER STANDARD - PENDANT UP & DOWN LIGHT

		843	1124	1405	1686	1967	2248
	500 mA	17 W 1454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
		17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	250EH2 112 ✖	250EJ2 112 ✖	250EL2 112 ✖	250EN2 112 ✖	250EP2 112 ✖	250ER2 112 ✖
	3000 K	250EH2 113 ✖	250EJ2 113 ✖	250EL2 113 ✖	250EN2 113 ✖	250EP2 113 ✖	250ER2 113 ✖
	4000 K	250EH2 115 ✖	250EJ2 115 ✖	250EL2 115 ✖	250EN2 115 ✖	250EP2 115 ✖	250ER2 115 ✖
Microprismatic	2700 K	250EH2 122 ✖	250EJ2 122 ✖	250EL2 122 ✖	250EN2 122 ✖	250EP2 122 ✖	250ER2 122 ✖
	3000 K	250EH2 123 ✖	250EJ2 123 ✖	250EL2 123 ✖	250EN2 123 ✖	250EP2 123 ✖	250ER2 123 ✖
	4000 K	250EH2 125 ✖	250EJ2 125 ✖	250EL2 125 ✖	250EN2 125 ✖	250EP2 125 ✖	250ER2 125 ✖

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

POWER STANDARD - WALL SURFACE UP & DOWN LIGHT

		281	422	562
	500 mA	6 W 765 - 795 - 825 lm	9 W 1148 - 1193 - 1238 lm	12 W 1530 - 1590 - 1650 lm
		6 W 818 - 969 - 1043 lm	9 W 1227 - 1454 - 1565 lm	12 W 1636 - 1938 - 2086 lm
Opal	2700 K	250EB8 112 ✖	250EB8 112 ✖	250EB8 112 ✖
	3000 K	250EB8 113 ✖	250EB8 113 ✖	250EB8 113 ✖
	4000 K	250EB8 115 ✖	250EB8 115 ✖	250EB8 115 ✖
Microprismatic	2700 K	250EB8 122 ✖	250EB8 122 ✖	250EB8 122 ✖
	3000 K	250EB8 123 ✖	250EB8 123 ✖	250EB8 123 ✖
	4000 K	250EB8 125 ✖	250EB8 125 ✖	250EB8 125 ✖

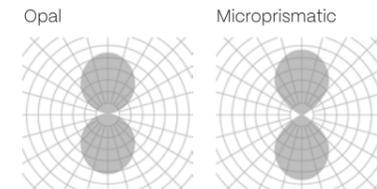

The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

-  Up light
-  Down light

ALBA LINGGO MINI

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE



INSTALLATION





1. PENDANT

2. SURFACE

IP40

IP40

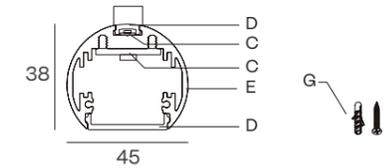



ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile
- F - Mounting kit

COMPONENTS

COVER KIT	REFERENCE
	TF10   2 x 9 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NoN-DIMM	REFERENCE	DRIVER BOX DIMMABLE	REFERENCE
	CB09.12 		CB09.32 		CB09.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE
	5 m	SC05.SA
	7 m	SC07.SA
	10 m	SC10.SA

JOINTS

LINEAR JOINT

UR10

 INSTALLATION	 FINISH	 ON DEMAND OPTIONS
1 · Pendant 3 · Surface	B · Black W · White S · Special color	 Special finishes  Special color temperatures  Motion detection  Custom dimensions  Wireless control options  CRI 80  RGB

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	276EH   112 	276EJ   112 	276EL   112 	276EN   112 	276EP   112 	276ER   112 
	3000 K	276EH   113 	276EJ   113 	276EL   113 	276EN   113 	276EP   113 	276ER   113 
	4000 K	276EH   115 	276EJ   115 	276EL   115 	276EN   115 	276EP   115 	276ER   115 
Microprismatic	2700 K	276EH   122 	276EJ   122 	276EL   122 	276EN   122 	276EP   122 	276ER   122 
	3000 K	276EH   123 	276EJ   123 	276EL   123 	276EN   123 	276EP   123 	276ER   123 
	4000 K	276EH   125 	276EJ   125 	276EL   125 	276EN   125 	276EP   125 	276ER   125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 5058 – 5814 – 6258 lm	45 W 6744 – 7752 – 8344 lm	56 W 8430 – 9690 – 10430 lm	67 W 10116 – 11628 – 12516 lm	78 W 11802 – 13566 – 14602 lm	89 W 13488 – 15504 – 16688 lm
Opal	2700 K	276EH   312 	276EJ   312 	276EL   312 	276EN   312 	276EP   312 	276ER   312 
	3000 K	276EH   313 	276EJ   313 	276EL   313 	276EN   313 	276EP   313 	276ER   313 
	4000 K	276EH   315 	276EJ   315 	276EL   315 	276EN   315 	276EP   315 	276ER   315 
Microprismatic	2700 K	276EH   322 	276EJ   322 	276EL   322 	276EN   322 	276EP   322 	276ER   322 
	3000 K	276EH   323 	276EJ   323 	276EL   323 	276EN   323 	276EP   323 	276ER   323 
	4000 K	276EH   325 	276EJ   325 	276EL   325 	276EN   325 	276EP   325 	276ER   325 


The ALBA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

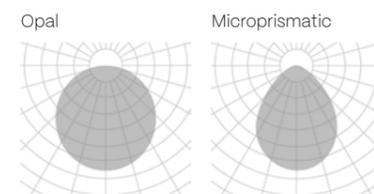

The data shown corresponds to raw values.

 INSTALLATION	 FINISH	 DIMM OPTIONS	 Up light
1 · Pendant 2 · Pendant up light 3 · Surface	B · Black W · White S · Special color	O · On-Off D · Dali P · Push V · 1.10v	 Down light

ALBA LINGGO

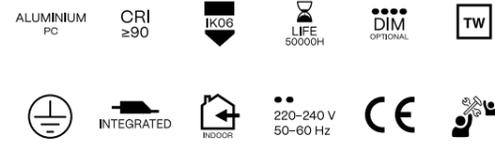


INSTALLATION




1. PENDANT

2. SURFACE

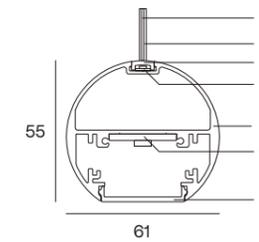

IP40

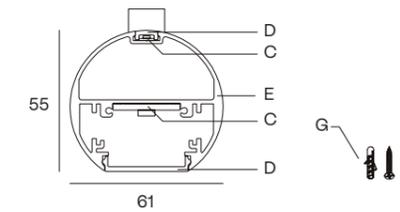

IP40


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

COMPONENTS

COVER KIT	REFERENCE
	TF09  2 x 12 mm

BOXES FOR PENDANT - Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE
	5 m	SC05.SA
	7 m	SC07.SA
	10 m	SC10.SA

JOINTS

LINEAR JOINT

UR09

- INSTALLATION**
- 1 · Pendant
 - 3 · Surface
- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- ON DEMAND OPTIONS**
-  Special finishes
 -  Special color temperatures
 -  Custom dimensions
 -  CRI 80
 -  Emergency lighting
 -  Motion detection
 -  Wireless control options
 -  RGB

TECHNICAL INFORMATION

POWER STANDARD


		843	1124	1405	1686	1967	2248
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm	10 W 1034 - 1054 - 1107 lm	12 W 1243 - 1268 - 1331 lm	14 W 1460 - 1490 - 1564 lm
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	275EH  112 	275EJ  112 	275EL  112 	275EN  112 	275EP  112 	275ER  112 
	3000 K	275EH  113 	275EJ  113 	275EL  113 	275EN  113 	275EP  113 	275ER  113 
	4000 K	275EH  115 	275EJ  115 	275EL  115 	275EN  115 	275EP  115 	275ER  115 
Microprismatic	2700 K	275EH  122 	275EJ  122 	275EL  122 	275EN  122 	275EP  122 	275ER  122 
	3000 K	275EH  123 	275EJ  123 	275EL  123 	275EN  123 	275EP  123 	275ER  123 
	4000 K	275EH  125 	275EJ  125 	275EL  125 	275EN  125 	275EP  125 	275ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 - 683 - 722 lm	12 W 1007 - 1069 - 1131 lm	16 W 1334 - 1417 - 1500 lm	20 W 1674 - 1777 - 1881 lm	24 W 2014 - 2138 - 2263 lm	28 W 2366 - 2512 - 2658 lm
	500 mA	33 W 5058 - 5814 - 6258 lm	45 W 6744 - 7752 - 8344 lm	56 W 8430 - 9690 - 10430 lm	67 W 10116 - 11628 - 12516 lm	78 W 11802 - 13566 - 14602 lm	89 W 13488 - 15504 - 16688 lm
Opal	2700 K	275EH  312 	275EJ  312 	275EL  312 	275EN  312 	275EP  312 	275ER  312 
	3000 K	275EH  313 	275EJ  313 	275EL  313 	275EN  313 	275EP  313 	275ER  313 
	4000 K	275EH  315 	275EJ  315 	275EL  315 	275EN  315 	275EP  315 	275ER  315 
Microprismatic	2700 K	275EH  322 	275EJ  322 	275EL  322 	275EN  322 	275EP  322 	275ER  322 
	3000 K	275EH  323 	275EJ  323 	275EL  323 	275EN  323 	275EP  323 	275ER  323 
	4000 K	275EH  325 	275EJ  325 	275EL  325 	275EN  325 	275EP  325 	275ER  325 

The ALBA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.


Opal



The data shown corresponds to raw values.

- INSTALLATION**
- 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
- FINISH**
- B** · Black
 - W** · White
 - S** · Special color
- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v
-  Up light
 Down light


FLY FAMILY

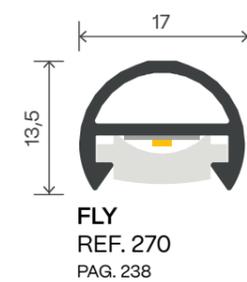

FLY

NEW

- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

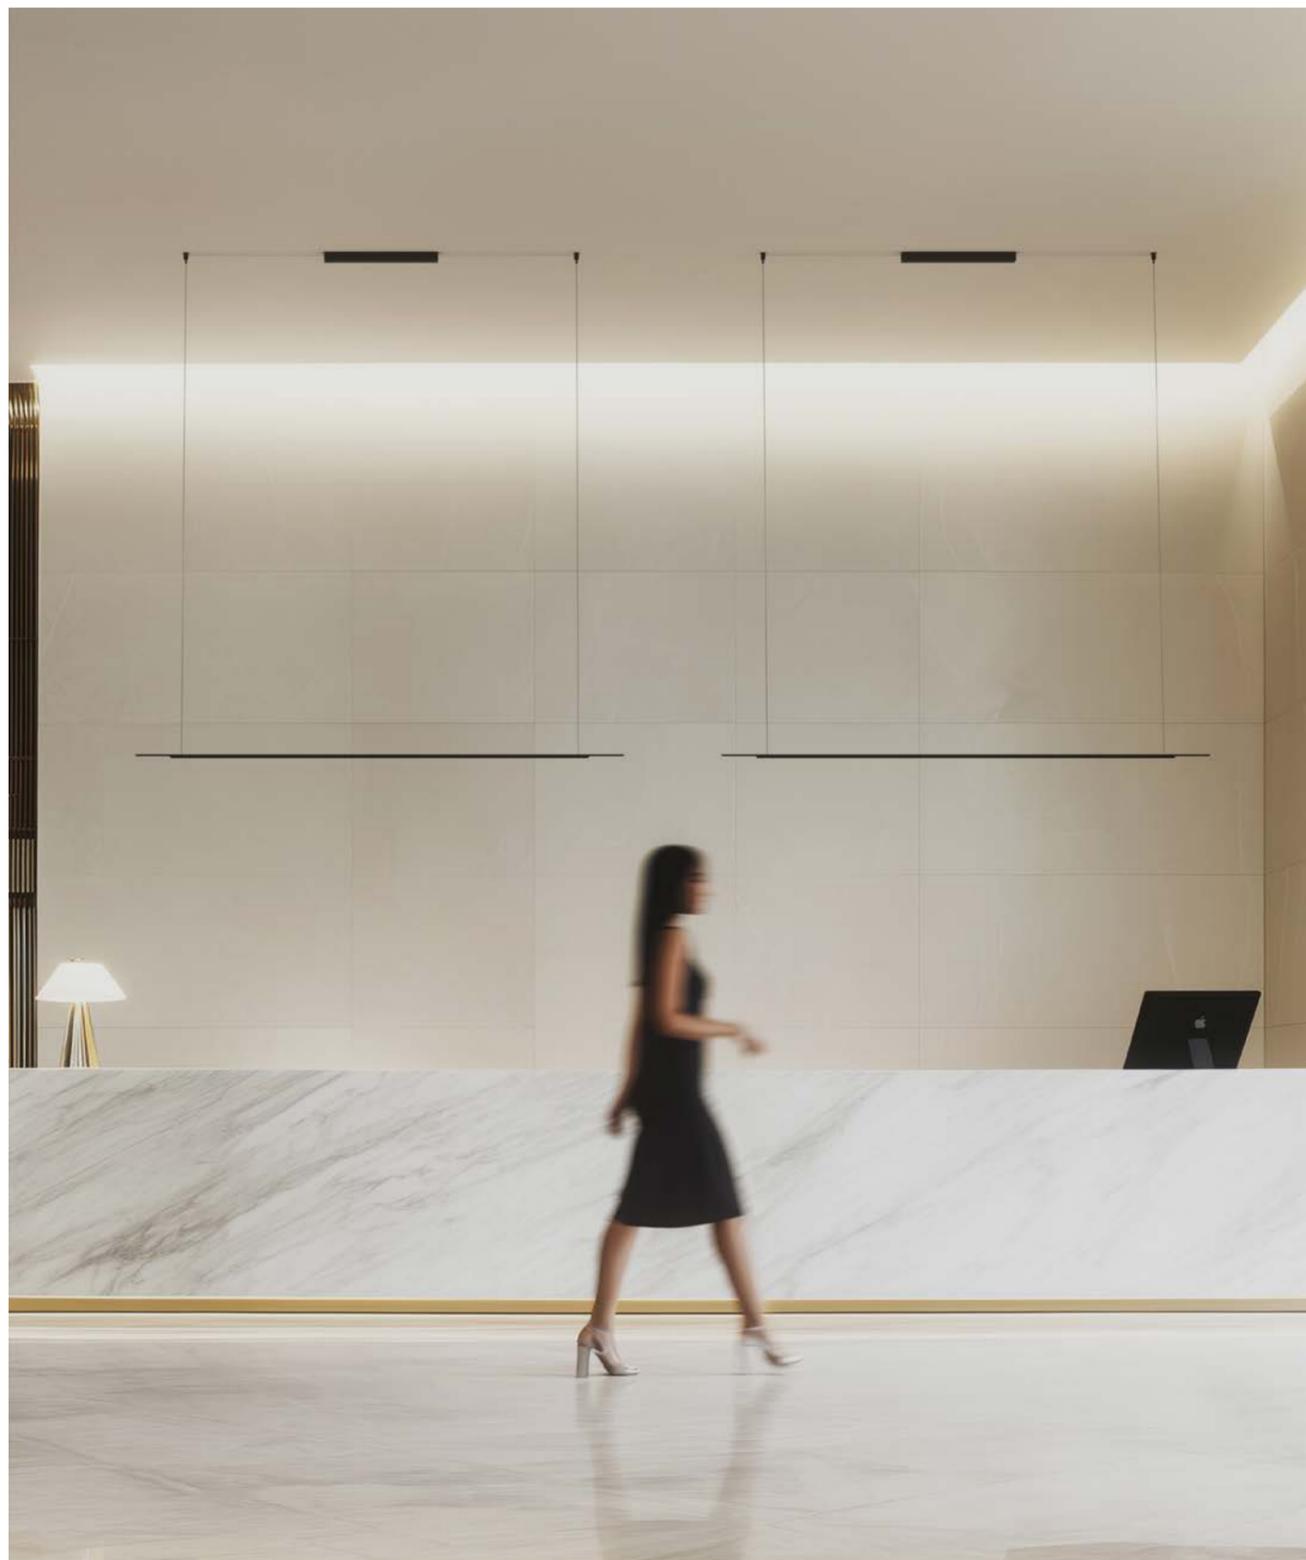


INSTALLATION



1. PENDANT

IP40

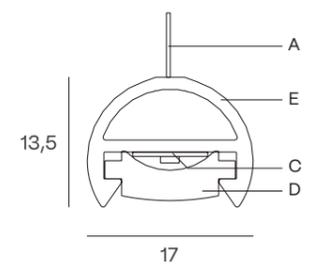

ELECTRIC SYSTEM LENGTH mm.
1000


- A - Electrified cable (3 m)
- C - LED module
- D - Diffuser
- E - Aluminium profile

TECHNICAL INFORMATION


POWER STANDARD

		1000	
		29 W	
		2249 - 2429 - 2666 lm	
Silicone	2700 K	270EH1 112 ✖	
	3000 K	270EH1 113 ✖	
	4000 K	270EH1 115 ✖	

When the profile (without end caps) measures up to 1400 mm, 2 suspension kits are used.
 When the profile (without end caps) measures up to 2800 mm, 3 suspension kits are used.

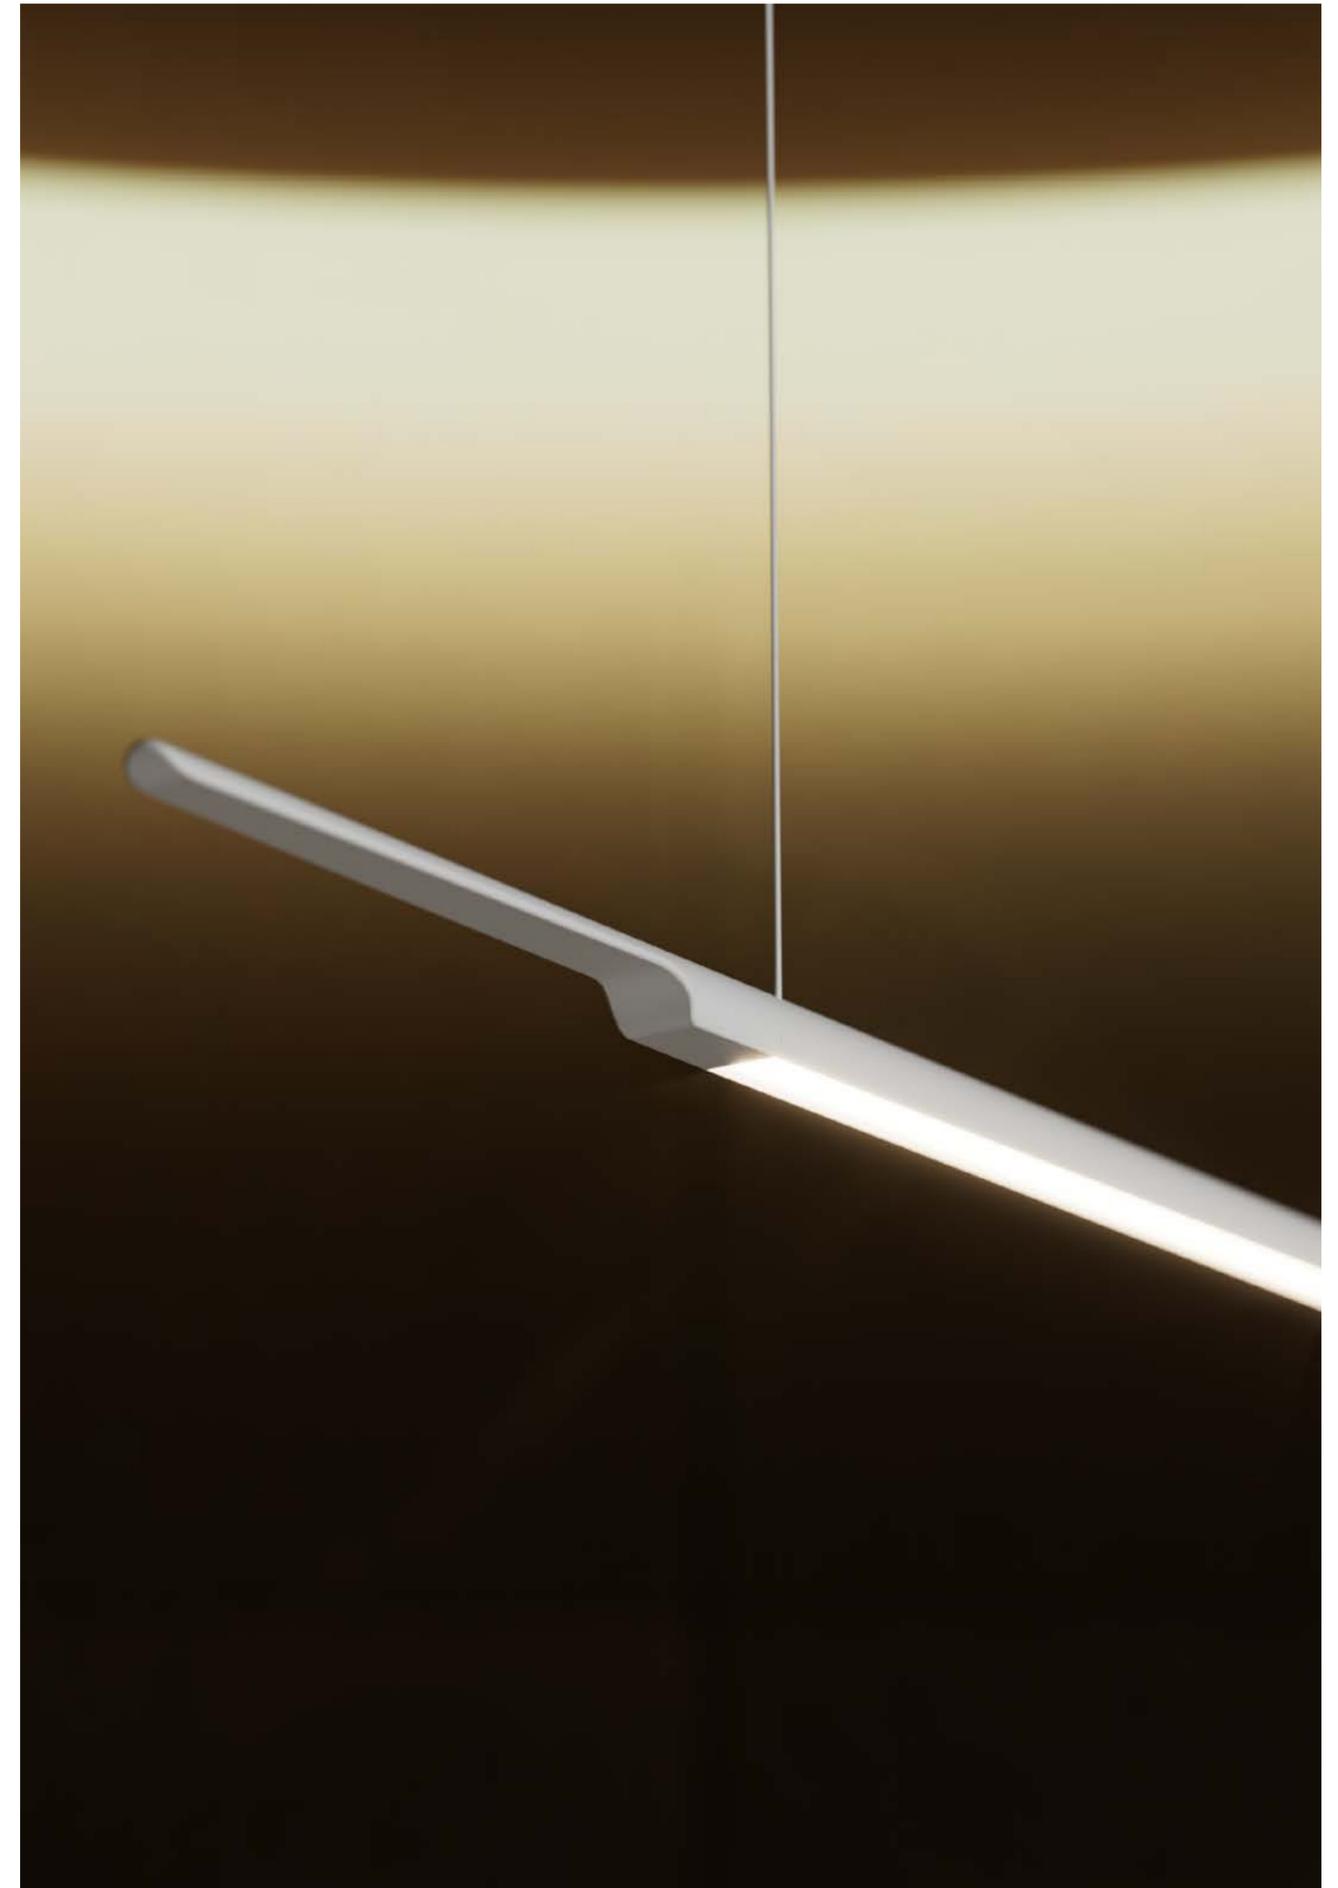

Silicone



The data shown corresponds to raw values.

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

 Down light

ON DEMAND OPTIONS

-  Special finishes
-  **TW** Tunable white
-  Custom dimensions
-  **RGB**

VAULT FAMILY

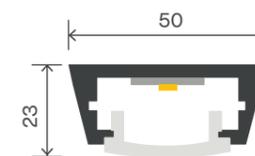

VAULT
REF. 265
PAG. 244

VAULT

NEW

- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



INSTALLATION





1. PENDANT

2. SURFACE

IP40

IP40

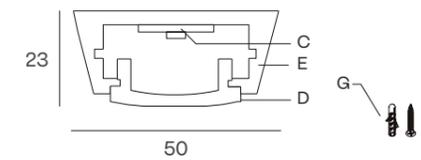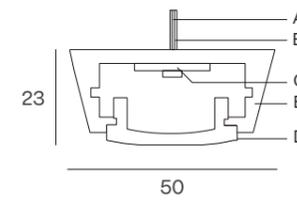

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

TECHNICAL INFORMATION

POWER STANDARD


		843	1124	1405	1686	1967	2248
		450 mA 15 W 2226 - 2297 - 2387 lm	600 mA 20 W 2968 - 3062 - 3182 lm	750 mA 25 W 3710 - 3828 - 3978 lm	900 mA 30 W 4452 - 4593 - 4773 lm	1500 mA 35 W 5194 - 5359 - 5569 lm	1200 mA 40 W 5936 - 6124 - 6364 lm
Silicone	2700 K	265EH 112	265EJ 112	265EL 112	265EN 112	265EP 112	265ER 112
	3000 K	265EH 113	265EJ 113	265EL 113	265EN 113	265EP 113	265ER 113
	4000 K	265EH 115	265EJ 115	265EL 115	265EN 115	265EP 115	265ER 115

POWER HIGH

		843	1124	1405	1686
		900 mA 30 W 4452 - 4593 - 4773 lm	1200 mA 40 W 5936 - 6124 - 6364 lm	1500 mA 50 W 7420 - 7655 - 7955 lm	1800 mA 61 W 8904 - 9186 - 9546 lm
Silicone	2700 K	265EH 312	265EJ 312	265EL 312	265EN 312
	3000 K	265EH 313	265EJ 313	265EL 313	265EN 313
	4000 K	265EH 315	265EJ 315	265EL 315	265EN 315

The VAULT family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

Silicone



The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


ON DEMAND OPTIONS

- Special finishes
- TW** Tunable white
- Custom dimensions
- RGB


Down light



OKKIA FAMILY



OKKIA PLUS
REF. A287PBXXXX 
PAG. 250




OKKIA
REF. 287
PAG. 250

OKKIA

- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- TW
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE




INSTALLATION

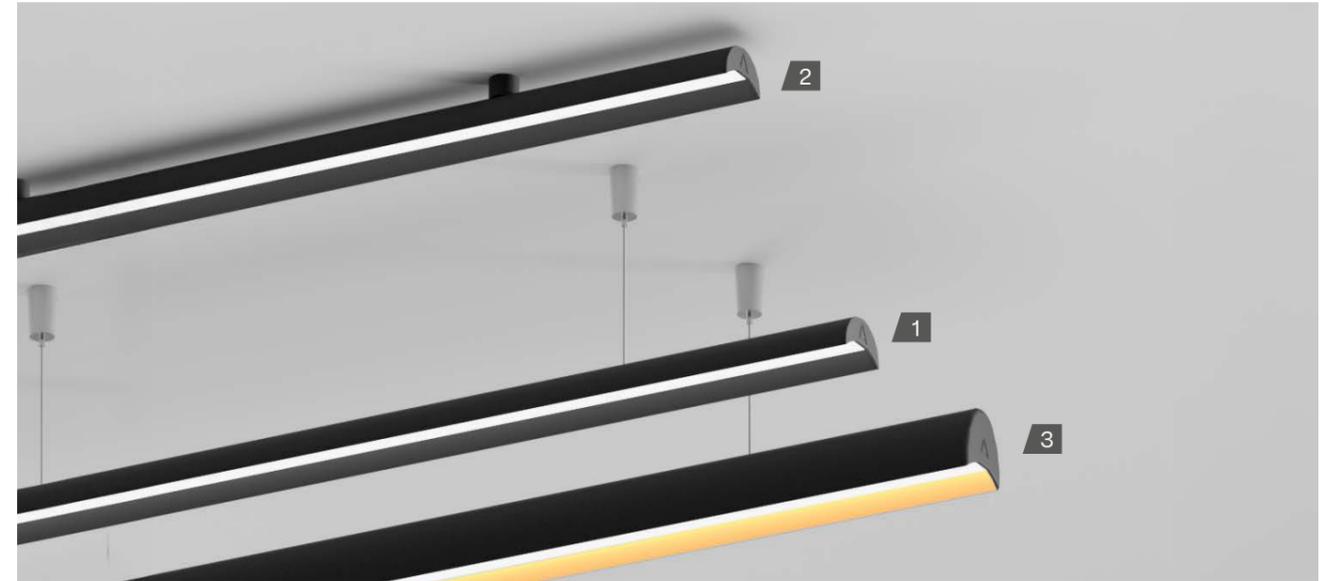


1. PENDANT

IP40

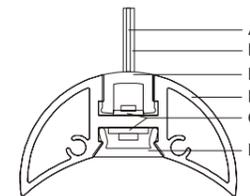


2. SURFACE

IP40

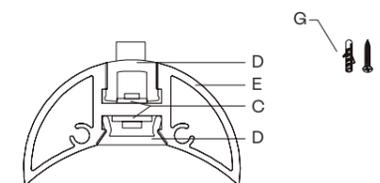

3. PLUS ACCESORY

IP40

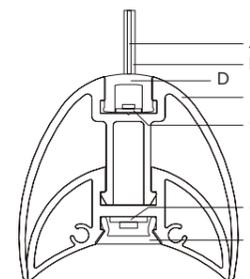




ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED stripe
- D - Diffuser
- E - Aluminium profile
- F - Aluminium cover


COMPONENTS

COVER KIT	REFERENCE
	TF11   2 x 2 mm



BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NON-DIMM	REFERENCE	CONNECTION BOX	REFERENCE
	CB09.12 		CB06.32 		CB06.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		60 mm	SC21.60 
	7 m	SC07.SA		80 mm	SC21.80 
	10 m	SC10.SA		100 mm	SC100.60 

OKKIA PLUS ACCESSORY

COVER KIT	REFERENCE	OKKIA PLUS ACCESSORY	SKETCH	REFERENCE
	TF12   2 x 2 mm			TF01   2 x 3 mm

- INSTALLATION**
- Pendant
 - Pendant up light
 - Surface
- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- ON DEMAND OPTIONS**
-  Special finishes
 -  RGB
 -  Tunable white
 -  Number switches


TECHNICAL INFORMATION

POWER STANDAR

		843	1124	1405	1686	1967	2248
	24 VdC	17 W 1249 – 1249 – 1481 lm	21 W 1562 – 1687 – 1852 lm	16 W 2186 – 2361 – 2592 lm	36 W 2655 – 2867 – 3148 lm	42 W 3123 – 3373 – 3703 lm	48 W 3591 – 3879 – 4259 lm
	24 VdC	23 W 1799 – 1943 – 2640 lm	29 W 2249 – 2429 – 2666 lm	40 W 3148 – 3400 – 3733 lm	49 W 3823 – 4129 – 4533 lm	58 W 4497 – 4857 – 5332 lm	66 W 5172 – 5586 – 6132 lm
Silicone	2700 K	287EH   112 	287EJ   112 	287EL   112 	287EN   112 	287EP   112 	287ER   112 
	3000 K	287EH   113 	287EJ   113 	287EL   113 	287EN   113 	287EP   113 	287ER   113 
	4000 K	287EH   115 	287EJ   115 	287EL   115 	287EN   115 	287EP   115 	287ER   115 

The OKKIA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.


Silicone



The data shown corresponds to raw values.


- INSTALLATION**
- Pendant
 - Pendant up light
 - Surface
- FINISH**
- B** · Black
 - W** · White
 - S** · Special color
- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v
-  Up light
 Down light

ALZIRA FAMILY

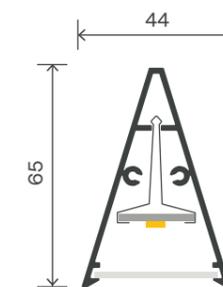

ALZIRA
REF. 267
PAG. 256


ALZIRA

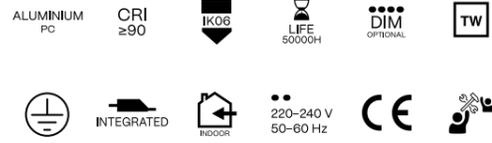


INSTALLATION



1. PENDANT

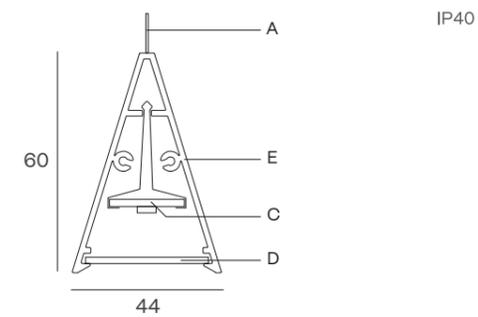

2. WALL SURFACE

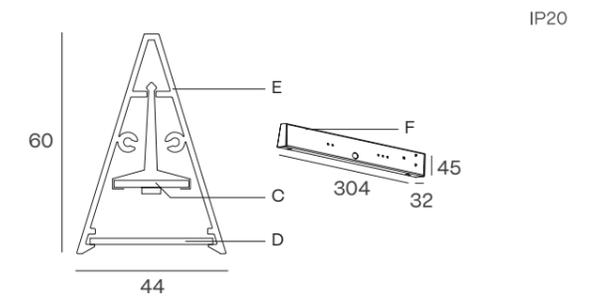


Compatible only with electric system lengths (mm): 281 · 422 · 562
See page 194
Example: **267EB2** **112** ✖

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A** – Electrified cable (3 m)
- C** – LED module
- D** – Diffuser
- E** – Aluminium profile
- F** – Mounting kit

COMPONENTS

COVER KIT	REFERENCE
	TF141 2 x 3 mm

INCLUDED WITH PENDANT VERSION

Connection box with SC03.SA - 3 m wire

TECHNICAL INFORMATION

POWER STANDARD – Pendant installation only

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	267EH2 S 112 ✖	267EJ2 S 112 ✖	267EL2 S 112 ✖	267EN2 S 112 ✖	267EP2 S 112 ✖	267ER2 S 112 ✖
	3000 K	267EH2 S 113 ✖	267EJ2 S 113 ✖	267EL2 S 113 ✖	267EN2 S 113 ✖	267EP2 S 113 ✖	267ER2 S 113 ✖
Microprismatic	4000 K	267EH2 S 115 ✖	267EJ2 S 115 ✖	267EL2 S 115 ✖	267EN2 S 115 ✖	267EP2 S 115 ✖	267ER2 S 115 ✖
	2700 K	267EH2 S 122 ✖	267EJ2 S 122 ✖	267EL2 S 122 ✖	267EN2 S 122 ✖	267EP2 S 122 ✖	267ER2 S 122 ✖
	3000 K	267EH2 S 123 ✖	267EJ2 S 123 ✖	267EL2 S 123 ✖	267EN2 S 123 ✖	267EP2 S 123 ✖	267ER2 S 123 ✖
	4000 K	267EH2 S 125 ✖	267EJ2 S 125 ✖	267EL2 S 125 ✖	267EN2 S 125 ✖	267EP2 S 125 ✖	267ER2 S 125 ✖

POWER HIGH – Pendant installation only

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 5058 - 5814 - 6258 lm	45 W 6744 - 7752 - 8344 lm	56 W 8430 - 9690 - 10430 lm	67 W 10116 - 11628 - 12516 lm	78 W 11802 - 13566 - 14602 lm	89 W 13488 - 15504 - 16688 lm
	2700 K	267EH2 S 312 ✖	267EJ2 S 312 ✖	267EL2 S 312 ✖	267EN2 S 312 ✖	267EP2 S 312 ✖	267ER2 S 312 ✖
	3000 K	267EH2 S 313 ✖	267EJ2 S 313 ✖	267EL2 S 313 ✖	267EN2 S 313 ✖	267EP2 S 313 ✖	267ER2 S 313 ✖
Microprismatic	4000 K	267EH2 S 315 ✖	267EJ2 S 315 ✖	267EL2 S 315 ✖	267EN2 S 315 ✖	267EP2 S 315 ✖	267ER2 S 315 ✖
	2700 K	267EH2 S 322 ✖	267EJ2 S 322 ✖	267EL2 S 322 ✖	267EN2 S 322 ✖	267EP2 S 322 ✖	267ER2 S 322 ✖
	3000 K	267EH2 S 323 ✖	267EJ2 S 323 ✖	267EL2 S 323 ✖	267EN2 S 323 ✖	267EP2 S 323 ✖	267ER2 S 323 ✖
	4000 K	267EH2 S 325 ✖	267EJ2 S 325 ✖	267EL2 S 325 ✖	267EN2 S 325 ✖	267EP2 S 325 ✖	267ER2 S 325 ✖

The ALZIRA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

- FINISH**
- B · Black
 - W · White
 - S · Special color

ON DEMAND OPTIONS

-  Motion detection
-  Special color temperatures
-  CRI 80
-  Emergency lighting
-  RGB
-  Remote wireless control options

 Down light

FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Iluminación de precisión

Diseñada para definir, guiar y enfatizar elementos arquitectónicos, la iluminación de precisión permite dirigir la luz con exactitud e intención. La direccionalidad controlada posibilita modelar, jerarquizar e interpretar el espacio a través de la luz.

Basado en ópticas precisas y componentes técnicos, el sistema ofrece un alto confort visual, un control eficaz del deslumbramiento y flexibilidad, respondiendo a las exigencias de los proyectos arquitectónicos y de interior profesionales.



Precision lighting

Designed to define, guide and emphasise architectural elements, spotlight lighting allows light to be directed with accuracy and intention. Controlled directionality enables spaces to be shaped, layered and interpreted through light.

Based on precise optics and technical components, the system offers high visual comfort, effective glare control and flexibility, meeting the requirements of professional architectural and interior projects.

SPOTLIGHTS

MARTORELL

PAG. 264

PATRICIA

PAG. 284

KLIMT

PAG. 290

CUBE

PAG. 296

LUK

PAG. 304

ORACLE

PAG. 310

LENT

PAG. 314

ASTRA

PAG. 320

VIO

PAG. 324

SASSY

PAG. 328

ROY

PAG. 336

CAN REVIEW

PAG. 340

ALDAIA

PAG. 346

VADI

PAG. 350

KONI

PAG. 354

CATLI

PAG. 360

S
T
H
I
S
I
S
S
U
E
C
O
N
T
A
I
N
S
A
L
L
T
H
E
S
E
C
O
L
L
E
C
T
I
O
N
S



MARTORELL FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE


MARTORELL FLIP

NEW


Ø45

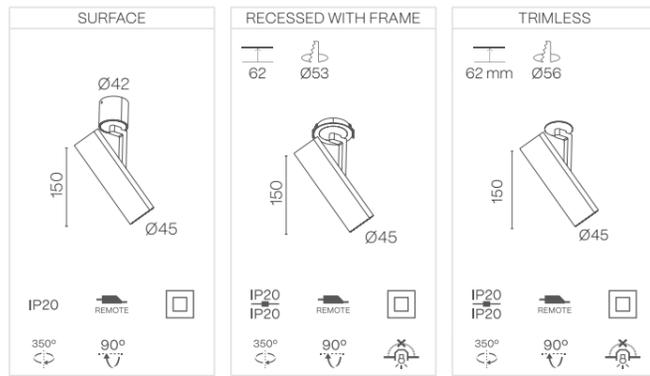

Ø65

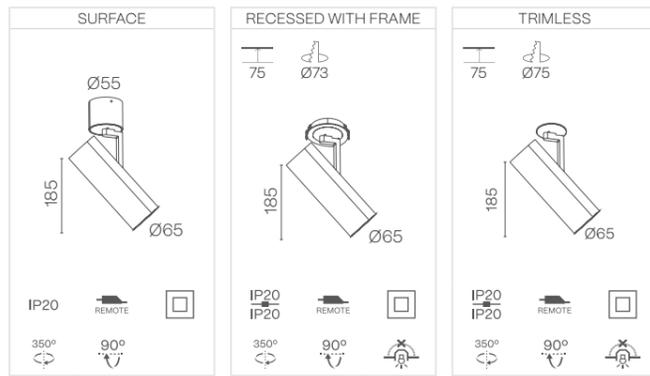

Ø95

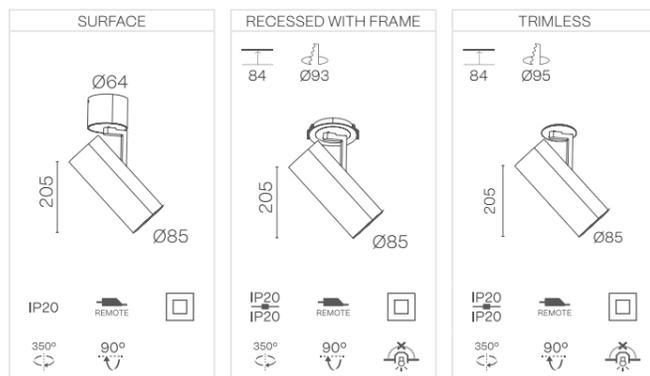

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL FLIP

POWER STANDARD

		Ø45	
24°	700 mA	7 W 886 - 898 - 939 lm	
	2700 K	337EB 142	
	3000 K	337EB 143	
38°	4000 K	337EB 145	
	2700 K	337EB 152	
	3000 K	337EB 153	
	4000 K	337EB 155	

		Ø65	Ø95
15°	700 mA	6 W 1784 - 1820 - 1866 lm	9 W 2720 - 2767 - 2888 lm
	2700 K	337EE 122	337EH 122
	3000 K	337EE 123	337EH 123
24°	4000 K	337EE 125	337EH 125
	2700 K	337EE 142	337EH 142
	3000 K	337EE 143	337EH 143
38°	4000 K	337EE 145	337EH 145
	2700 K	337EE 152	337EH 152
	3000 K	337EE 153	337EH 153
	4000 K	337EE 155	337EH 155

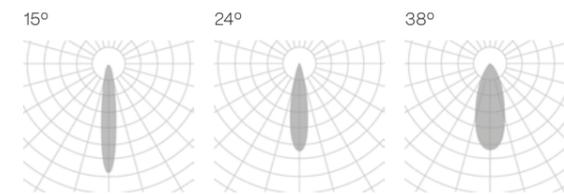


The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 5 · Recessed with frame
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Down light

MARTORELL MOVE


Ø26

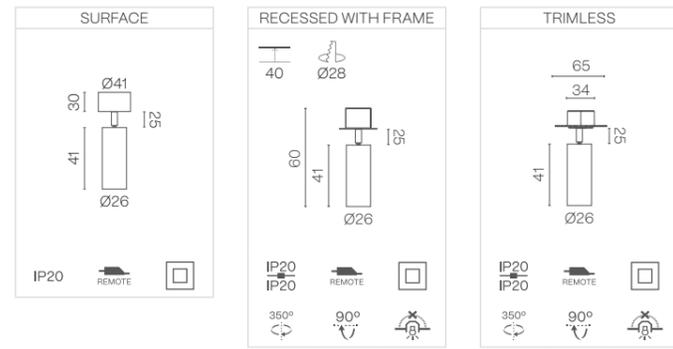

Ø40

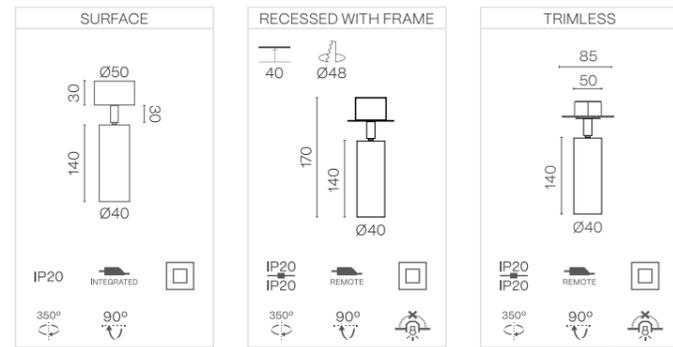

Ø60

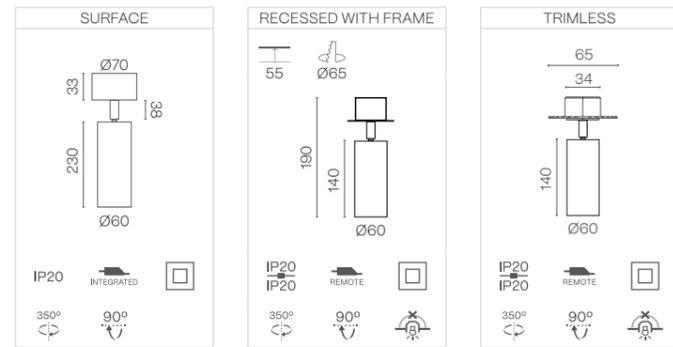

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL MOVE

POWER STANDARD

		Ø26	
	700 mA	2 W	195 - 209 - 237 lm
20°	2700 K	339EB	132
	3000 K	339EB	133
	4000 K	339EB	135
40°	2700 K	339EB	152
	3000 K	339EB	153
	4000 K	339EB	155
60°	2700 K	339EB	172
	3000 K	339EB	173
	4000 K	339EB	175


		Ø40		Ø60	
		700 mA 6 W	886 - 898 - 939 lm	350 mA 12 W	1745 - 1774 - 1857 lm
18°	2700 K	339EE	132	339EH	132
	3000 K	339EE	133	339EH	133
	4000 K	339EE	135	339EH	135
25°	2700 K	339EE	142	339EH	142
	3000 K	339EE	143	339EH	143
	4000 K	339EE	145	339EH	145
35°	2700 K	339EE	152	339EH	152
	3000 K	339EE	153	339EH	153
	4000 K	339EE	155	339EH	155

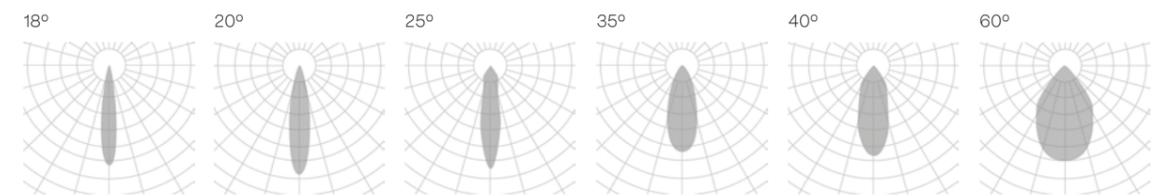


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light


Ø33/Ø26

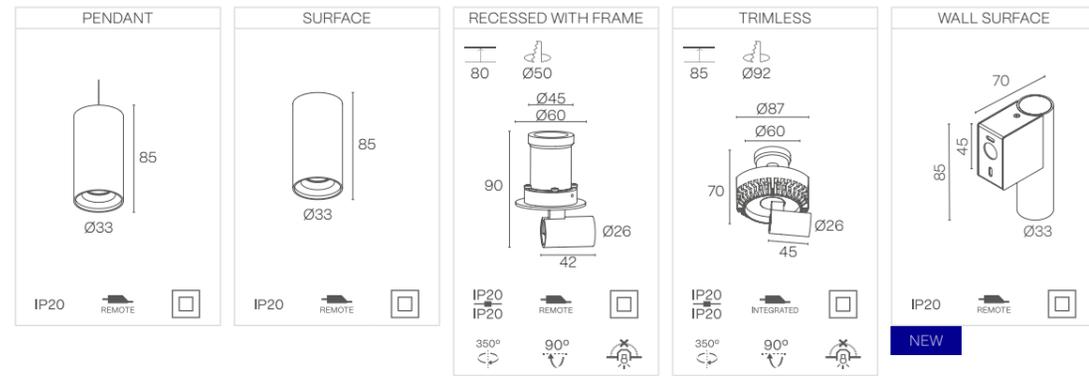

Ø40

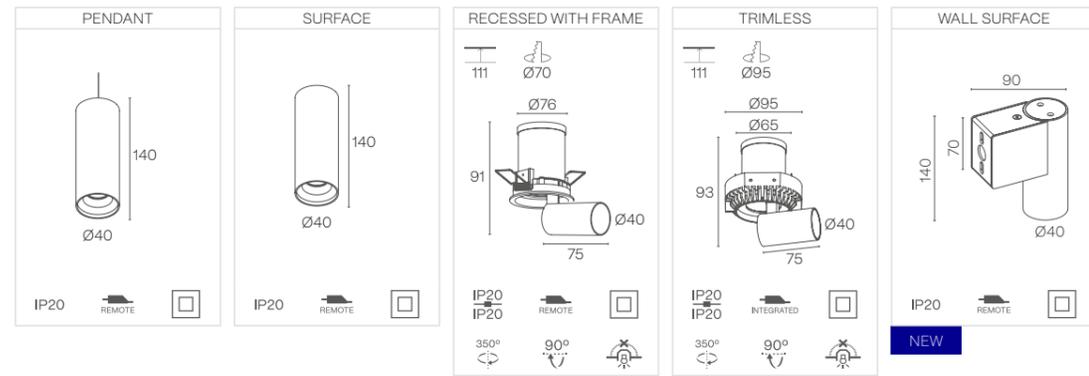

Ø60

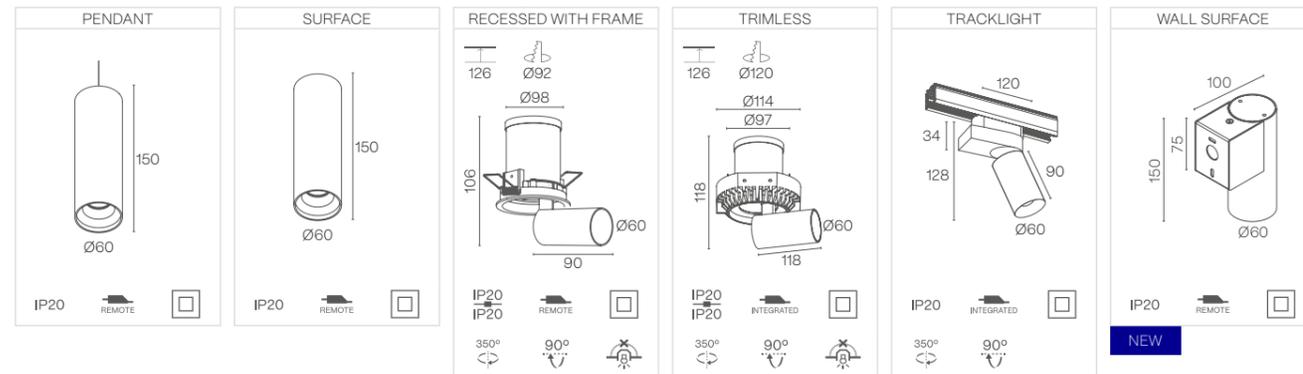


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

POWER STANDARD

		Ø33/Ø26	Ø40	Ø60
		700 mA 2 W 195 - 209 - 237 lm	700 mA 6 W 886 - 898 - 939 lm	350 mA 12 W 1745 - 1774 - 1857 lm
15°	2700 K	-	335EE 122	335EH 122
	3000 K	-	335EE 123	335EH 123
	4000 K	-	335EE 125	335EH 125
24°	2700 K	335EB 142	335EE 142	335EH 142
	3000 K	335EB 143	335EE 143	335EH 143
	4000 K	335EB 145	335EE 145	335EH 145
32°	2700 K	335EB 152	335EE 152	335EH 152
	3000 K	335EB 153	335EE 153	335EH 153
	4000 K	335EB 155	335EE 155	335EH 155
60°	2700 K	-	-	335EH 172
	3000 K	-	-	335EH 173
	4000 K	-	-	335EH 175

		TRACKLIGHT Ø60
		350 mA 12 W 1745 - 1774 - 1857 lm
24°	2700 K	335EH9 142
	3000 K	335EH9 143
	4000 K	335EH9 145
32°	2700 K	335EH9 152
	3000 K	335EH9 153
	4000 K	335EH9 155

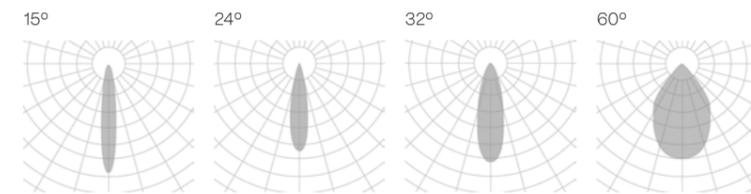


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

MARTORELL TUBE MOVE

Ø60

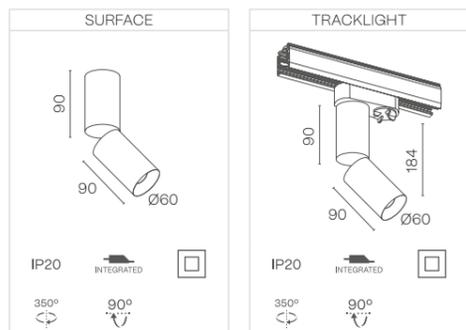


ON DEMAND OPTIONS

Wireless control options

MARTORELL TUBE MOVE

POWER STANDARD

		Ø60	
19°	500 mA	15 W 796 - 841 - 929 lm	
	2700 K	345EH 96 132	
	3000 K	345EH 96 133	
24°	4000 K	345EH 96 135	
	2700 K	345EH 96 142	
	3000 K	345EH 96 143	
36°	4000 K	345EH 96 145	
	2700 K	345EH 96 152	
	3000 K	345EH 96 153	
	4000 K	345EH 96 155	

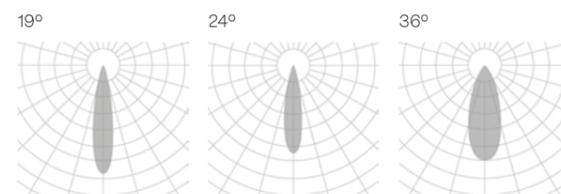

The data shown corresponds to raw values.

INSTALLATION

- 3 - Surface
- 9 - Tracklight

FINISH

- B - Black
- W - White
- G - Black - white
- H - White - black
- I - White - special color
- J - Black - special color


DIMM OPTIONS

- O - On-Off
- D - Dali
- P - Push


Down light

MARTORELL CRATE


CRATE

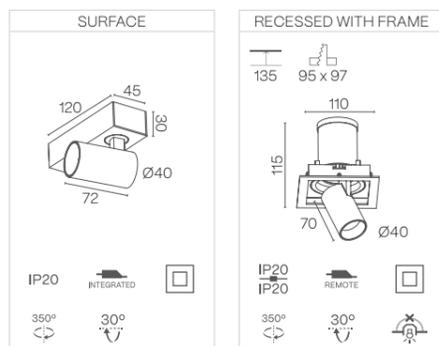

CRATE DOUBLE

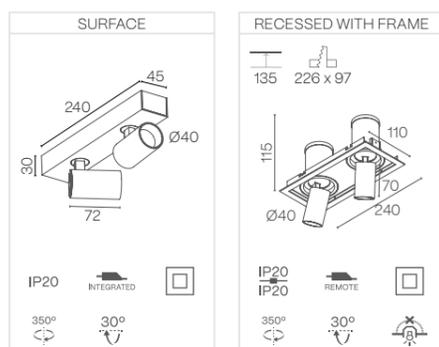

CRATE TRIPLE

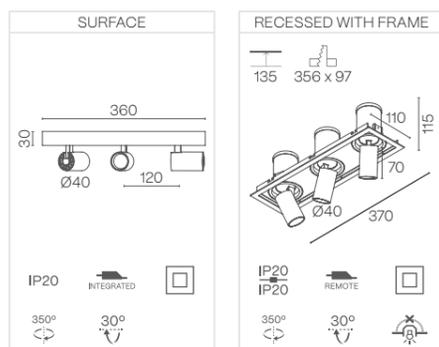


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL CRATE

POWER STANDARD

		CRATE	CRATE DOUBLE	CRATE TRIPLE
15°	700 mA	12 W 470 - 498 - 515 lm	16 W 940 - 996 - 1030 lm	24 W 1410 - 1494 - 1545 lm
	2700 K	336EB 122	336EE 122	336EH 122
	3000 K	336EB 123	336EE 123	336EH 123
24°	4000 K	336EB 125	336EE 125	336EH 125
	2700 K	336EB 142	336EE 142	336EH 142
	3000 K	336EB 143	336EE 143	336EH 143
32°	4000 K	336EB 145	336EE 145	336EH 145
	2700 K	336EB 152	336EE 152	336EH 152
	3000 K	336EB 153	336EE 153	336EH 153
	4000 K	336EB 155	336EE 155	336EH 155

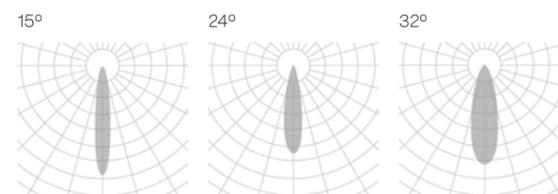


The data shown corresponds to raw values.


- INSTALLATION**
 - FINISH**
 - DIMM OPTIONS**
 - Down light
- 1 · Pendant
 - B · Black
 - O · On-Off
 - 2 · Pendant up light
 - W · White
 - D · Dali
 - 3 · Surface
 - G · Black - white
 - P · Push
 - 4 · Recessed with frame
 - H · White - black
 - 5 · Trimless
 - I · White - special color
 - J · Black - special color

MARTORELL MINI CRATE


MINI CRATE

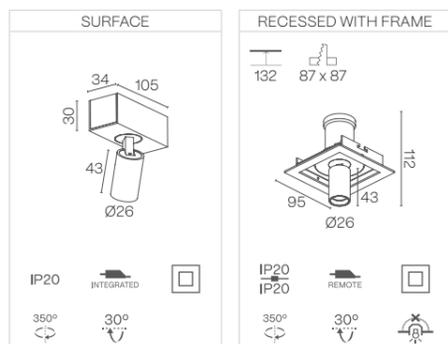

MINI CRATE DOUBLE

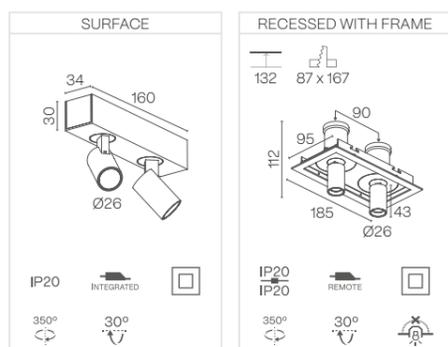

MINI CRATE TRIPLE

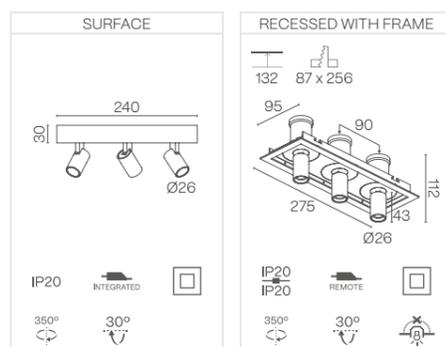

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL MINI CRATE

POWER STANDARD

		MINI CRATE
	700 mA	3 W 175 - 188 - 199 lm
20°	2700 K	338EB 132
	3000 K	338EB 133
	4000 K	338EB 135
40°	2700 K	338EB 152
	3000 K	338EB 153
	4000 K	338EB 155
60°	2700 K	338EB 172
	3000 K	338EB 173
	4000 K	338EB 175

		MINI CRATE DOUBLE	MINI CRATE TRIPLE
	700 mA	6 W 350 - 376 - 398 lm	9 W 525 - 564 - 597 lm
20°	2700 K	338EE 132	338EH 132
	3000 K	338EE 133	338EH 133
	4000 K	338EE 135	338EH 135
40°	2700 K	338EE 152	338EH 152
	3000 K	338EE 153	338EH 153
	4000 K	338EE 155	338EH 155
60°	2700 K	338EE 172	338EH 172
	3000 K	338EE 173	338EH 173
	4000 K	338EE 175	338EH 175

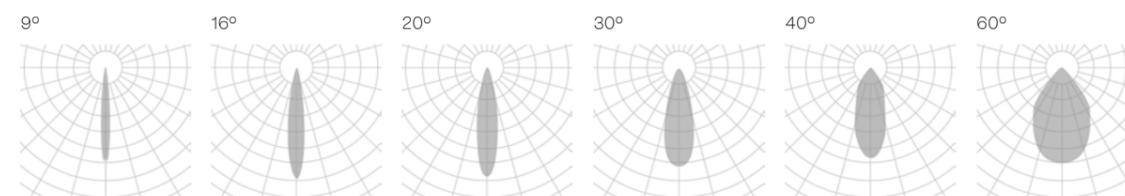


The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

MARTORELL SQ

SQ

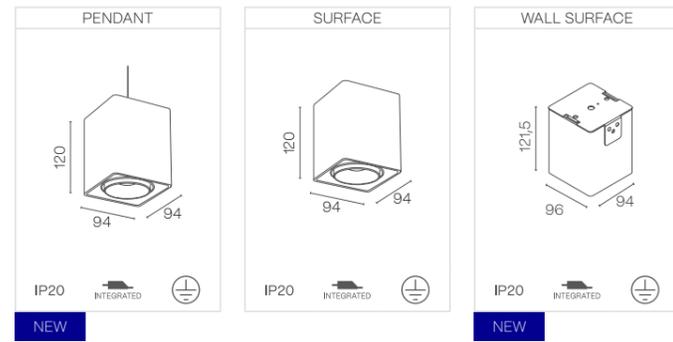

SQ DOUBLE

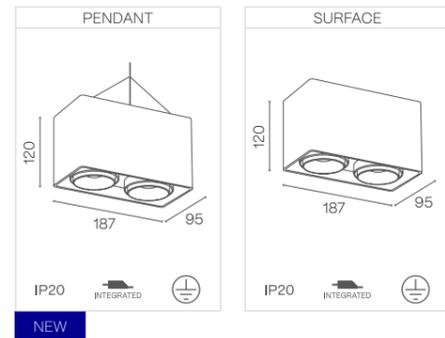


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL SQ

POWER STANDARD

		SQ	SQ DOUBLE
		350 mA 11 W 720 - 759 - 908 lm	700 mA 22 W 1440 - 1518 - 1816 lm
15°	2700 K	340EB 122	341EB 122
	3000 K	340EB 123	341EB 123
	4000 K	340EB 125	341EB 125
25°	2700 K	340EB 142	341EB 142
	3000 K	340EB 143	341EB 143
	4000 K	340EB 145	341EB 145
38°	2700 K	340EB 152	341EB 152
	3000 K	340EB 153	341EB 143
	4000 K	340EB 155	341EB 145

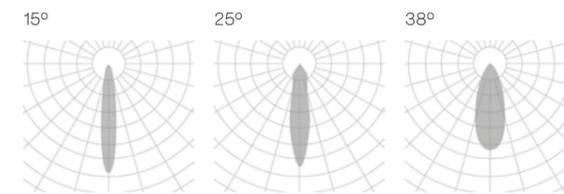


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 7 · Wall surface
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

MARTORELL TÁRREGA

Ø92/Ø85

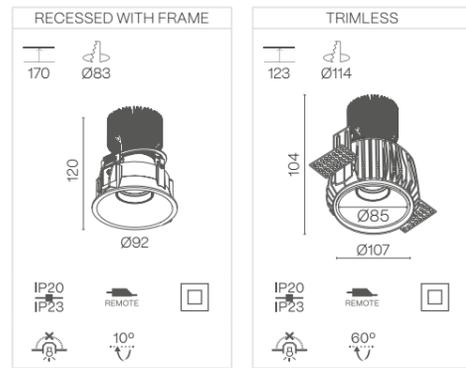


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Wireless control options

MARTORELL TÁRREGA

POWER STANDARD

		Ø92/Ø85	
25°	500 mA	10 W	659 - 691 - 719 lm
	2700 K	342EB 142	
	3000 K	342EB 143	
30°	4000 K	342EB 145	
	2700 K	342EB 152	
	3000 K	342EB 153	
	4000 K	342EB 155	

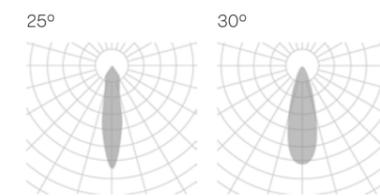


The data shown corresponds to raw values.


- INSTALLATION**
- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 4 · Recessed with frame
- 5 · Trimless
- FINISH**
- B · Black
- W · White
- G · Black - white
- H · White - black
- I · White - special color
- J · Black - special color
- DIMM OPTIONS**
- O · On-Off
- D · Dali
- P · Push
- Down light

MARTORELL TUBULAR


Ø20 - H600

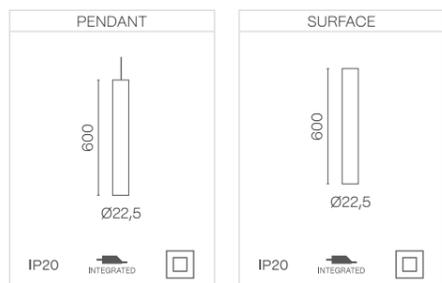


Ø20 - H1000

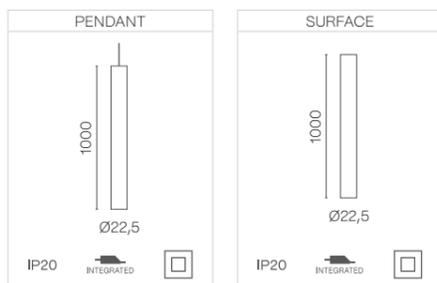


Ø20 - H870 TILT

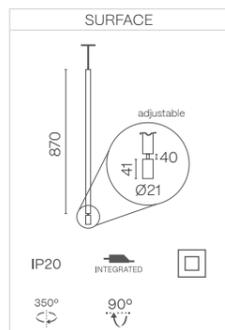


Ø40 - H400

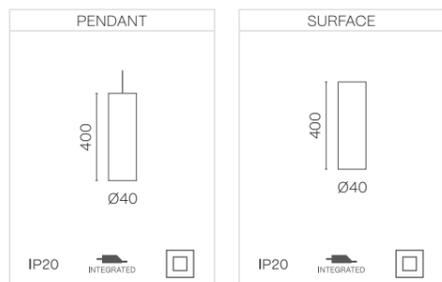


Ø40 - H600

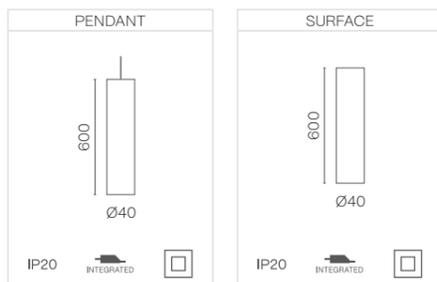

Ø60 - H400

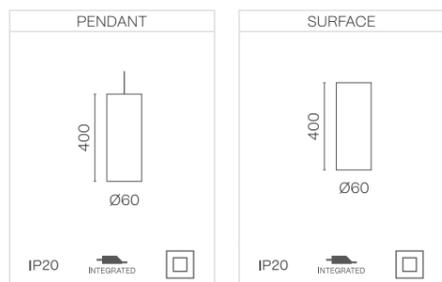

Ø60 - H600

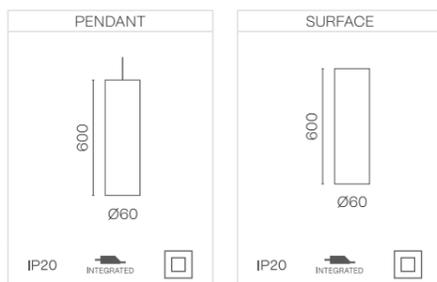

ON DEMAND OPTIONS




MARTORELL TUBULAR

POWER STANDARD

		Ø20 - H600	Ø20 - H1000			Ø20 - H870 TILT
20°	300 mA	3 W 174 - 187 - 212 lm	3 W 174 - 187 - 212 lm	700 mA	3 W 164 - 155 - 188 lm	
	2700 K	346EB 132	346EE 132		2700 K	349EB3 132
	3000 K	346EB 133	346EE 133		3000 K	349EB3 133
40°	4000 K	346EB 135	346EE 135	4000 K	349EB3 135	
	2700 K	346EB 152	346EE 152	40°	2700 K	349EB3 152
	3000 K	346EB 153	346EE 153		3000 K	349EB3 153
4000 K	346EB 155	346EE 155	4000 K		349EB3 155	

		Ø40 - H400	Ø40 - H600
20°	350 mA	14 W 954 - 991 - 1067 lm	14 W 954 - 991 - 1067 lm
	2700 K	347EB 132	347EE 132
	3000 K	347EB 133	347EE 133
40°	4000 K	347EB 135	347EE 135
	2700 K	347EB 152	347EE 152
	3000 K	347EB 153	347EE 153
	4000 K	347EB 155	347EE 155

		Ø60 - H400	Ø60 - H600
20°	350 mA	21W 1662 - 1716 - 1729 lm	21W 1662 - 1716 - 1729 lm
	2700 K	348EB 132	348EE 132
	3000 K	348EB 133	348EE 133
40°	4000 K	348EB 135	348EE 135
	2700 K	348EB 152	348EB 152
	3000 K	348EB 153	348EB 153
	4000 K	348EB 155	348EB 155

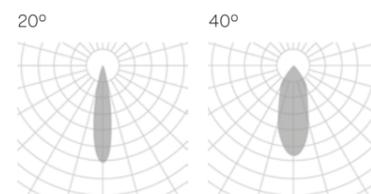

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 3 · Surface

FINISH

- B · Black
- W · White
- G · Black - white
- H · White - black
- I · White - special color
- J · Black - special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push



PATRICIA FAMILY



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL

INDOOR

220-240 V
50-60 Hz

CE

PATRICIA

Ø45

SURFACE	RECESSED WITH FRAME	TRACKLIGHT
130 Ø45	45 Ø60 Ø65 Ø22 130 Ø45	160 10 40 130 Ø45
IP20 INTEGRATED	IP20 IP20 REMOTE	IP20 INTEGRATED
350° 90°	350° 90°	350° 90°
NEW	NEW	

Ø55

SURFACE	RECESSED WITH FRAME	TRACKLIGHT
150 Ø55	45 Ø70 Ø75 Ø22 150 Ø55	160 10 40 150 Ø55
IP20 INTEGRATED	IP20 IP20 REMOTE	IP20 INTEGRATED
350° 90°	350° 90°	350° 90°
NEW	NEW	

Dimmable drivers are supplied remote.


Ø69

SURFACE	RECESSED WITH FRAME	TRACKLIGHT
170 Ø69	45 Ø84 Ø89 Ø22 170 Ø69	160 10 40 170 Ø69
IP20 INTEGRATED	IP20 IP20 REMOTE	IP20 INTEGRATED
350° 90°	350° 90°	350° 90°
NEW	NEW	

Ø82

SURFACE	RECESSED WITH FRAME	TRACKLIGHT
190 Ø82	45 Ø97 Ø102 Ø22 190 Ø82	160 10 40 190 Ø82
IP20 INTEGRATED	IP20 IP20 REMOTE	IP20 INTEGRATED
350° 90°	350° 90°	350° 90°
NEW	NEW	

Rotation mechanism detail

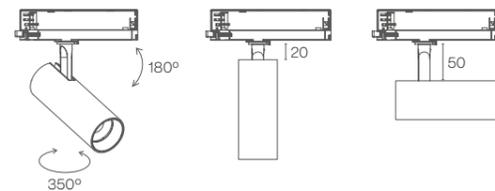

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

- DIMM OPTIONS ONLY TRACKLIGHT**
- O** · On-Off
- D** · Dali
- F** · Phase cut

PATRICIA

ACCESORIES

BARN DOOR	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.BD
	Ø55	ACC30514.02.BD
	Ø69	ACC30514.03.BD
	Ø82	ACC30514.04.BD

CROSS RING	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.CR
	Ø55	ACC30514.02.CR
	Ø69	ACC30514.03.CR
	Ø82	ACC30514.04.CR

HONEY COMB	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.HC
	Ø55	ACC30514.02.HC
	Ø69	ACC30514.03.HC
	Ø82	ACC30514.04.HC

SNOOT	DIMENSIONS	REFERENCE
	Ø45	A355M.01.XRRX
	Ø55	A355M.02.XRRX
	Ø69	A355M.03.XRRX
	Ø82	A355M.04.XRRX

SNOOT ASYMETRIC	DIMENSIONS	REFERENCE
	Ø45	A355M.01.XORX
	Ø55	A355M.02.XORX
	Ø69	A355M.03.XORX
	Ø82	A355M.04.XORX

- FINISH**
- B** · Black
- W** · White

OVAL FLOOD LENSE

OVAL FLOOD LENSE		DIMENSIONS		REFERENCE		DIMENSIONS		REFERENCE	
		Ø45	ACC30514.01.OV.03X60			Ø45	ACC30514.01.OV.60X10		
		Ø55	ACC30514.02.OV.03X60			Ø55	ACC30514.02.OV.60X10		
		Ø69	ACC30514.03.OV.03X60			Ø69	ACC30514.03.OV.60X10		
		Ø82	ACC30514.04.OV.03X60			Ø82	ACC30514.04.OV.60X10		
		Ø45	ACC30514.01.OV.10X40			Ø45	ACC30514.01.OV.15X60		
		Ø55	ACC30514.02.OV.10X40			Ø55	ACC30514.02.OV.15X60		
		Ø69	ACC30514.03.OV.10X40			Ø69	ACC30514.03.OV.15X60		
		Ø82	ACC30514.04.OV.10X40			Ø82	ACC30514.04.OV.15X60		

ZOOM SPOT LENSE

ZOOM SPOT LENSE		DIMENSIONS		REFERENCE		DIMENSIONS		REFERENCE	
		Ø45	ACC30514.01.ZSX1.3			Ø45	ACC30514.01.ZSX1.5		
		Ø55	ACC30514.02.ZSX1.3			Ø55	ACC30514.02.ZSX1.5		
		Ø69	ACC30514.03.ZSX1.3			Ø69	ACC30514.03.ZSX1.5		
		Ø82	ACC30514.04.ZSX1.3			Ø82	ACC30514.04.ZSX1.5		
		Ø45	ACC30514.01.ZSX2			Ø45	ACC30514.01.ZSX3		
		Ø55	ACC30514.02.ZSX2			Ø55	ACC30514.02.ZSX3		
		Ø69	ACC30514.03.ZSX2			Ø69	ACC30514.03.ZSX3		
		Ø82	ACC30514.04.ZSX2			Ø82	ACC30514.04.ZSX3		

POWER STANDARD


		Ø45		Ø55		Ø69		Ø82	
24°	2700 K	250 mA	8 W	350 mA	12 W	600 mA	19 W	1050 mA	35 W
	3000 K	1223 - 1239 - 1295 lm		1846 - 1876 - 1964 lm		3235 - 3291 - 3434 lm		5905 - 6022 - 6477 lm	
	4000 K	355EB	142	355EE	142	355EH	122	355EJ	122
36°	2700 K	355EB	152	355EE	152	355EH	142	355EJ	142
	3000 K	355EB	153	355EE	153	355EH	143	355EJ	143
	4000 K	355EB	155	355EE	155	355EH	145	355EJ	145
50°	2700 K	355EB	162	355EE	162	355EH	152	355EJ	152
	3000 K	355EB	163	355EE	163	355EH	153	355EJ	153
	4000 K	355EB	165	355EE	165	355EH	155	355EJ	155

POWER HIGH

		Ø69	
24°	800 mA	27 W	4507 - 4586 - 4785 lm
	2700 K	355EH	322
	3000 K	355EH	323
36°	2700 K	355EH	342
	3000 K	355EH	343
	4000 K	355EH	345
45°	2700 K	355EH	352
	3000 K	355EH	353
	4000 K	355EH	355
55°	2700 K	355EH	362
	3000 K	355EH	363
	4000 K	355EH	365

CLEAR WHITE

		Ø69		Ø82	
15°	POWER STANDARD	600 mA	21 W	750 mA	27 W
		2738 - 2835 lm		3346 - 3465 lm	
	3000 K	355EH	12Q	355EH	32Q
24°	3000 K	355EH	12R	355EH	32R
	4000 K	355EH	12R	355EH	32R
	3000 K	355EH	13Q	355EH	33Q
36°	3000 K	355EH	13R	355EH	33R
	4000 K	355EH	13R	355EH	33R
	3000 K	355EH	15Q	355EH	35Q
50°	3000 K	355EH	15R	355EH	35R
	4000 K	355EH	15R	355EH	35R
	3000 K	355EH	16Q	355EH	36Q
50°	3000 K	355EH	16R	355EH	36R
	4000 K	355EH	16R	355EH	36R

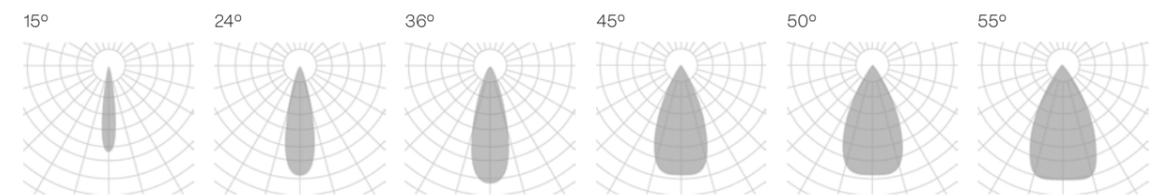

The data shown corresponds to raw values.

- INSTALLATION**
3 · Surface
5 · Recessed with frame
9 · Tracklight
- FINISH**
B · Black
W · White
S · Special color
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
F · Phase cut
- Down light




KLIMT FAMILY



- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000h
- DIM
OPTIONAL
-
- INDOOR
- 220-240 V
50-60 Hz
- CE
- RoHS


KLIMT

Ø75

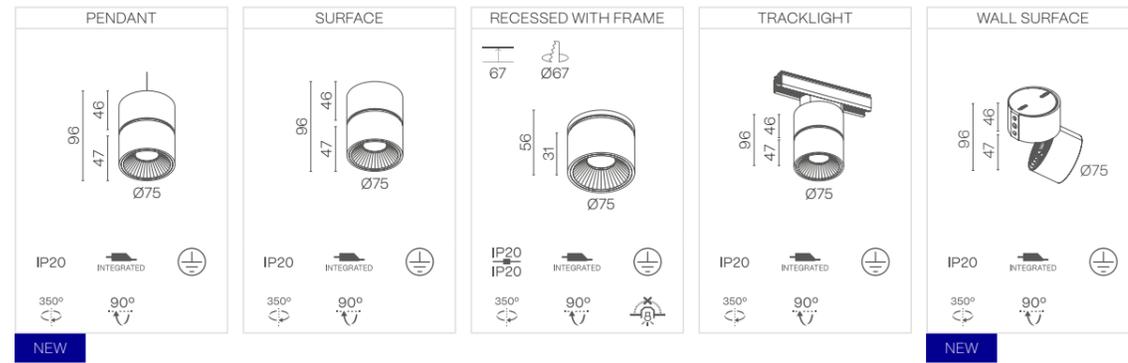


DIMM 1.10 V driver always supplied remote.
Integrated DALI operates at 500 mA.

Ø100

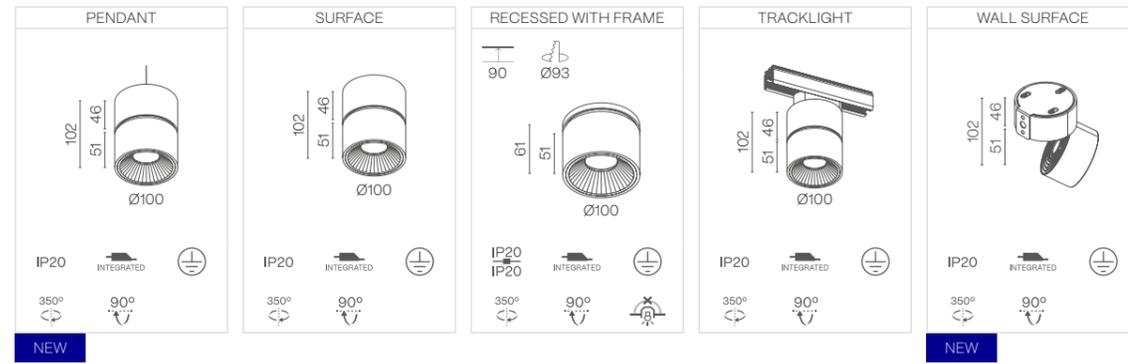

DIMM 1.10 V driver always supplied remote.

Ø125

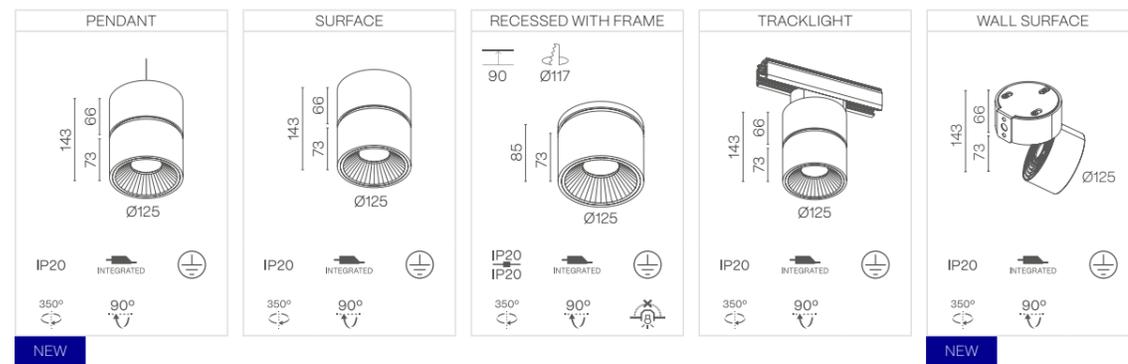

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Wireless control options

- DIMM OPTIONS ONLY TRACKLIGHT**
- O** · On-Off
 - D** · Dali
 - F** · Phase cut

KLIMT

POWER STANDARD

		Ø75	Ø100	Ø125
		700 mA 6 W 822 - 840 - 875 lm	350 mA 12 W 1735 - 1766 - 1844 lm	700 mA 23 W 3549 - 3611 - 3769 lm
15°	2700 K	320EB 122	320EE 122	320EH 122
	3000 K	320EB 123	320EE 123	320EH 123
	4000 K	320EB 125	320EE 125	320EH 125
24°	2700 K	320EB 142	320EE 142	320EH 142
	3000 K	320EB 143	320EE 143	320EH 143
	4000 K	320EB 145	320EE 145	320EH 145
38°	2700 K	320EB 152	320EE 152	320EH 152
	3000 K	320EB 153	320EE 153	320EH 153
	4000 K	320EB 155	320EE 155	320EH 155
60°	2700 K	-	320EE 172	320EH 172
	3000 K	-	320EE 173	320EH 173
	4000 K	-	320EE 175	320EH 175

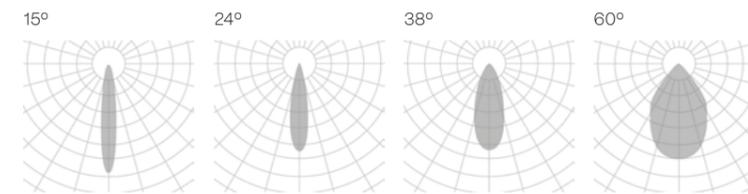

The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 5 · Recessed with frame
 - 7 · Wall surface
 - 9 · Tracklight
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
 - F · Phase cut
- Down light

KLIMT FIX

Ø75

PENDANT IP20 INTEGRATED NEW	SURFACE IP20 INTEGRATED	RECESSED WITH FRAME 80 Ø75 46 Ø83 IP20 IP23 REMOTE	WALL SURFACE IP20 INTEGRATED NEW
---	---------------------------------------	--	--

Ø100

PENDANT IP20 INTEGRATED NEW	SURFACE IP20 INTEGRATED	RECESSED WITH FRAME 80 Ø100 50 Ø108 IP20 IP23 REMOTE	WALL SURFACE IP20 INTEGRATED NEW
---	---------------------------------------	--	--

Ø125

PENDANT IP20 INTEGRATED NEW	SURFACE IP20 INTEGRATED	RECESSED WITH FRAME 85 Ø125 72 Ø135 IP20 IP23 REMOTE	WALL SURFACE IP20 INTEGRATED NEW
---	---------------------------------------	--	--

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options


KLIMT FIX

POWER STANDARD

		Ø75	
		700 mA	6 W 822 - 840 - 875 lm
15°	2700 K		321EB 122
	3000 K		321EB 123
	4000 K		321EB 125
24°	2700 K		321EB 142
	3000 K		321EB 143
	4000 K		321EB 145
38°	2700 K		321EB 152
	3000 K		321EB 153
	4000 K		321EB 155

		Ø100	
		350 mA	12 W 1735 - 1766 - 1844 lm
15°	2700 K		321EE 122
	3000 K		321EE 123
	4000 K		321EE 125
25°	2700 K		321EE 142
	3000 K		321EE 143
	4000 K		321EE 145
38°	2700 K		321EE 152
	3000 K		321EE 153
	4000 K		321EE 155
60°	2700 K		321EE 172
	3000 K		321EE 173
	4000 K		321EE 175

		Ø125	
		700 mA	23 W 3549 - 3611 - 3769 lm
15°	2700 K		321EH 122
	3000 K		321EH 123
	4000 K		321EH 125
24°	2700 K		321EH 142
	3000 K		321EH 143
	4000 K		321EH 145
38°	2700 K		321EH 152
	3000 K		321EH 153
	4000 K		321EH 155
60°	2700 K		321EH 172
	3000 K		321EH 173
	4000 K		321EH 175

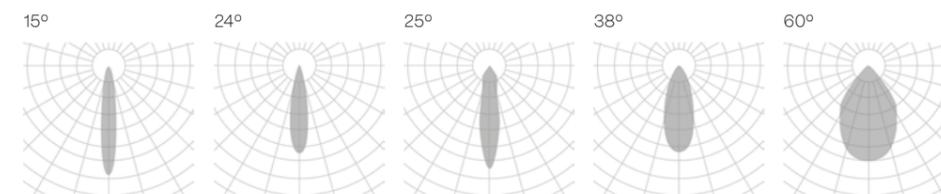

The data shown corresponds to raw values.

- | | | | |
|--|---|---|--------------------|
| <p>INSTALLATION</p> <ul style="list-style-type: none"> 1 · Pendant 3 · Surface 5 · Recessed with frame 7 · Wall surface | <p>FINISH</p> <ul style="list-style-type: none"> B · Black W · White G · Black - white H · White - black I · White - special color J · Black - special color | <p>DIMM OPTIONS</p> <ul style="list-style-type: none"> O · On-Off D · Dali P · Push | <p> Down light</p> |
|--|---|---|--------------------|

CUBE FAMILY



ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL


INDOOR

220-240 V
50-60 Hz


CE

CUBE


CUBE

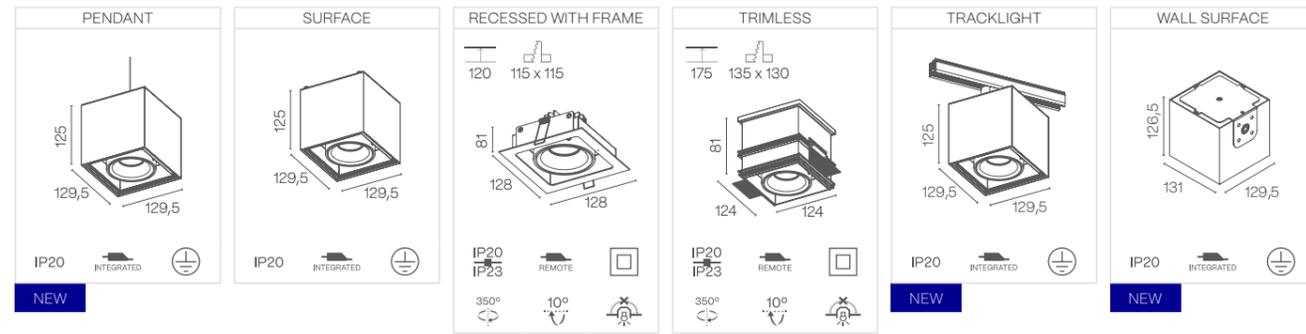

CUBE DOUBLE

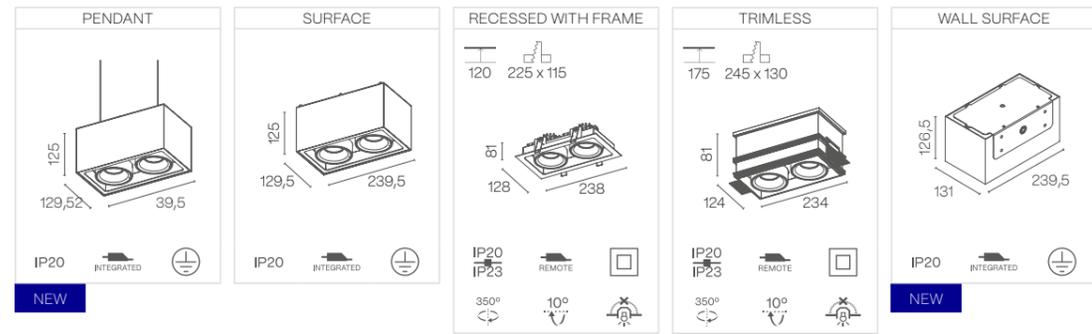

CUBE TRIPLE

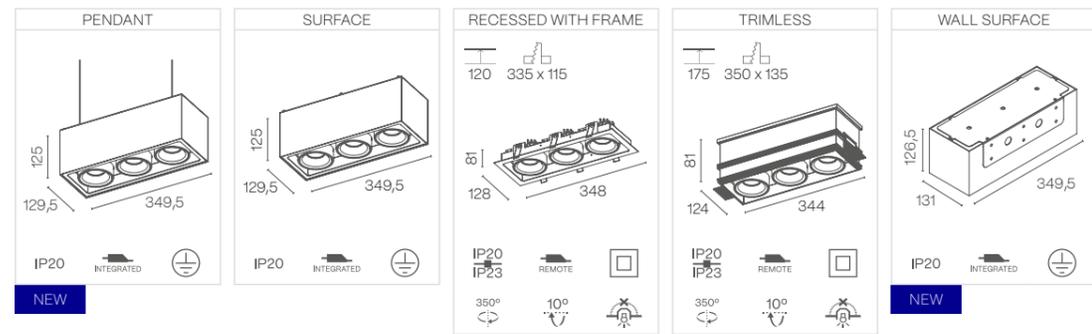

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options


CUBE

POWER STANDARD

		CUBE	CUBE DOUBLE	CUBE TRIPLE
24°	250 mA	8 W 1347 - 1369 - 1432 lm	16 W 2692 - 2738 - 2864 lm	24 W 4038 - 4107 - 4296 lm
	2700 K	309EB 142	310EE 142	311EH 142
	3000 K	309EB 143	310EE 143	311EH 143
40°	4000 K	309EB 145	310EE 145	311EH 145
	2700 K	309EB 152	310EE 152	311EH 152
	3000 K	309EB 153	310EE 153	311EH 153
60°	4000 K	309EB 155	310EE 155	311EH 155
	2700 K	309EB 172	310EE 172	311EH 172
	3000 K	309EB 173	310EE 173	311EH 173
	4000 K	309EB 175	310EE 175	311EH 175

HIGH STANDARD

		CUBE	CUBE DOUBLE	CUBE TRIPLE
24°	500 mA	17 W 2316 - 2354 - 2464 lm	34 W 4630 - 4708 - 4928 lm	51 W 6945 - 7062 - 7392 lm
	2700 K	309EB 342	310EE 342	311EH 342
	3000 K	309EB 343	310EE 343	311EH 343
40°	4000 K	309EB 345	310EE 345	311EH 345
	2700 K	309EB 352	310EE 352	311EH 352
	3000 K	309EB 353	310EE 353	311EH 353
60°	4000 K	309EB 355	310EE 355	311EH 355
	2700 K	309EB 372	310EE 372	311EH 372
	3000 K	309EB 373	310EE 373	311EH 373
	4000 K	309EB 375	310EE 375	311EH 375

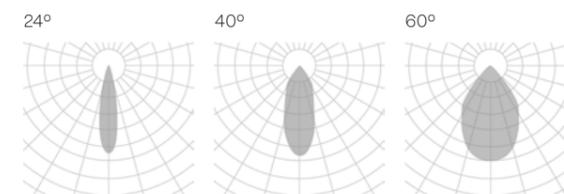


The data shown corresponds to raw values.


- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 7 · Wall surface
 - 9 · Tracklight
- FINISH**
 - B · Black
 - W · White
 - S · Special color
 - H · White - black
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

CUBE TUBE


H185

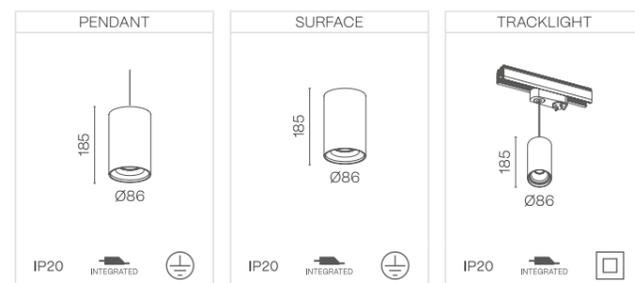


H250

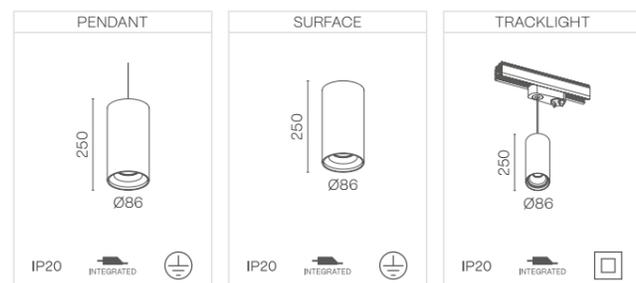


H350

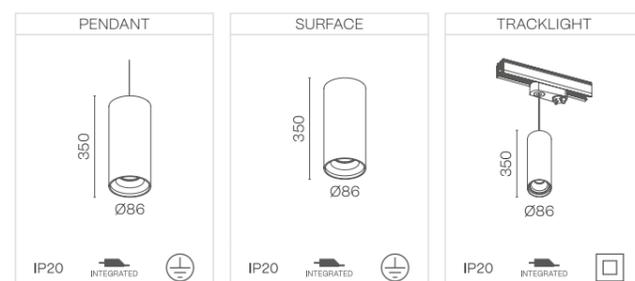

H450

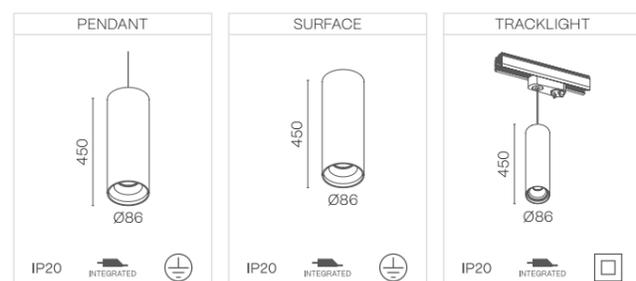

H175

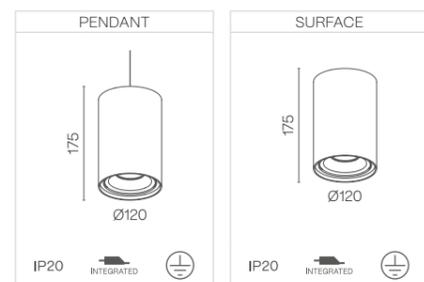

ON DEMAND OPTIONS

Wireless control options


CUBE TUBE

POWER STANDARD

		H185	H250	H350	H450
24°	350 mA	8 W 1358 - 1380 - 1445 lm			
	2700 K	312EB 142	312EE 142	312EH 142	312EJ 142
	3000 K	312EB 143	312EE 143	312EH 143	312EJ 143
40°	4000 K	312EB 145	312EE 145	312EH 145	312EJ 145
	2700 K	312EB 152	312EE 152	312EH 152	312EJ 152
	3000 K	312EB 153	312EE 153	312EH 153	312EJ 153
60°	4000 K	312EB 155	312EE 155	312EH 155	312EJ 155
	2700 K	312EB 172	312EE 172	312EH 172	312EJ 172
	3000 K	312EB 173	312EE 173	312EH 173	312EJ 173
	4000 K	312EB 175	312EE 175	312EH 175	312EJ 175

POWER STANDARD

		H175
24°	500 mA	16 W 2720 - 2767 - 2888 lm
	2700 K	313EB 142
	3000 K	313EB 143
40°	4000 K	313EB 145
	2700 K	313EB 152
	3000 K	313EB 153
60°	4000 K	313EB 155
	2700 K	313EB 172
	3000 K	313EB 173
	4000 K	313EB 175

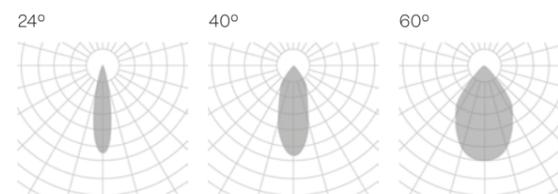

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 3 · Surface
- 9 · Tracklight

FINISH

- B · Black
- W · White
- G · Black - white
- H · White - black
- I · White - special color
- J · Black - special color


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


Down light

CUBE TUBE MOVE


H191

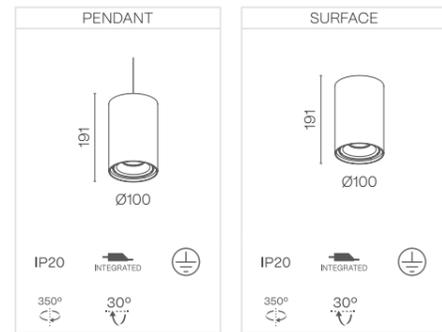


H250

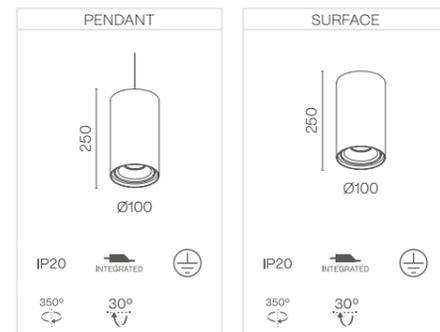


H350

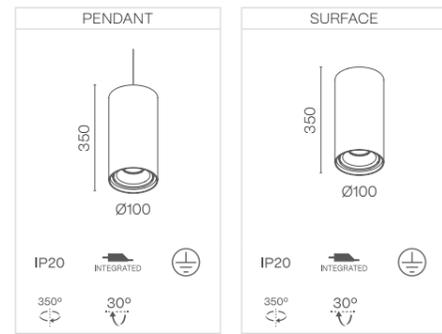

H450

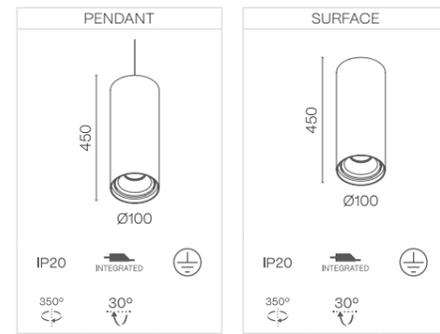

H165

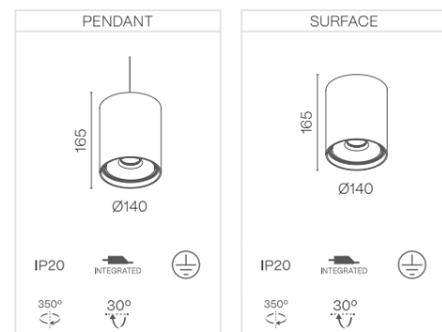

ON DEMAND OPTIONS

- Wireless control options


CUBE TUBE MOVE

POWER STANDARD

		H191	H250	H350	H450
24°	350 mA	11 W 1784 - 1820 - 1866 lm			
	2700 K	314EB 142	314EE 142	314EH 142	314EJ 142
	3000 K	314EB 143	314EE 143	314EH 143	314EJ 143
40°	4000 K	314EB 145	314EE 145	314EH 145	314EJ 145
	2700 K	314EB 152	314EE 152	314EH 152	314EJ 152
	3000 K	314EB 153	314EE 153	314EH 153	314EJ 153
60°	4000 K	314EB 155	314EE 155	314EH 155	314EJ 155
	2700 K	314EB 172	314EE 172	314EH 172	314EJ 172
	3000 K	314EB 173	314EE 173	314EH 173	314EJ 173
	4000 K	314EB 175	314EE 175	314EH 175	314EJ 175

POWER STANDARD

		H165	
24°	350 mA	20 W 2720 - 2767 - 2888 lm	
	2700 K	315EB 142	
	3000 K	315EB 143	
40°	4000 K	315EB 145	
	2700 K	315EB 152	
	3000 K	315EB 153	
60°	4000 K	315EB 155	
	2700 K	315EB 172	
	3000 K	315EB 173	
	4000 K	315EB 175	

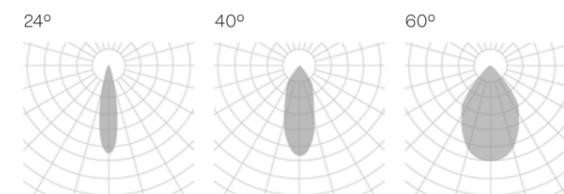

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 3 · Surface

FINISH

- B · Black
- W · White
- G · Black - white
- H · White - black
- I · White - special color
- J · Black - special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push

Down light


LUK FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INDOOR
- 220-240 V 50-60 Hz
- CE

LUK CRUSADER

Ø120

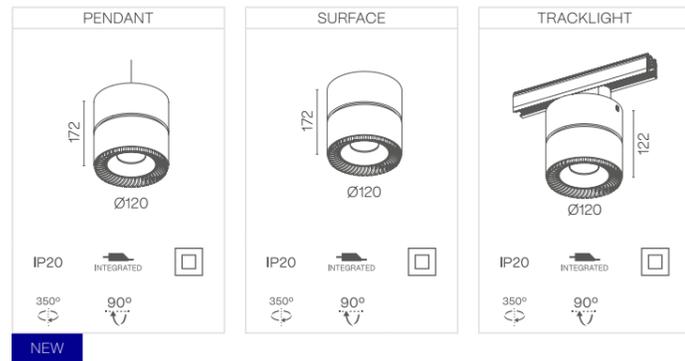

Rotation mechanism detail




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

LUK CRUSADER

POWER STANDARD

		Ø120	
	500 mA	18 W 2273 - 2386 - 2410 lm	
24°	2700 K	330EB 142	
	3000 K	330EB 143	
	4000 K	330EB 145	
40°	2700 K	330EB 152	
	3000 K	330EB 153	
	4000 K	330EB 155	
60°	2700 K	330EB 172	
	3000 K	330EB 173	
	4000 K	330EB 175	

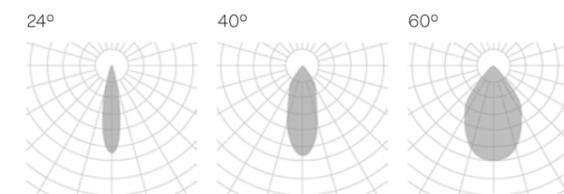


The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 3 · Surface
 - 9 · Tracklight
- FINISH**
 - B · Black
 - W · White
 - H · White - black
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push


Down light

LUK HAWKEYE


HAWKEYE

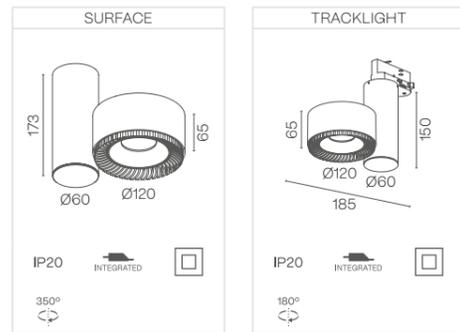

HAWKEYE DOUBLE

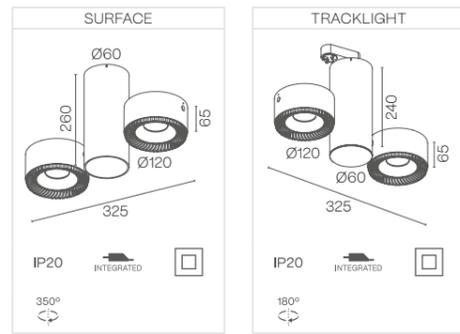

Rotation mechanism detail




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

LUK HAWKEYE

POWER STANDARD


		HAWKEYE	HAWKEYE DOUBLE
24°	500 mA	18 W 2273 - 2386 - 2410 lm	36 W 4546 - 4772 - 4820 lm
	2700 K	331EB 142	332EB 142
	3000 K	331EB 143	332EB 143
40°	4000 K	331EB 145	332EB 145
	2700 K	331EB 152	332EB 152
	3000 K	331EB 153	332EB 153
60°	4000 K	331EB 155	332EB 155
	2700 K	331EB 172	332EB 172
	3000 K	331EB 173	332EB 173
	4000 K	331EB 175	332EB 175

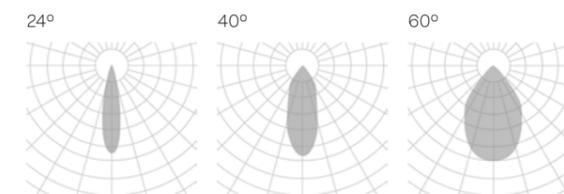

The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - H · White - black
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

ORACLE FAMILY

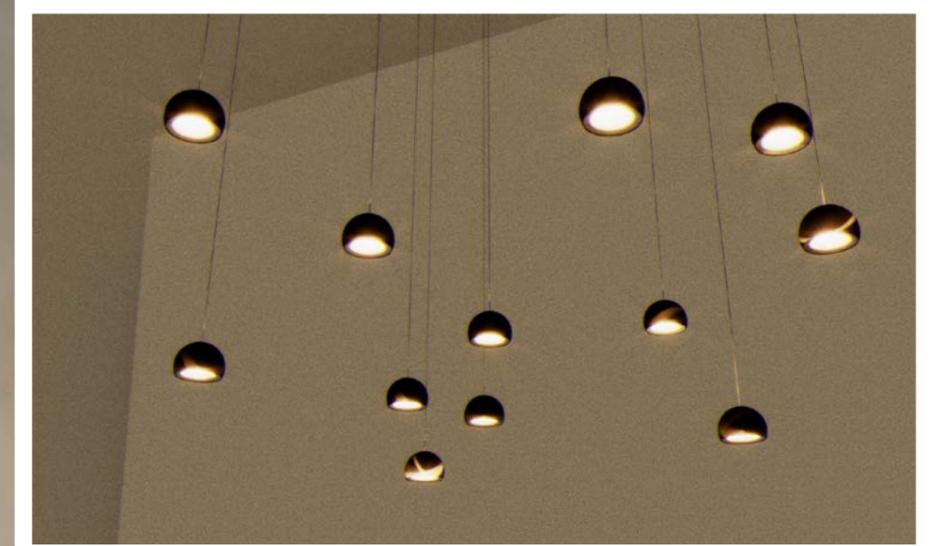

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL


INDOOR

220-240 V
50-60 Hz


CE

ORACLE

Ø132

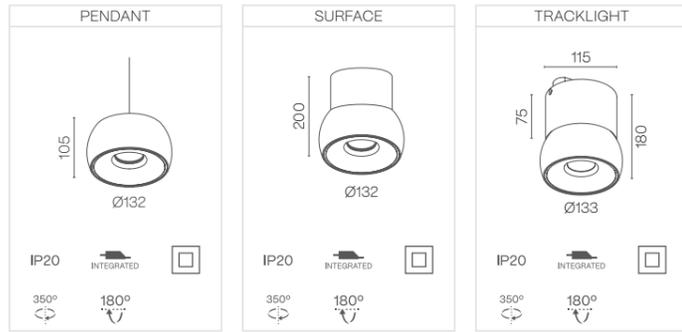

Rotation mechanism detail




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

ORACLE

POWER STANDARD

		Ø132	
500 mA		18 W	
		2273 - 2386 - 2410 lm	
24°	2700 K	354EB 142	
	3000 K	354EB 143	
	4000 K	354EB 145	
40°	2700 K	354EB 152	
	3000 K	354EB 153	
	4000 K	354EB 155	
60°	2700 K	354EB 172	
	3000 K	354EB 173	
	4000 K	354EB 175	

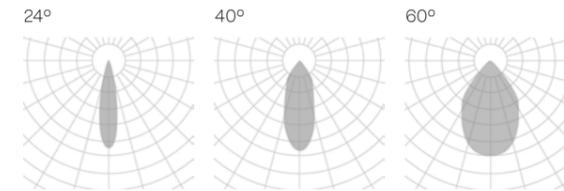

The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push

Down light

LENT FAMILY



- ALUMINIUM PC
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- INDOOR
- 220-240 V 50-60 Hz
- CE

LENT MODULAR

1 LENS

PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	WALL SURFACE
L: 29 mm without cover kit H: 80 mm W: 34 mm	L: 29 mm without cover kit H: 80 mm W: 34 mm	105 38 x 40	77 57 x 45	L: 29 mm without cover kit H: 81,5 mm W: 57 mm
IP40 REMOTE	IP40 REMOTE	IP20 IP43 REMOTE	IP20 IP43 REMOTE	IP40 REMOTE
NEW	NEW			NEW

3 LENSES

PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	WALL SURFACE
L: 80 mm without cover kit H: 80 mm W: 34 mm	L: 80 mm without cover kit H: 80 mm W: 34 mm	105 90 x 40	77 96 x 45	L: 80 mm without cover kit H: 81,5 mm W: 57 mm
IP40 INTEGRATED	IP40 INTEGRATED	IP20 IP43 REMOTE	IP20 IP43 REMOTE	IP40 INTEGRATED
NEW	NEW			NEW

5 LENSES

PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	WALL SURFACE
L: 132 mm without cover kit H: 80 mm W: 34 mm	L: 132 mm without cover kit H: 80 mm W: 34 mm	105 142 x 40	77 148 x 45	L: 132 mm without cover kit H: 81,5 mm W: 57 mm
IP40 INTEGRATED	IP40 INTEGRATED	IP20 IP43 REMOTE	IP20 IP43 INTEGRATED	IP40 INTEGRATED
NEW	NEW			NEW

10 LENSES

PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	WALL SURFACE
L: 262 mm without cover kit H: 80 mm W: 34 mm	L: 262 mm without cover kit H: 80 mm W: 34 mm	105 272 x 40	77 275 x 45	L: 262 mm without cover kit H: 81,5 mm W: 57 mm
IP40 INTEGRATED	IP40 INTEGRATED	IP20 IP43 REMOTE	IP20 IP43 INTEGRATED	IP40 INTEGRATED
NEW	NEW			NEW

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
 - Wireless control options
 - Tracklight on demand

Length cover kit: 3 mm


LENT MODULAR

POWER STANDARD – Round version

		1 LENS	3 LENSES	5 LENSES	10 LENSES
20°	700 mA	2 W 189 - 216 - 232 lm	6 W 566 - 647 - 697 lm	10 W 982 - 1079 - 1161 lm	20 W 1885 - 2158 - 2322 lm
	2700 K	324EB 132	324EH 132	324EL 132	324EV 132
	3000 K	324EB 133	324EH 133	324EL 133	324EV 133
40°	4000 K	324EB 135	324EH 135	324EL 135	324EV 135
	2700 K	324EB 152	324EH 152	324EL 152	324EV 152
	3000 K	324EB 153	324EH 153	324EL 153	324EV 153
60°	4000 K	324EB 155	324EH 155	324EL 155	324EV 155
	2700 K	324EB 172	324EH 172	324EL 172	324EV 172
	3000 K	324EB 173	324EH 173	324EL 173	324EV 173
	4000 K	324EB 175	324EH 175	324EL 175	324EV 175

POWER STANDARD – Square version

		1 LENS	3 LENSES	5 LENSES	10 LENSES
20°	700 mA	2 W 189 - 216 - 232 lm	6 W 566 - 647 - 697 lm	10 W 982 - 1079 - 1161 lm	20 W 1885 - 2158 - 2322 lm
	2700 K	325EB 132	325EH 132	325EL 132	325EV 132
	3000 K	325EB 133	325EH 133	325EL 133	325EV 133
40°	4000 K	325EB 135	325EH 135	325EL 135	325EV 135
	2700 K	325EB 152	325EH 152	325EL 152	325EV 152
	3000 K	325EB 153	325EH 153	325EL 153	325EV 153
60°	4000 K	325EB 155	325EH 155	325EL 155	325EV 155
	2700 K	325EB 172	325EH 172	325EL 172	325EV 172
	3000 K	325EB 173	325EH 173	325EL 173	325EV 173
	4000 K	325EB 175	325EH 175	325EL 175	325EV 175

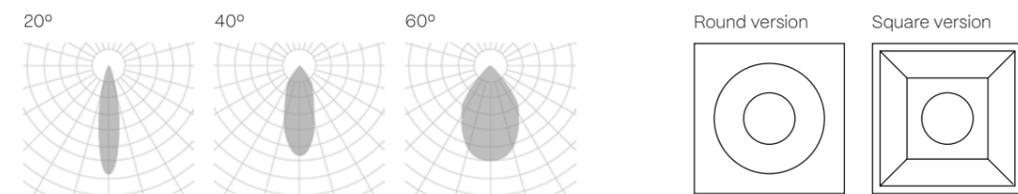


The data shown corresponds to raw values.


- INSTALLATION**
 - Pendant
 - Pendant up light
 - Surface
 - Recessed with frame
 - Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

LENT MOTION


3 LENSES

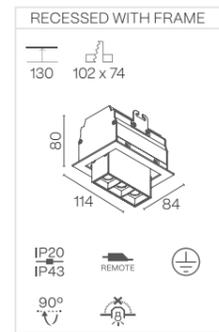

5 LENSES

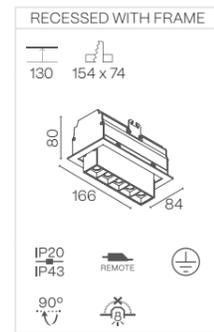

10 LENSES

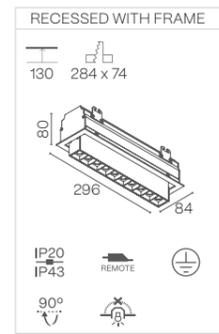

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options


LENT MOTION

POWER STANDARD – Round version

		1 LENS	3 LENSES	5 LENSES	10 LENSES	
20°	700 mA	2 W 189 - 216 - 232 lm	6 W 566 - 647 - 697 lm	10 W 982 - 1079 - 1161 lm	20 W 1885 - 2158 - 2322 lm	
	2700 K	326EB 132	326EH 132	326EL 132	326EV 132	
	3000 K	326EB 133	326EH 133	326EL 133	326EV 133	
	4000 K	326EB 135	326EH 135	326EL 135	326EV 135	
	40°	2700 K	326EB 152	326EH 152	326EL 152	326EV 152
		3000 K	326EB 153	326EH 153	326EL 153	326EV 153
		4000 K	326EB 155	326EH 155	326EL 155	326EV 155
	60°	2700 K	326EB 172	326EH 172	326EL 172	326EV 172
		3000 K	326EB 172	326EH 172	326EL 172	326EV 172
4000 K		326EB 172	326EH 172	326EL 172	326EV 172	

POWER STANDARD – Square version

		1 LENS	3 LENSES	5 LENSES	10 LENSES	
20°	700 mA	2 W 189 - 216 - 232 lm	6 W 566 - 647 - 697 lm	10 W 982 - 1079 - 1161 lm	20 W 1885 - 2158 - 2322 lm	
	2700 K	327EB 132	327EH 132	327EL 132	327EV 132	
	3000 K	327EB 133	327EH 133	327EL 133	327EV 133	
	4000 K	327EB 135	327EH 135	327EL 135	327EV 135	
	40°	2700 K	327EB 152	327EH 152	327EL 152	327EV 152
		3000 K	327EB 153	327EH 153	327EL 153	327EV 153
		4000 K	327EB 155	327EH 155	327EL 155	327EV 155
	60°	2700 K	327EB 172	327EH 172	327EL 172	327EV 172
		3000 K	327EB 172	327EH 172	327EL 172	327EV 172
4000 K		327EB 172	327EH 172	327EL 172	327EV 172	

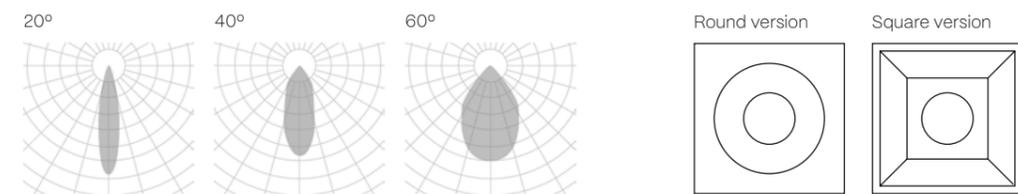

The data shown corresponds to raw values.

- INSTALLATION**
 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 4 · Recessed with frame
 - 5 · Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black - white
 - H · White - black
 - I · White - special color
 - J · Black - special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

ASTRA FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE
- IP20 IP23


ASTRA

NEW


Ø12

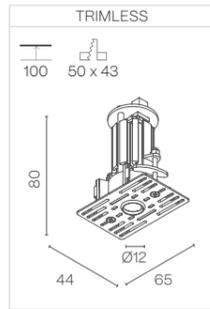

Ø22

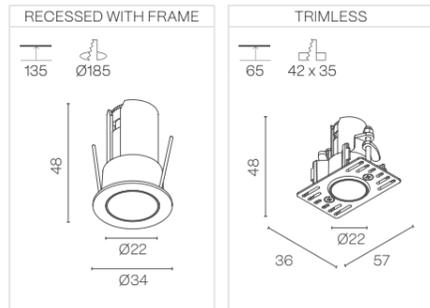

Ø30

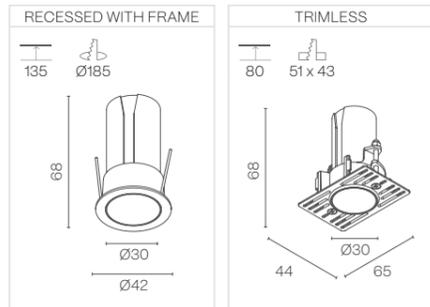

ON DEMAND OPTIONS

Wireless control options


ASTRA

POWER STANDARD

		Ø12	Ø22	Ø30
20°	700 mA	700 mA 3 W 251 - 296 - 319 lm	700 mA 3 W 264 - 278 - 328 lm	300 mA 5 W 710 - 736 - 751 lm
	2700 K	-	302EE B S V 132	302EH B S V 132
	3000 K	-	302EE B S V 133	302EH B S V 133
30°	4000 K	-	302EE B S V 135	302EH B S V 135
	2700 K	302EE B S V 132	-	302EH B S V 132
	3000 K	302EE B S V 133	-	302EH B S V 133
50°	4000 K	302EE B S V 135	-	302EH B S V 135
	2700 K	302EB6 B S V 162	302EE6 B S V 162	302EH6 B S V 162
	3000 K	302EB6 B S V 163	302EE6 B S V 163	302EH6 B S V 163
	4000 K	302EB6 B S V 165	302EE6 B S V 165	302EH6 B S V 165

		Ø12
10°	700 mA	3 W 140 - 147 - 155 lm
	2700 K	302EB6 B S V 112
	3000 K	302EB6 B S V 113
	4000 K	302EB6 B S V 115

		Ø12
Asymmetric	700 mA	3 W 249 - 262 - 275 lm
	2700 K	302EB6 B S V 182
	3000 K	302EB6 B S V 183
	4000 K	302EB6 B S V 185

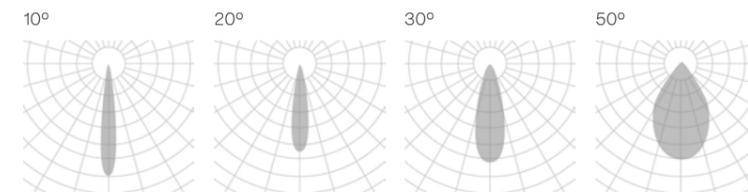

The data shown corresponds to raw values.

Down light

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On-Off
D · Dali
P · Push
V · 1.10

VIO FAMILY

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL









INDOOR

220-240 V
50-60 Hz

CE







FRAMES

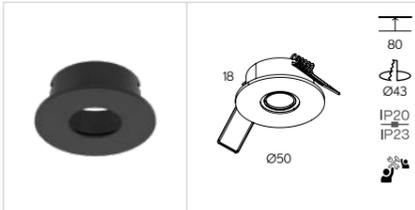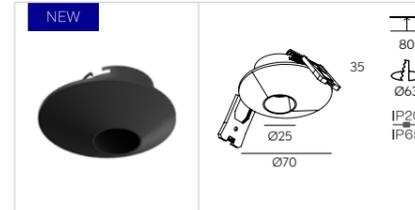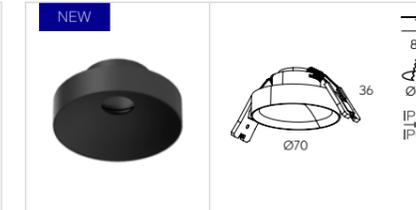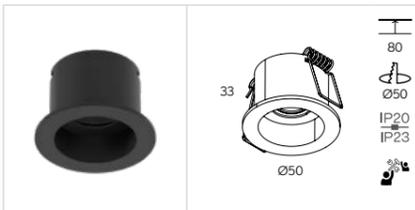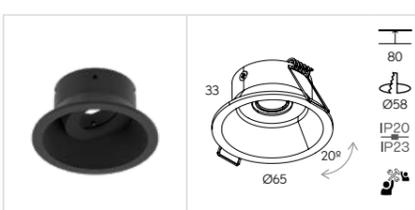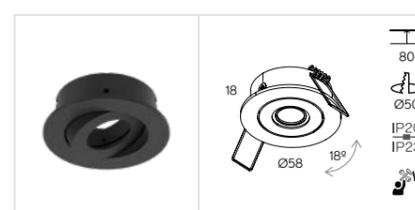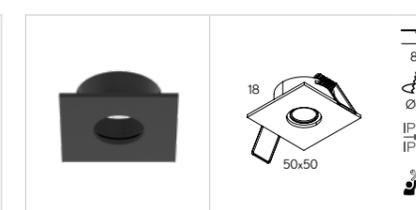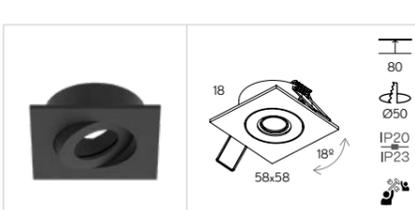 VIO 370	 VIO ASYMETRIC 371	 VIO COMPACT 372
 VIO DEEP 373	 VIO DEEP MOVE 374	 VIO DOME 375
 VIO DOME MOVE 376	 VIO MOVE 378	 VIO SQ 379
 VIO SQUARE MOVE 380		

IP65 on demand


VIO LED

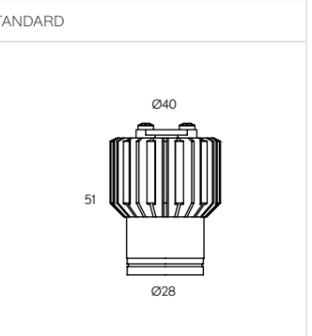
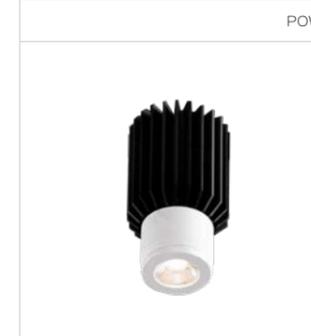
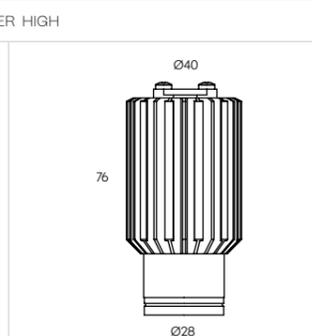
POWER STANDARD		POWER HIGH	
			




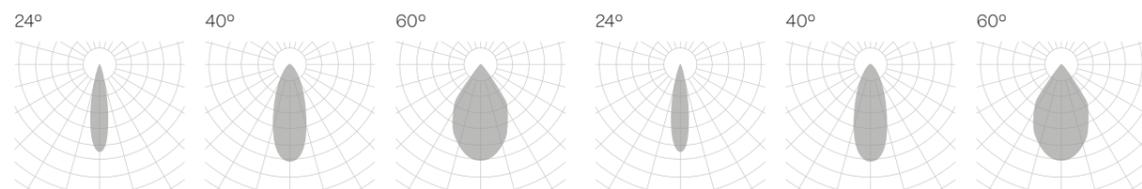


TECHNICAL DATA

						
700 mA	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	
POWER STANDARD	2700 K	370EB5 1A 2	371EB5 1A 2	372EB5 1A 2	373EB5 1A 2	374EB5 1A 2
	3000 K	370EB5 1A 3	371EB5 1A 3	372EB5 1A 3	373EB5 1A 3	374EB5 1A 3
	4000 K	370EB5 1A 5	371EB5 1A 5	372EB5 1A 5	373EB5 1A 5	374EB5 1A 5

						
700 mA	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	3 W 355 - 395 - 411 lm	
POWER STANDARD	2700 K	375EB5 1A 2	376EB5 1A 2	378EB5 1A 2	379EB5 1A 2	380EB5 1A 2
	3000 K	375EB5 1A 3	376EB5 1A 3	378EB5 1A 3	379EB5 1A 3	380EB5 1A 3
	4000 K	375EB5 1A 5	376EB5 1A 5	378EB5 1A 5	379EB5 1A 5	380EB5 1A 5

						
700 mA	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	
POWER HIGH	2700 K	370EB5 3A 2	371EB5 1A 2	372EB5 3A 2	373EB5 3A 2	374EB5 3A 2
	3000 K	370EB5 3A 3	371EB5 1A 3	372EB5 3A 3	373EB5 3A 3	374EB5 3A 3
	4000 K	370EB5 3A 5	371EB5 1A 5	372EB5 3A 5	373EB5 3A 5	374EB5 3A 5

						
700 mA	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	3 W 669 - 722 - 774 lm	
POWER HIGH	2700 K	375EB5 3A 2	376EB5 3A 2	378EB5 3A 2	379EB5 3A 2	380EB5 3A 2
	3000 K	375EB5 3A 3	376EB5 3A 3	378EB5 3A 3	379EB5 3A 3	380EB5 3A 3
	4000 K	375EB5 3A 5	376EB5 3A 5	378EB5 3A 5	379EB5 3A 5	380EB5 3A 5

	DRVL VIO DRIVERS		DRVL VIO DRIVERS		
POWER STANDARD	2 - 3 VIO	DRVL.01.ST	POWER HIGH	1 - 3 VIO	DRVL.01.HI
	4 - 9 VIO	DRVL.02.ST		4 - 8 VIO	DRVL.02.HI
	10 - 15 VIO	DRVL.03.ST		-	-

The dimmable driver dimensions are larger than the cut-out hole. Dimming options require the combination of a minimum of two luminaires. The "DRVL.ST" dimming options require the combination of a minimum of two luminaires. The data shown corresponds to raw values.


<p>FINISH</p> <ul style="list-style-type: none"> B · Black W · White S · Special color 	<p>OPTIC OPTIONS FOR STANDARD</p> <ul style="list-style-type: none"> 1 · 9° 2 · 12° 4 · 30° 	<p>OPTIC OPTIONS FOR HIGH</p> <ul style="list-style-type: none"> 3 · 16° 4 · 24° 5 · 38° 	<p>DIMM OPTIONS</p> <ul style="list-style-type: none"> D · Dali P · Push V · 1.10v 	<p>ON DEMAND OPTIONS</p> <ul style="list-style-type: none"> Wireless control options Down light
--	---	--	--	--

SASSY FAMILY




SASSY ROUND, SMALL DIMENSION


SASSY ROUND RING PARTS

WHITE FINISH RING	BLACK FINISH RING	CHROME FINISH RING	SKETCH
			
360			

RECESSED WITH FRAME

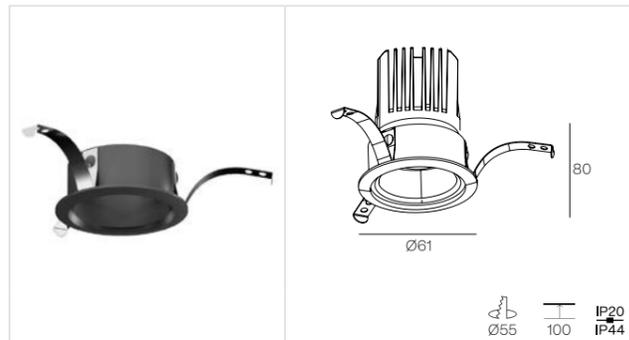

TRIMLESS

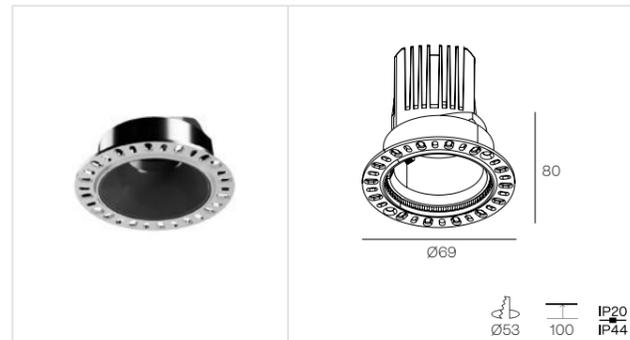

SASSY 8°: IP20/20

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
-  Wireless control options

TECHNICAL DATA

POWER STANDARD

		1300 mA 3 W	.00 SASSY ROUND + ROUND RING
8°	2700 K	300 lm	360EA   112 
	3000 K	315 lm	360EA   113 
	4000 K	372 lm	360EA   115 

		200 mA 7 W	.00 SASSY ROUND + ROUND RING
20° - 36°	2700 K	1000 lm	360EA   1  2 
	3000 K	1013 lm	360EA   1  3 
	4000 K	1059 lm	360EA   1  5 

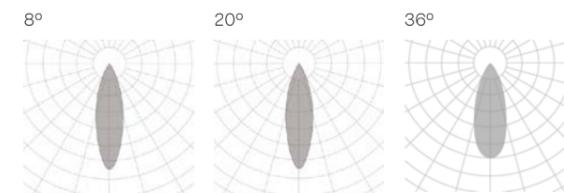

The data shown corresponds to raw values.

SASSY ROUND + MODEL 1

-  **BLACK BASE COLOR + FINISH RING**
- B** · Black + Black
 - G** · Black + White
 - J** · Black + Chrome

-  **WHITE BASE COLOR + FINISH RING**
- H** · White + Black
 - W** · White + White
 - I** · White + Chrome

-  **INSTALLATION**
- 5** · Recessed with frame
 - 6** · Trimless

-  **DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v
 - F** · Phase cut

-  **BEAM ANGLE**
- 2** · 8°
 - 4** · 20°
 - 5** · 36°

SASSY ROUND, BIG DIMENSION


SASSY ROUND RING PARTS

WHITE FINISH RING	BLACK FINISH RING	CHROME FINISH RING	MAT SILVER FINISH RING	GRAFITE FINISH RING	SKETCH
360					

OTHER SASSY RING PARTS - Available only in white-white or black-white finish



SASSY SNOOT RING	SKETCH	SASSY OVAL HOLE RING	SKETCH	SASSY ROUND HOLE RING	SKETCH
362		363		364	

RECESSED WITH FRAME

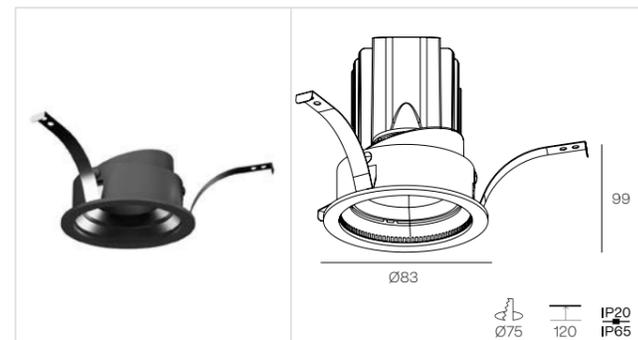

SASSY 8°: IP20/44

TRIMLESS

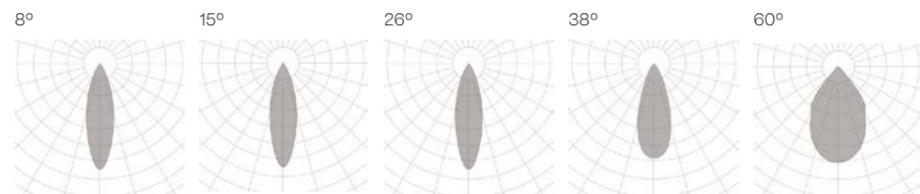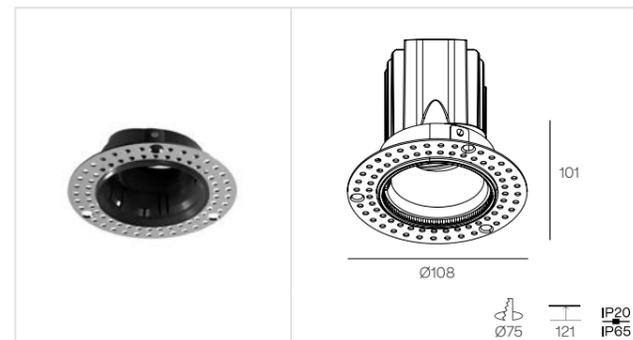

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

TECHNICAL DATA

POWER STANDARD

POWER STANDARD	TEMPERATURE	CURRENT	WATTAGE	LUMENS	.01	.01	.01	.01
					SASSY ROUND + ROUND RING	SASSY ROUND + SASSY SNOOT RING	SASSY ROUND + SASSY OVAL HOLE RING	SASSY ROUND + SASSY ROUND HOLE RING
POWER STANDARD	2700 K	250 mA	8 W	1325 lm	360EB	362EB	363EB	364EB
	3000 K	250 mA	8 W	1342 lm	360EB	362EB	363EB	364EB
	4000 K	250 mA	8 W	1405 lm	360EB	362EB	363EB	364EB
	DWHITE	250 mA	10 W	880 - 3 lm	360EB	362EB	363EB	364EB
POWER MEDIUM	2700 K	350 mA	12 W	1774 lm	360EB	362EB	363EB	364EB
	3000 K	350 mA	12 W	1803 lm	360EB	362EB	363EB	364EB
	4000 K	350 mA	12 W	1888 lm	360EB	362EB	363EB	364EB
	DWHITE	-	-	-	360EB	362EB	363EB	364EB
POWER HIGH	2700 K	500 mA	18 W	2407 lm	360EB	362EB	363EB	364EB
	3000 K	500 mA	18 W	2448 lm	360EB	362EB	363EB	364EB
	4000 K	500 mA	18 W	2563 lm	360EB	362EB	363EB	364EB
	DWHITE	-	-	-	360EB	362EB	363EB	364EB

TEMPERATURE	CURRENT	WATTAGE	LUMENS	.01	.01	.01	.01	
				SASSY ROUND + ROUND RING	SASSY ROUND + SASSY SNOOT RING	SASSY ROUND + SASSY OVAL HOLE RING	SASSY ROUND + SASSY ROUND HOLE RING	
8°	2700 K	700 mA	8 W	606 lm	360EB	362EB	363EB	364EB
	3000 K	700 mA	8 W	652 lm	360EB	362EB	363EB	364EB
	4000 K	700 mA	8 W	661 lm	360EB	362EB	363EB	364EB

The data shown corresponds to raw values.

If the symbols use identical lettering, the desired color must be specified at a later stage.

SASSY ROUND - ROUND RING

- BLACK BASE COLOR + FINISH RING**
 - B · Black + Black
 - G · Black + White
 - J · Black + Chrome
 - J · Black + Grafite
 - J · Black + Mat Silver
- WHITE BASE COLOR + FINISH RING**
 - H · White + Black
 - W · White + White
 - I · White + Chrome
 - I · White + Grafite
 - I · White + Mat Silver

SASSY ROUND - OTHER RINGS


- BLACK BASE COLOR + FINISH RING**
 - B · Black + White
- WHITE BASE COLOR + FINISH RING**
 - W · White + White
- INSTALLATION**
 - 5 · Recessed with frame
 - 6 · Trimless
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
 - F · Phase cut
- BEAM ANGLE**
 - 2 · 15°
 - 4 · 26°
 - 5 · 38°
 - 7 · 60°

SASSY SQ


RING PARTS



RECESSED WITH FRAME

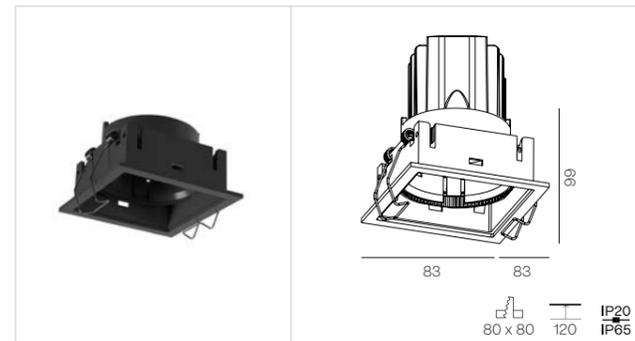

TRIMLESS

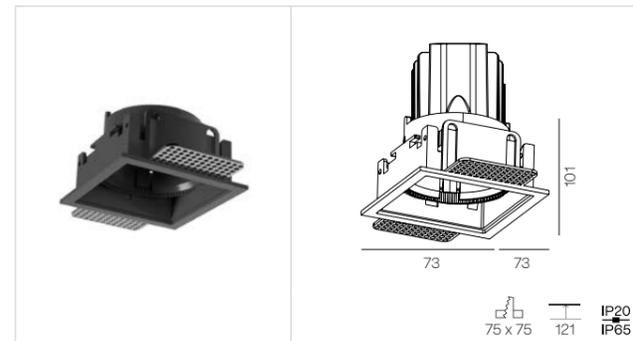


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

TECHNICAL DATA

POWER STANDARD

		SASSY SQUARE + MODEL 1	
POWER STANDARD	2700 K	250 mA 8 W 1325 lm	361EB 1 2
	3000 K	250 mA 8 W 1342 lm	361EB 1 3
	4000 K	250 mA 8 W 1405 lm	361EB 1 5
	D.WHITE	250 mA 10 W 880 - 3 lm	361EB 1 7
POWER MEDIUM	2700 K	350 mA 12 W 1774 lm	361EB 2 2
	3000 K	350 mA 12 W 1803 lm	361EB 2 3
	4000 K	350 mA 12 W 1888 lm	361EB 2 5
	D.WHITE	-	361EB 2 7
POWER HIGH	2700 K	500 mA 18 W 2407 lm	361EB 3 2
	3000 K	500 mA 18 W 2448 lm	361EB 3 3
	4000 K	500 mA 18 W 2563 lm	361EB 3 5
	D.WHITE	-	361EB 3 7

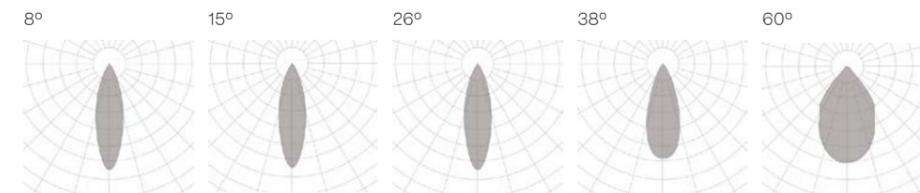

The data shown corresponds to raw values.
If the symbols use identical lettering, the desired color must be specified at a later stage.

SASSY ROUND + MODEL 1


- | | | | | |
|--|--|---|---|---|
| <ul style="list-style-type: none"> BLACK BASE COLOR + FINISH RING B · Black + Black G · Black + White J · Black + Chrome J · Black + Grafite J · Black + Mat Silver | <ul style="list-style-type: none"> WHITE BASE COLOR + FINISH RING H · White + Black W · White + White I · White + Chrome I · White + Grafite I · White + Mat Silver | <ul style="list-style-type: none"> INSTALLATION 5 · Recessed with frame 6 · Trimless | <ul style="list-style-type: none"> DIMM OPTIONS O · On-Off D · Dali P · Push V · 1.10v F · Phase cut | <ul style="list-style-type: none"> BEAM ANGLE 1 · 8° 2 · 15° 4 · 26° 5 · 38° 7 · 60° |
|--|--|---|---|---|

ROY FAMILY



- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
-
- DIM OPTIONAL
- INDOOR
- 220-240 V 50-60 HZ
- CE

Ø95

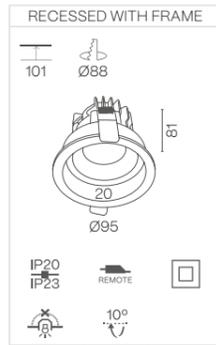


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

POWER STANDARD

		Ø95	
	300 mA	10 W 1496 - 1521 - 1592 lm	
18°	2700 K	359EB5 132	
	3000 K	359EB5 133	
	4000 K	359EB5 135	
25°	2700 K	359EB5 142	
	3000 K	359EB5 143	
	4000 K	359EB5 145	
38°	2700 K	359EB5 152	
	3000 K	359EB5 153	
	4000 K	359EB5 155	
60°	2700 K	359EB5 172	
	3000 K	359EB5 173	
	4000 K	359EB5 175	

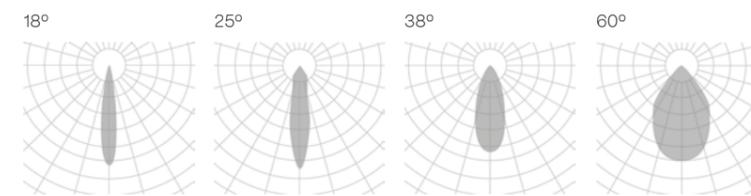

The data shown corresponds to raw values.

- Down light
- FINISH**
B · Black
W · White
S · Special color
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push


CAN REVIEW FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 HZ
- CE

CAN REVIEW


Ø110

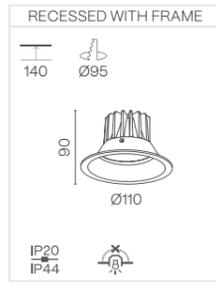

Ø160

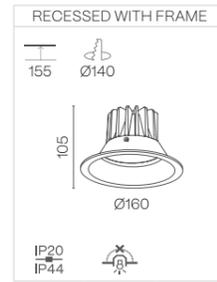


Ø190

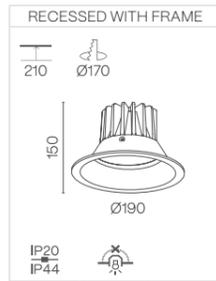

Ø230



Ø280

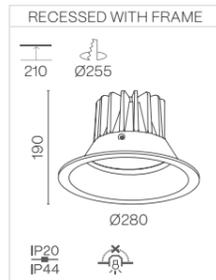


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

CAN REVIEW

POWER STANDARD

		Ø110	Ø160	Ø190	Ø230	Ø280
		500 mA 8,5 W 1063 - 1094 - 1134 lm	500 mA 17,4 W 2081 - 2176 - 2305 lm	750 mA 26 W 3202 - 3325 - 3491 lm	1000 mA 35 W 4199 - 4390 - 4644 lm	1200 mA 46 W 4979 - 5170 - 5424 lm
40°	2700 K	308EB5 152 ✖	308EE5 152 ✖	308EH5 152 ✖	308EJ5 152 ✖	308EL5 152 ✖
	3000 K	308EB5 153 ✖	308EE5 153 ✖	308EH5 153 ✖	308EJ5 153 ✖	308EL5 153 ✖
	4000 K	308EB5 155 ✖	308EE5 155 ✖	308EH5 155 ✖	308EJ5 155 ✖	308EL5 155 ✖
60°	2700 K	308EB5 172 ✖	308EE5 172 ✖	308EH5 172 ✖	308EJ5 172 ✖	308EL5 172 ✖
	3000 K	308EB5 173 ✖	308EE5 173 ✖	308EH5 173 ✖	308EJ5 173 ✖	308EL5 173 ✖
	4000 K	308EB5 175 ✖	308EE5 175 ✖	308EH5 175 ✖	308EJ5 175 ✖	308EL5 175 ✖

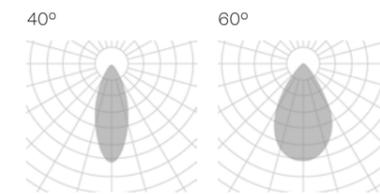


The data shown corresponds to raw values.


- INSTALLATION**
 - FINISH**
 - DIMM OPTIONS**
 - Down light
- 1 · Pendant
 - B · Black
 - O · On-Off
 - 2 · Pendant up light
 - W · White
 - D · Dali
 - 3 · Surface
 - S · Special color
 - P · Push
 - 4 · Recessed with frame
 - 5 · Trimless

CAN REVIEW IP65

Ø90

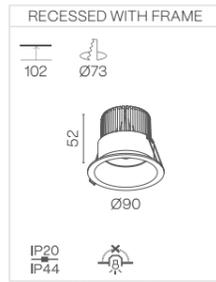

Ø109

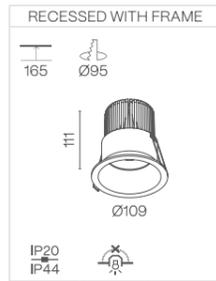


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

CAN REVIEW IP65

POWER STANDARD

		Ø90	Ø109
		500 mA 10 W 723 - 756 - 828 lm	500 mA 15 W 1084 - 1135 - 1244 lm
90°	2700 K	365EB5 142	365EE5 142
	3000 K	365EB5 143	365EE5 143
	4000 K	365EB5 145	365EE5 145
40°	2700 K	365EB5 152	365EE5 152
	3000 K	365EB5 153	365EE5 153
	4000 K	365EB5 155	365EE5 155
60°	2700 K	365EB5 172	365EE5 172
	3000 K	365EB5 173	365EE5 173
	4000 K	365EB5 175	365EE5 175

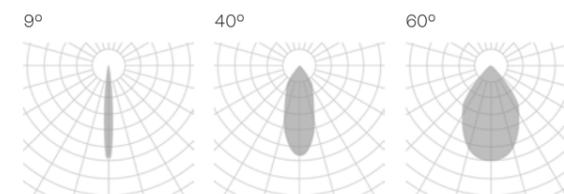

The data shown corresponds to raw values.

- INSTALLATION**
 - FINISH**
 - DIMM OPTIONS**
 - Down light
- 1 · Pendant
 - B · Black
 - O · On-Off
 - 2 · Pendant up light
 - W · White
 - D · Dali
 - 3 · Surface
 - S · Special color
 - P · Push
 - 4 · Recessed with frame
 - 5 · Trimless


ALDAIA FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK06
- IP20
IP44
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V
50-60 HZ
- CE

ALDAIA


Ø103



Ø145




Ø200



POWER STANDARD

		Ø103	Ø145	Ø200
Opal		300 mA 11 W 1440 - 1560 - 1680 lm	500 mA 15 W 2000 - 2167 - 2333 lm	800 mA 34 W 4480 - 4853 - 5227 lm
	2700 K	300EB5 ■ 112 ✘	300EE5 ■ 112 ✘	300EH5 ■ 112 ✘
	3000 K	300EB5 ■ 113 ✘	300EE5 ■ 113 ✘	300EH5 ■ 113 ✘
	4000 K	300EB5 ■ 115 ✘	300EE5 ■ 115 ✘	300EH5 ■ 115 ✘

Opal



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light


- ON DEMAND OPTIONS**
- Wireless control options

- FINISH**
- B** · Black
- W** · White
- S** · Special color


- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

ALDAIA SQ


102x102



142x142




200x200



POWER STANDARD

		102 x 102	142 x 142	200 x 200
Opal		300 mA 11 W 1440 - 1560 - 1680 lm	500 mA 15 W 2000 - 2167 - 2333 lm	800 mA 34 W 4480 - 4853 - 5227 lm
	2700 K	301EB5 ■ 112 ✘	301EE5 ■ 112 ✘	301EH5 ■ 112 ✘
	3000 K	301EB5 ■ 113 ✘	301EE5 ■ 113 ✘	301EH5 ■ 113 ✘
	4000 K	301EB5 ■ 115 ✘	301EE5 ■ 115 ✘	301EH5 ■ 115 ✘

Opal



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Wireless control options

- FINISH**
- B** · Black
- W** · White
- S** · Special color

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

VADI FAMILY



- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000H
-
- DIM
OPTIONAL
- INDOOR
- 220-240 V
50-60 Hz
- CE

VADI

Ø82



Ø124




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options

VADI

POWER STANDARD

		Ø82	Ø124
		300 mA 10 W 1496 - 1521 - 1592 lm	500 mA 6 W 2798 - 2846 - 2970 lm
40°	2700 K	366EB5W152	366EE5W152
	3000 K	366EB5W153	366EE5W153
	4000 K	366EB5W155	366EE5W155
60°	2700 K	366EB5W172	366EE5W172
	3000 K	366EB5W173	366EE5W173
	4000 K	366EB5W175	366EE5W175

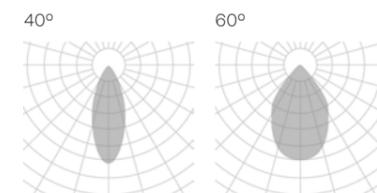


The data shown corresponds to raw values.
This product is only available in a white finish.

- DIMM OPTIONS**
- On-Off
 - Dali
 - Push

- Down light

KONI FAMILY

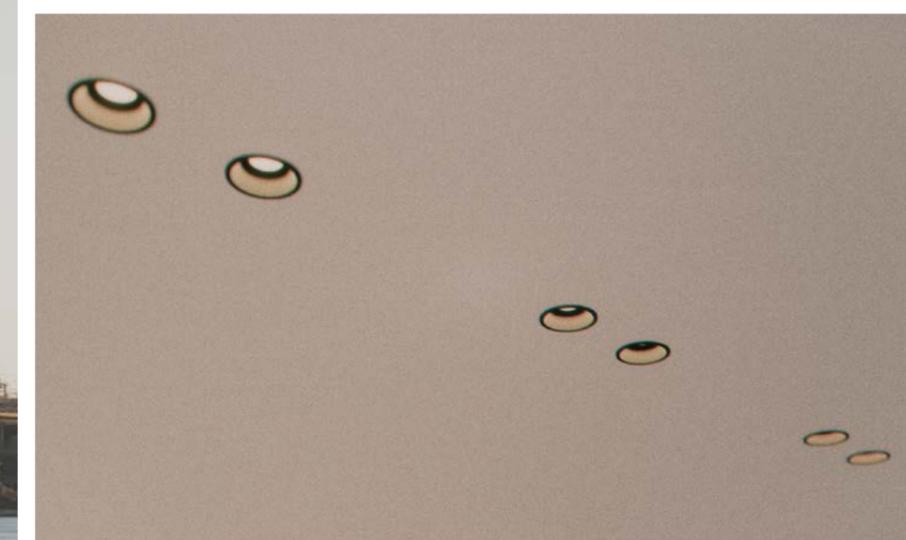

- ALUMINIUM PC
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 HZ
- CE

KONI


Ø80



Ø98



Ø180

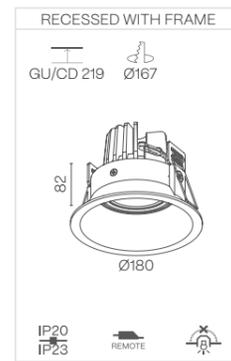

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

KONI

POWER STANDARD

		Ø80	Ø98
		250 mA 8 W 1358 - 1380 - 1445 lm	250 mA 8 W 1358 - 1380 - 1445 lm
40°	2700 K	388EB5 152	388EE5 152
	3000 K	388EB5 153	388EE5 153
	4000 K	388EB5 155	388EE5 155
60°	2700 K	388EB5 172	388EE5 172
	3000 K	388EB5 173	388EE5 173
	4000 K	388EB5 175	388EE5 175

POWER GU5.3

		Ø80	Ø98
		Max. 8 W LED	Max. 8 W LED
-		388EB5 400X	388EE5 400X

POWER G53


		Ø180
		Max. 20 W LED
-		388EH5 400X

POWER GU10

		Ø80	Ø98	Ø180
		Max. 8 W LED	Max. 8 W LED	Max. 8 W LED
.GU		388EB5 500X	388EE5 500X	388EH5 500X

POWER CDMR

		Ø180
		Max. 20 W LED
.CD		388EH5 700X

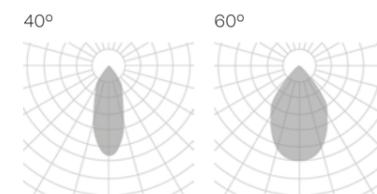

The data shown corresponds to raw values.

Down light

- FINISH**
- B** · Black
 - W** · White
 - A** · Striped aluminum
 - S** · Special color
- DIMM OPTIONS**
- D** · Dali
 - P** · Push
 - V** · 1.10v

KONI DEEP

Ø83




POWER STANDARD

		Ø83	
		250 mA 8 W 1358 - 1380 - 1445 lm	
40°	2700 K	389EB5 152	
	3000 K	389EB5 153	
	4000 K	389EB5 155	
60°	2700 K	389EB5 172	
	3000 K	389EB5 173	
	4000 K	389EB5 175	

POWER GU10

		Ø83	
		Max. 8 W LED	
	.GU	389EB5 500X	

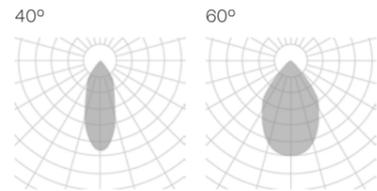

The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

- FINISH**
- B** · Black
- W** · White
- S** · Special color
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

KONI TURTA



Ø81

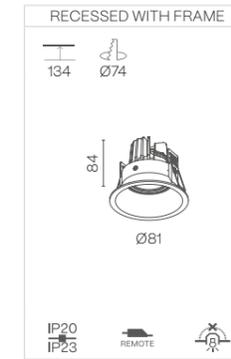

POWER STANDARD

		Ø83	Ø100
		250 mA 7 W 855 - 900 - 957 lm	250 mA 7 W 855 - 900 - 957 lm
40°	2700 K	390EB5 152	390EE5 152
	3000 K	390EB5 153	390EE5 153
	4000 K	390EB5 155	390EE5 155
60°	2700 K	390EB5 172	390EE5 172
	3000 K	390EB5 173	390EE5 173
	4000 K	390EB5 175	390EE5 175

Ø100

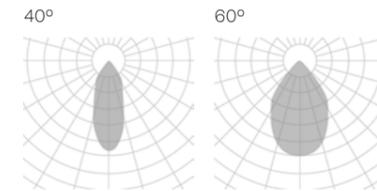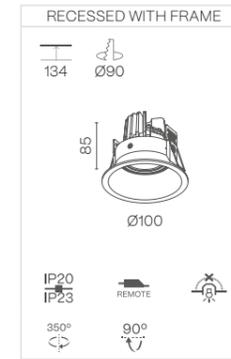

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Wireless control options

- FINISH**
- B** · Black
- W** · White
- S** · Special color
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

CATLI FAMILY



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL




220-240 V
50-60 Hz




CATLI

Ø80 / Ø93

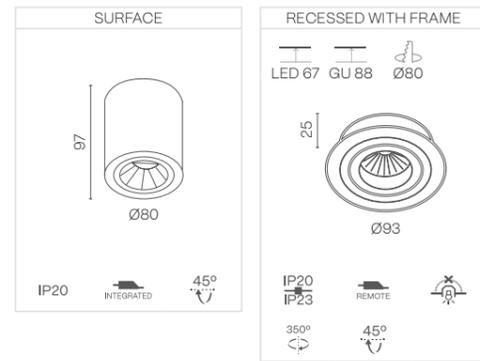

Ø170

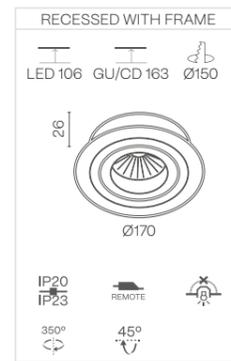

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

CATLI

POWER STANDARD

		Ø80 / Ø93	Ø170
		250 mA 8 W 1358 - 1380 - 1445 lm	350 mA 18 W 2720 - 2767 - 2887 lm
40°	2700 K	381EB 152	381EE5 152
	3000 K	381EB 153	381EE5 153
	4000 K	381EB 155	381EE5 155
60°	2700 K	381EB 172	381EE5 172
	3000 K	381EB 173	381EE5 173
	4000 K	381EB 175	381EE5 175

POWER HIGH

		Ø80 / Ø93
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	381EB 352
	3000 K	381EB 353
	4000 K	381EB 355
60°	2700 K	381EB 372
	3000 K	381EB 373
	4000 K	381EB 375

POWER GU10

		Ø80 / Ø93	Ø170
		Max. 8 W LED	Max. 20 W LED
.GU		381EB 500X	381EE5 500X

POWER GU5.3


		Ø80 / Ø93
		Max. 8 W LED
-		381EB 400X

POWER G53

		Ø170
		Max. 20 W LED
-		381EE5 400X

POWER CDMR

		Ø170
		Max. 20 W LED
.CD		381EE5 700X

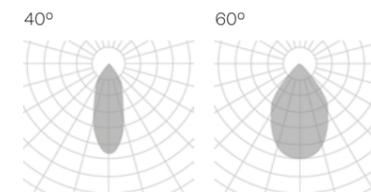


The data shown corresponds to raw values.


- INSTALLATION**
- 3 · Surface
- 5 · Recessed with frame
- FINISH**
- B · Black
- W · White
- A · Striped aluminum
- DIMM OPTIONS**
- D · Dali
- P · Push
- V · 1.10v
- Down light

CATLI SQ

80 x 80 / 94 x 94

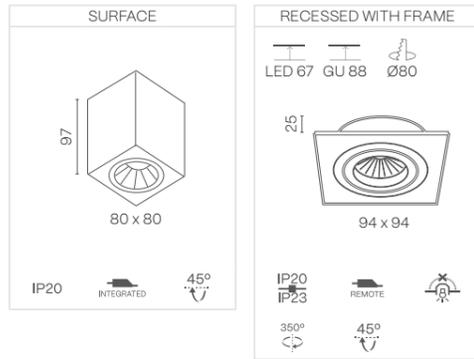

170 x 170

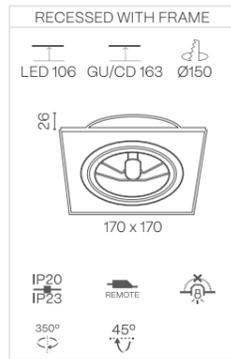

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

CATLI SQ

POWER STANDARD

		80 x 80 / 94 x 94	170 x 170
		250 mA 8 W 1358 - 1380 - 1445 lm	350 mA 18 W 2720 - 2767 - 2887 lm
40°	2700 K	385EB 152	385EE5 152
	3000 K	385EB 153	385EE5 153
	4000 K	385EB 155	385EE5 155
60°	2700 K	385EB 172	385EE5 172
	3000 K	385EB 173	385EE5 173
	4000 K	385EB 175	385EE5 175

POWER HIGH

		94 x 94
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	385EB5 352
	3000 K	385EB5 353
	4000 K	385EB5 355
60°	2700 K	385EB5 372
	3000 K	385EB5 373
	4000 K	385EB5 375

POWER GU10

		80 x 80 / 94 x 94	170 x 170
		Max. 8 W LED	Max. 20 W LED
.GU		385EB 500X	385EE5 500X

POWER GU5.3


		80 x 80 / 94 x 94
		Max. 8 W LED
-		385EB 400X

POWER G53

		170 x 170
		Max. 20 W LED
-		385EE5 400X

POWER CDMR

		170 x 170
		Max. 20 W LED
.CD		385EE5 700X

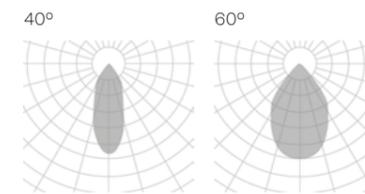

The data shown corresponds to raw values.

INSTALLATION

- Pendant
- Pendant up light
- Surface
- Recessed with frame
- Trimless

FINISH

- B** · Black
- W** · White
- A** · Striped aluminum


DIMM OPTIONS

- D** · Dali
- P** · Push
- V** · 1.10v


Down light

CATLI SQ DOUBLE

186 x 94

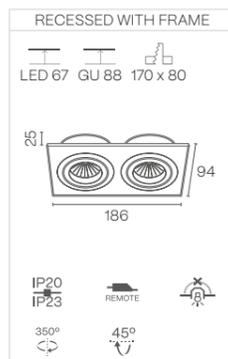

340 x 170

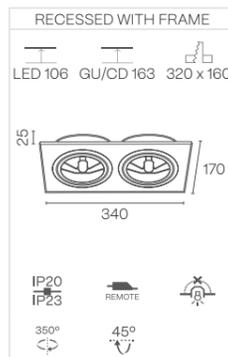

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

CATLI SQ DOUBLE

POWER STANDARD


		186 x 94	340 x 170
		250 mA 8 W 1358 - 1380 - 1445 lm	350 mA 18 W 2720 - 2767 - 2887 lm
40°	2700 K	386EB5 152	386EE5 152
	3000 K	386EB5 153	386EE5 153
	4000 K	386EB5 155	386EE5 155
60°	2700 K	386EB5 172	386EE5 172
	3000 K	386EB5 173	386EE5 173
	4000 K	386EB5 175	386EE5 175

POWER GU10

		186 x 94	340 x 170
		Max. 2 x 8 W LED	Max. 2 x 20 W LED
.GU		386EB5 500X	386EE5 500X

POWER G53

		340 x 170
		Max. 2 x 20 W LED
-		386EE5 400X

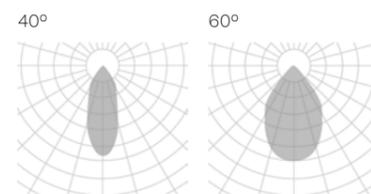

The data shown corresponds to raw values.

Down light

- FINISH**
- B** · Black
 - W** · White
 - A** · Striped aluminum
- DIMM OPTIONS**
- D** · Dali
 - P** · Push
 - V** · 1.10v

POWER HIGH

		186 x 94
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	386EB5 352
	3000 K	386EB5 353
	4000 K	386EB5 355
60°	2700 K	386EB5 372
	3000 K	386EB5 373
	4000 K	386EB5 375

POWER GU5.3


		186 x 94
		Max. 2 x 8 W LED
-		386EB5 400X

POWER CDMR

		340 x 170
		Max. 2 x 20 W LED
.CD		386EE5 700X

CATLI CLASSIC

Ø85

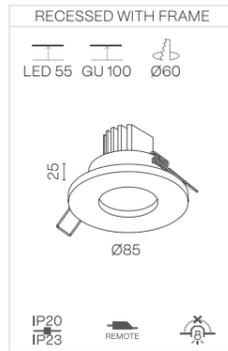

POWER STANDARD

		Ø85	
		 BPM50	
		250 mA 8 W 1358 - 1380 - 1445 lm	
40°	2700 K	382EB5 152 ✖	
	3000 K	382EB5 153 ✖	
	4000 K	382EB5 155 ✖	
60°	2700 K	382EB5 172 ✖	
	3000 K	382EB5 173 ✖	
	4000 K	382EB5 175 ✖	

POWER HIGH


		Ø85	
		 BPM300	
		350 mA 12 W 1784 - 1820 - 1866 lm	
40°	2700 K	382EB5 352 ✖	
	3000 K	382EB5 353 ✖	
	4000 K	382EB5 355 ✖	
60°	2700 K	382EB5 372 ✖	
	3000 K	382EB5 373 ✖	
	4000 K	382EB5 375 ✖	

POWER GU10

		Ø85	
		 GU10	
		Max. 2 x 8 W LED	
	.GU	382EB5 500X	

POWER GU5.3

		Ø85	
		 GU5.3	
		Max. 2 x 8 W LED	
	-	382EB5 400X	

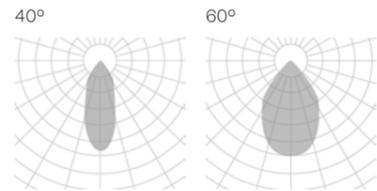

The data shown corresponds to raw values.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
-  Down light

- ON DEMAND OPTIONS**
-  Wireless control options
-  Wall washer lens 15° beam angle

- FINISH**
- B** · Black
- W** · White
- A** · Striped aluminum
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

CATLI CLASSIC SQ

85 x 85



POWER STANDARD

		85 x 85	
		 BPM50	
		250 mA 8 W 1358 - 1380 - 1445 lm	
40°	2700 K	383EB5 152 ✖	
	3000 K	383EB5 153 ✖	
	4000 K	383EB5 155 ✖	
60°	2700 K	383EB5 172 ✖	
	3000 K	383EB5 173 ✖	
	4000 K	383EB5 175 ✖	

POWER HIGH


		85 x 85	
		 BPM300	
		350 mA 12 W 1784 - 1820 - 1866 lm	
40°	2700 K	383EB5 352 ✖	
	3000 K	383EB5 353 ✖	
	4000 K	383EB5 355 ✖	
60°	2700 K	383EB5 372 ✖	
	3000 K	383EB5 373 ✖	
	4000 K	383EB5 375 ✖	

POWER GU10

		85 x 85	
		 GU10	
		Max. 2 x 8 W LED	
	.GU	383EB5 500X	

POWER GU5.3

		85 x 85	
		 GU5.3	
		Max. 2 x 8 W LED	
	-	386EB5 400X	

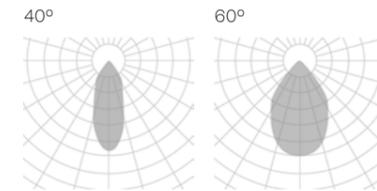

The data shown corresponds to raw values.


-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
-  Down light

- ON DEMAND OPTIONS**
-  Wireless control options
-  Wall washer lens 15° beam angle

- FINISH**
- B** · Black
- W** · White
- A** · Striped aluminum
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

CATLI HALKA

Ø83

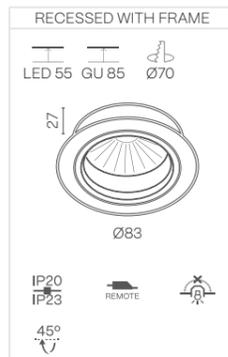

POWER STANDARD

		Ø83
		 BPM50
		250 mA 8 W 1358 - 1380 - 1445 lm
40°	2700 K	384EB5  152 
	3000 K	384EB5  153 
	4000 K	384EB5  155 
60°	2700 K	384EB5  172 
	3000 K	384EB5  173 
	4000 K	384EB5  175 

POWER HIGH


		Ø83
		 BPM300
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	384EB5  352 
	3000 K	384EB5  353 
	4000 K	384EB5  355 
60°	2700 K	384EB5  372 
	3000 K	384EB5  373 
	4000 K	384EB5  375 

POWER GU10

		Ø83
		 GU10
		Max. 8 W LED
.GU		384EB5  500X

POWER GU5.3

		Ø83
		 GU5.3
		Max. 8 W LED
-		384EB5  400X

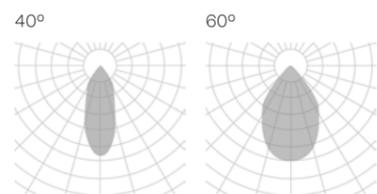


The data shown corresponds to raw values.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
-  Down light

-  **ON DEMAND OPTIONS**
-  Wireless control options
-  Wall washer lens 15° beam angle

-  **FINISH**
- B** · Black
- W** · White
- A** · Striped aluminum
-  **DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

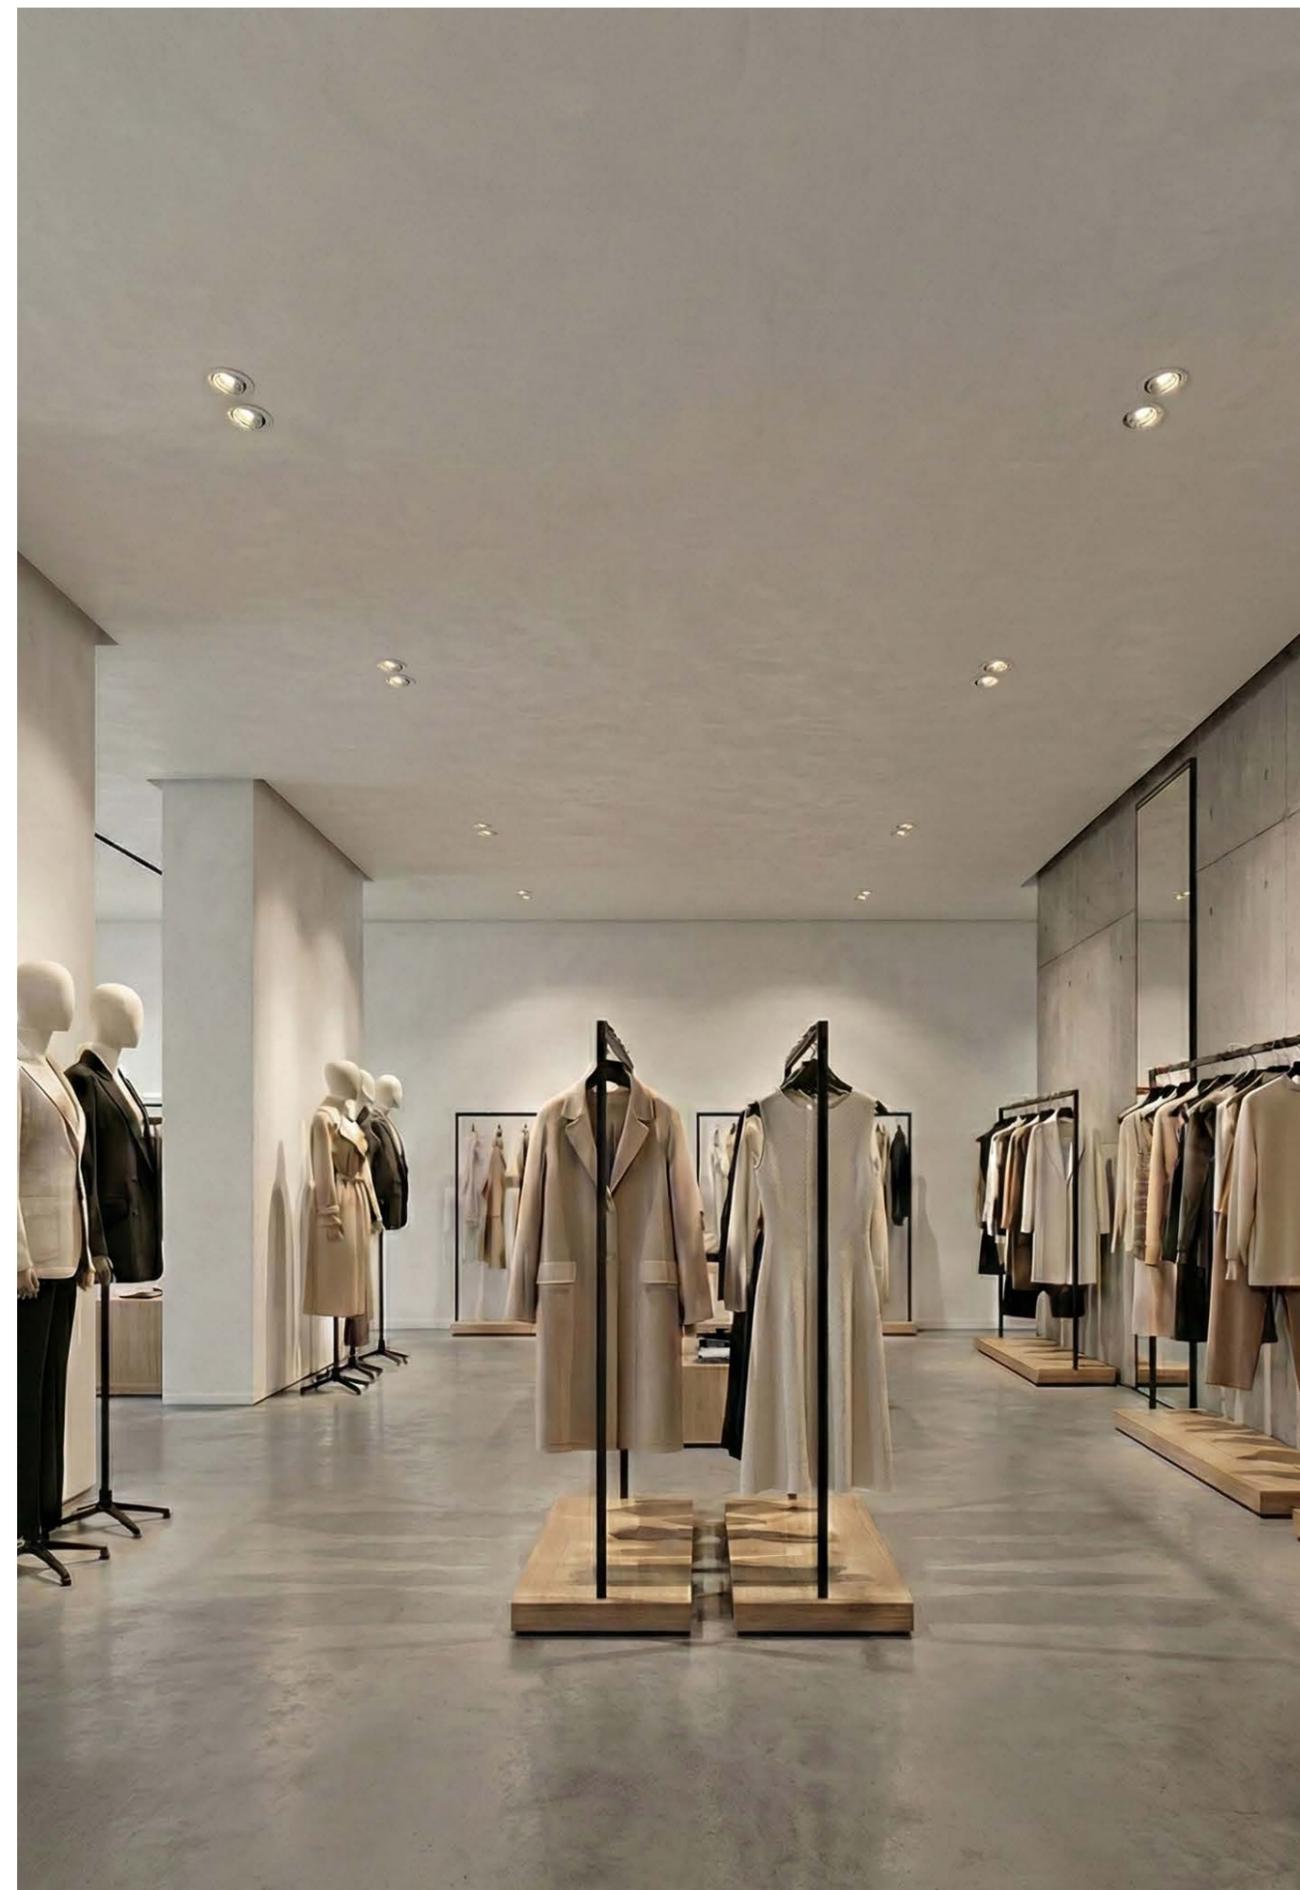



Iluminación para crear atmósfera

Diseñada para aportar carácter y atmósfera a los espacios arquitectónicos, la iluminación decorativa introduce una dimensión más expresiva de la luz. Una amplia variedad de formas, materiales y configuraciones ofrece una multitud de posibilidades para generar presencia visual sin perder equilibrio ni coherencia con el entorno.

Más allá de su valor estético, la iluminación decorativa contribuye al confort visual y a la identidad del espacio, complementando los esquemas de iluminación arquitectónica en proyectos hospitality, residenciales y contract.

Lighting for atmosphere

Designed to add character and atmosphere to architectural spaces, decorative lighting introduces a more expressive dimension to light. A wide range of forms, materials and configurations offers multiple possibilities to create visual presence while maintaining balance and coherence with the space.

Beyond its aesthetic role, decorative lighting contributes to visual comfort and spatial identity, complementing architectural lighting schemes in hospitality, residential and contract projects.

DECORATIVE




GALANTA
PAG. 376

SUBLIM
PAG. 382

VENISE
PAG. 386

FACE
PAG. 340

DECORATIVE

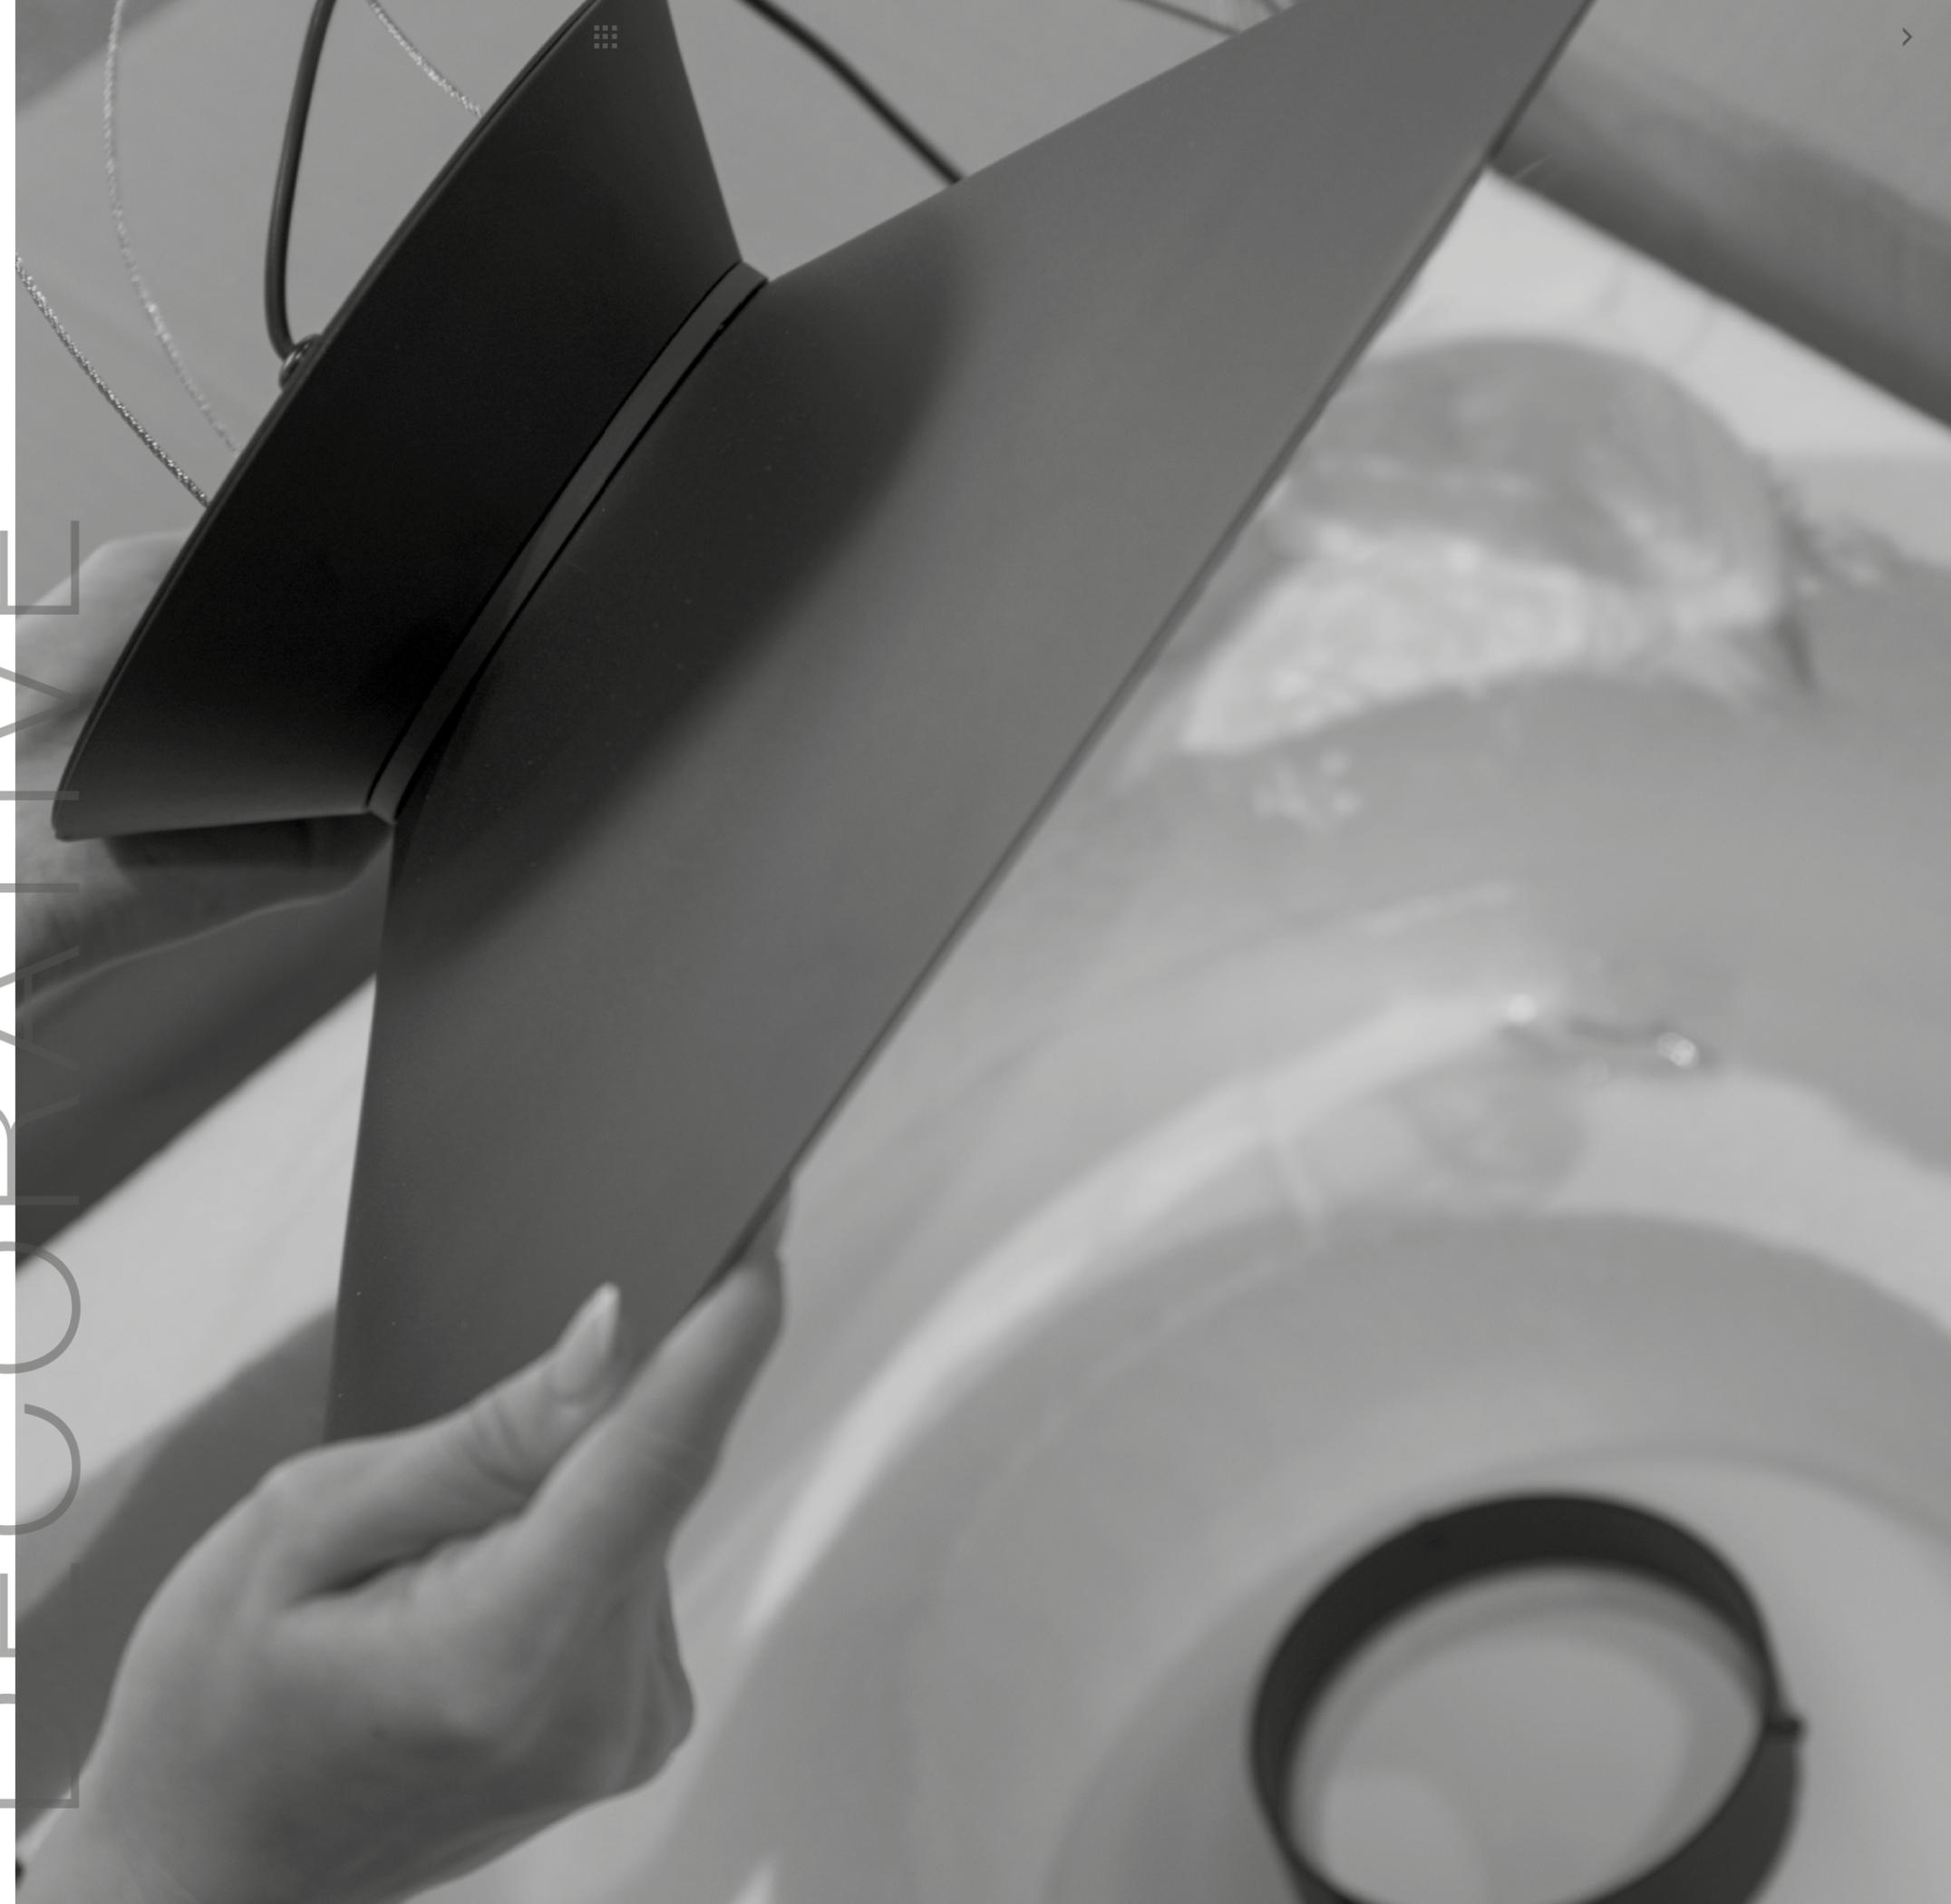


GALANTA FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK06
- IP20
IP44
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V
50-60 Hz
- CE

GALANTA DEEP


Ø70

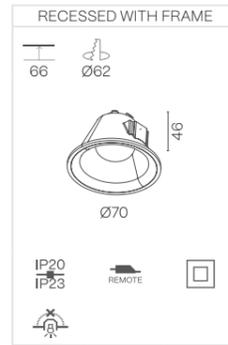

Ø83

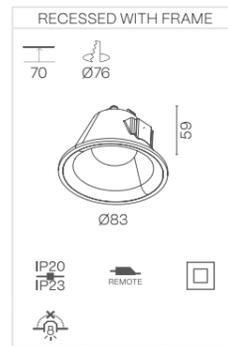

Ø94

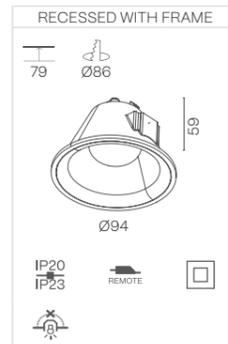

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Wireless control options

GALANTA DEEP

POWER STANDARD – Recessed with frame installation

		Ø70	Ø83	Ø94
Opal	500 mA	4 W 324 - 408 - 492 lm	7 W 432 - 545 - 656 lm	10 W 802 - 906 - 960 lm
	2700 K	506EB5 112	506EE5 112	506EH5 112
	3000 K	506EB5 113	506EE5 113	506EH5 113
	4000 K	506EB5 115	506EE5 115	506EH5 115

Opal




The data shown corresponds to raw values.

- FINISH**
- DIMM OPTIONS**
- Down light
- B · Black
- O · On-Off
- W · White
- D · Dali
- S · Special color
- P · Push

GALANTA BONETE

Ø80

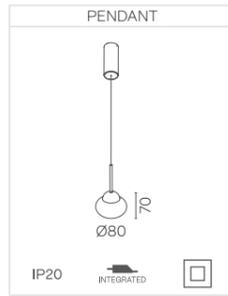

ON DEMAND OPTIONS

Wireless control options

GALANTA BONETE

POWER STANDARD – Pendant installation

		Ø80	
	500 mA	5 W 698 – 790 – 850 lm	
Opal	2700 K	505EB1 112	
	3000 K	505EB1 113	
	4000 K	505EB1 115	

Opal



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On-Off
D · Dali
P · Push

Down light


SUBLIM FAMILY




- ALUMINIUM PC
- CRI ≥90
- IK06
- IP20
IP44
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V
50-60 Hz
- CE

SUBLIM


H270

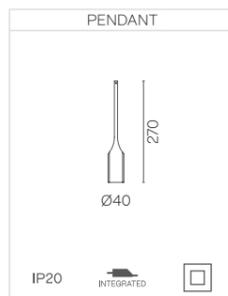

H400

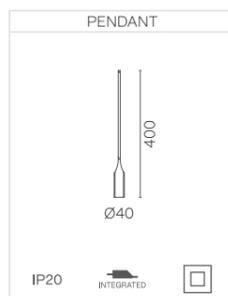

H1000

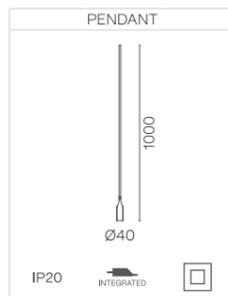


ON DEMAND OPTIONS

Wireless control options

SUBLIM

POWER STANDARD – Pendant installation

		H270	H400	H1000
36°	350 mA	9 W 1073 - 1122 - 1186 lm	9 W 1073 - 1122 - 1186 lm	9 W 1073 - 1122 - 1186 lm
	2700 K	507EB1 152	507EE1 152	507EH1 152
	3000 K	507EB1 153	507EE1 153	507EH1 153
	4000 K	507EB1 155	507EE1 155	507EH1 155



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On-Off
D · Dali
P · Push

Down light


VENISE FAMILY



- ALUMINIUM PC
- CRI ≥90
- IK06
- IP20
IP44
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V
50-60 Hz
- CE

VENISE

Ø200

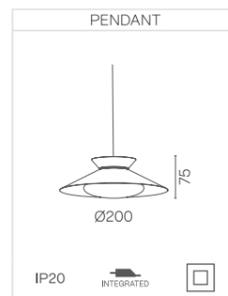

Ø320



Ø450



Ø600



ON DEMAND OPTIONS

 Wireless control options

VENISE

POWER STANDARD – Pendant installation

		Ø200	Ø320	Ø450	Ø600
		500 mA 9 W 1100 lm	500 mA 18 W 1302 lm	700 mA 28 W 2310 lm	1050 mA 43 W 3520 lm
Opal	3000 K	508EB1  113 	508EE1  113 	508EH1  113 	508EJ1  113 

Opal



The data shown corresponds to raw values.

FINISH


- B** · Black
- W** · White
- G** · Black – white
- H** · White – black
- I** · White – special color
- J** · Black – special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push

 Down light


FACE FAMILY

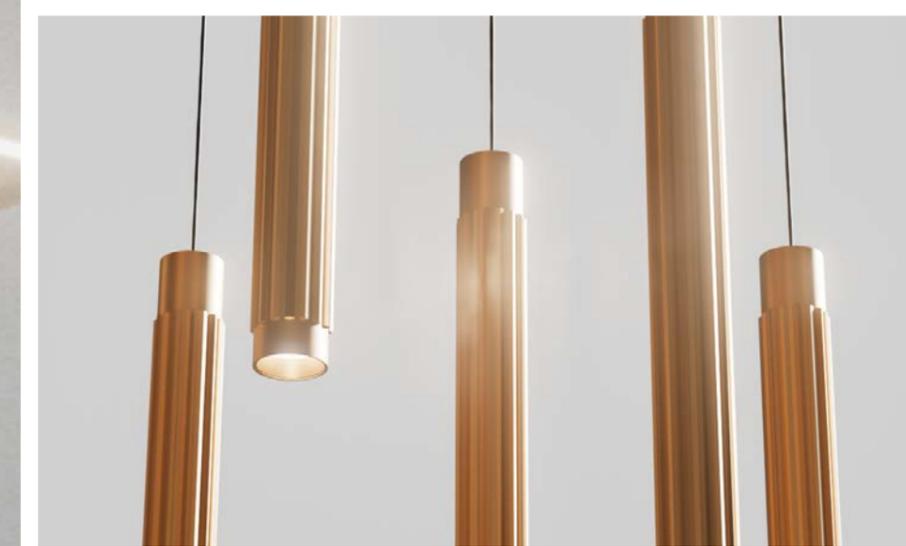



- ALUMINIUM PC
- CRI ≥90
- IK06
- IP20
IP44
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V
50-60 Hz
- CE

FACE TUBULAR


Ø40 - H300

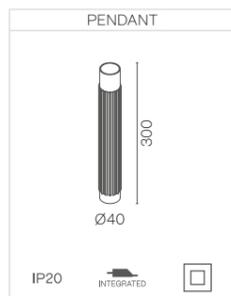

Ø40 - H122

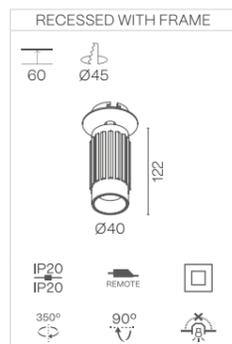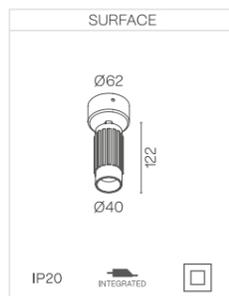


Ø40 - H400

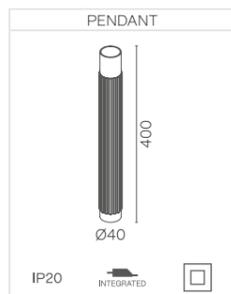

FACE TUBULAR

POWER STANDARD

		Ø40 - H122	Ø40 - H300	Ø40 - H400
40°	350 mA	10 W 792 - 848 - 876 lm	10 W 792 - 848 - 876 lm	10 W 792 - 848 - 876 lm
	2700 K	503EB 152	503EB1 152	503EE1 152
	3000 K	503EB 143	503EB1 153	503EE1 153
	4000 K	503EB 145	503EB1 155	503EE1 155




The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Wireless control options


- INSTALLATION**
- 3 · Surface
- 5 · Recessed with frame
- FINISH**
- B · Black
- W · White
- S · Special color
- DIMM OPTIONS**
- O · On-Off
- D · Dali
- P · Push
- Down light

FACE TUBULAR SPAC

Ø60 - H300

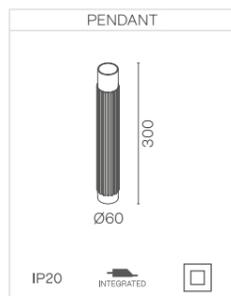

Ø60 - H400

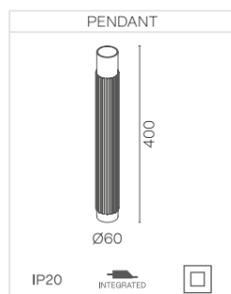


ON DEMAND OPTIONS

Wireless control options

FACE TUBULAR SPAC

POWER STANDARD - Pendant installation

		Ø60 - H300	Ø60 - H400
40°	700 mA	15 W 1324 - 1358 - 1385 lm	15 W 1324 - 1358 - 1385 lm
	2700 K	504EB1 152	504EE1 152
	3000 K	504EB1 153	504EE1 153
	4000 K	504EB1 155	504EE1 155



The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- S · Special color


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


Down light

FACE IRIS


Ø105

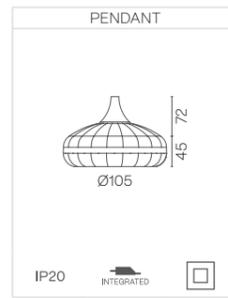

Ø170

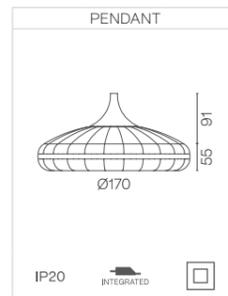

Ø270

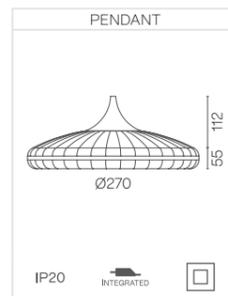


ON DEMAND OPTIONS

Wireless control options

FACE IRIS

POWER STANDARD – Pendant installation

		Ø105	Ø170	Ø270
		500 mA 10 W 1021 – 1065 – 1202 lm	500 mA 19 W 1880 – 2264 – 2322 lm	700 mA 28 W 2296 – 2830 – 2966 lm
60°	2700 K	500EB1 172	500EE1 172	500EH1 172
	3000 K	500EB1 173	500EE1 173	500EH1 173
	4000 K	500EB1 175	500EE1 175	500EH1 175



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color


DIMM OPTIONS

O · On-Off
D · Dali
P · Push


Down light

FACE KIERA


Ø56

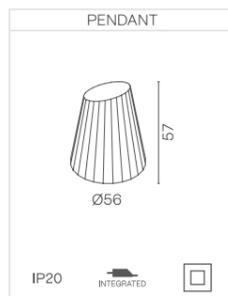

Ø75

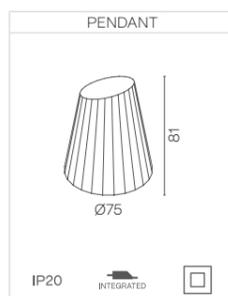

Ø100

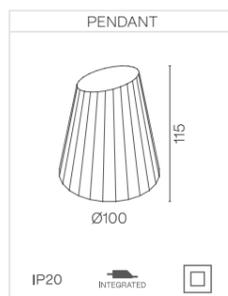


ON DEMAND OPTIONS

Wireless control options

FACE KIERA

POWER STANDARD – Pendant installation

		Ø56	Ø75	Ø100
38°		500 mA 5 W 514 - 559 - 610 lm	700 mA 7 W 715 - 730 - 743 lm	500 mA 17 W 1396 - 1655 - 1962 lm
	2700 K	501EB1 152	501EE1 152	501EH1 152
	3000 K	501EB1 153	501EE1 153	501EH1 153
	4000 K	501EB1 155	501EE1 155	501EH1 155




The data shown corresponds to raw values.


- FINISH**
- B · Black
- W · White
- S · Special color
- DIMM OPTIONS**
- O · On-Off
- D · Dali
- P · Push
- Down light

FACE KIERA CEMENT


Ø56

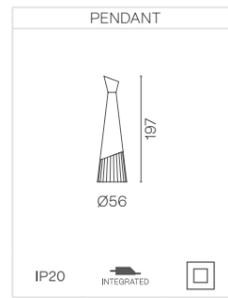

Ø75

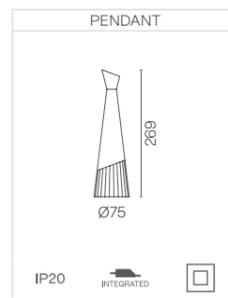

Ø100

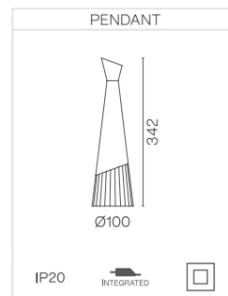


ON DEMAND OPTIONS

Wireless control options

FACE KIERA CEMENT

POWER STANDARD – Pendant installation

		Ø56	Ø75	Ø100
		500 mA 5 W 514 – 559 – 610 lm	700 mA 7 W 715 – 730 – 743 lm	500 mA 17 W 1396 – 1655 – 1962 lm
38°	2700 K	502EB1 152	502EE1 152	502EH1 152
	3000 K	502EB1 153	502EE1 153	502EH1 153
	4000 K	502EB1 155	502EE1 155	502EH1 155



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On-Off
D · Dali
P · Push

Down light

La presencia invisible

Diseñada para integrarse de forma natural en los planos verticales, la iluminación de pared ofrece una luz sutil y controlada que realza el espacio sin reclamar protagonismo. La luz actúa como un elemento arquitectónico silencioso, definiendo profundidad, ritmo y atmósfera.

A través de emisiones indirectas y una distribución cuidada de la luz, la iluminación de pared contribuye al confort visual y al equilibrio espacial, permitiendo que la arquitectura siga siendo la verdadera protagonista.

The invisible presence

Designed to integrate seamlessly into vertical surfaces, wall lighting provides subtle and controlled illumination that enhances space without drawing attention to itself. Light becomes a quiet architectural element, defining depth, rhythm and atmosphere.

By working with indirect emission and careful light distribution, wall lighting contributes to visual comfort and spatial balance, allowing the architecture to remain the true protagonist.

WALLLIGHTS

< **FLAT**
PAG. 406

HURY
PAG. 408

IKI
PAG. 410

KAPI
PAG. 412

KUU
PAG. 414

MAGRIT
PAG. 418

ADIMA
PAG. 418

KLEE
PAG. 419


WALL LIGHTS



FLAT


NEW

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

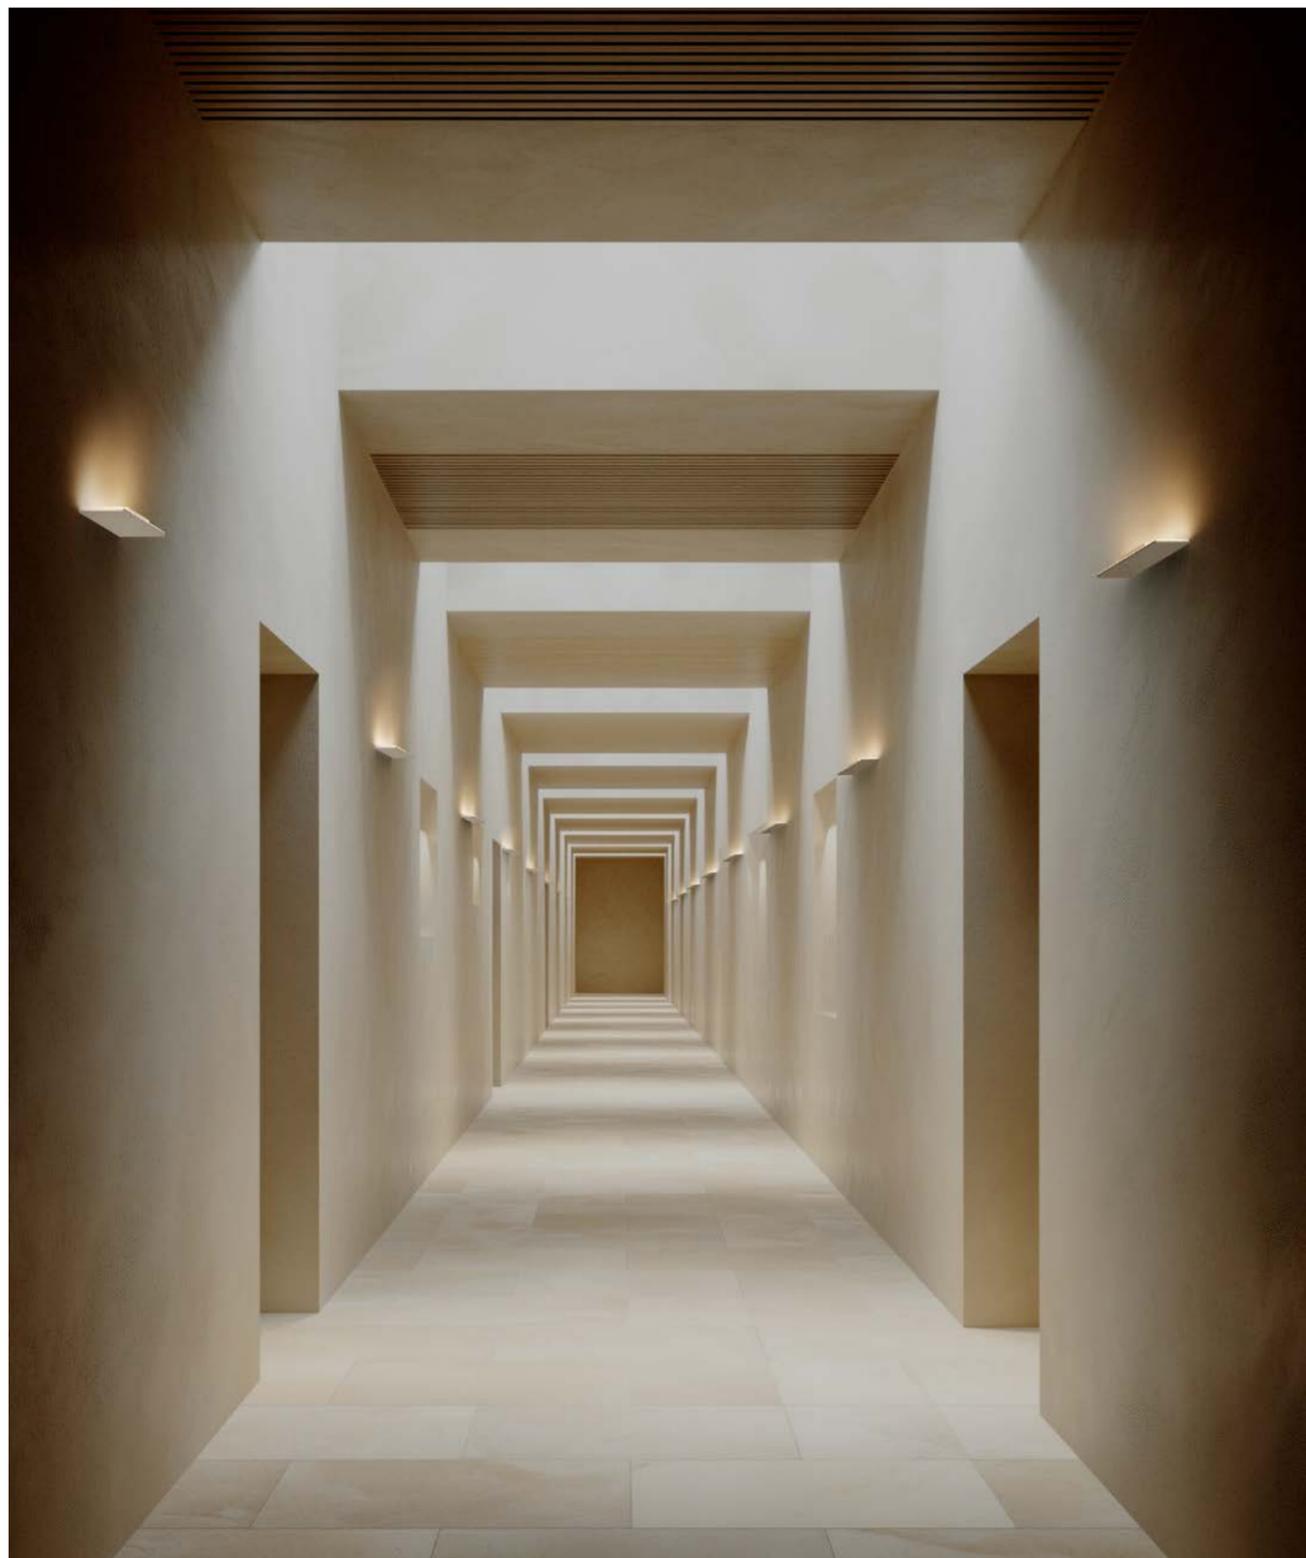


FLAT / FLAT SLIM

L200

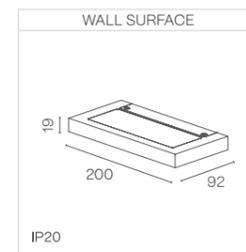


L300

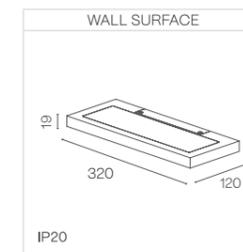

POWER STANDARD

		L200	L300
		16 W 1270 - 1380 - 1434 lm	30 W 2379 - 2586 - 2691 lm
Opal	2700 K	520EB7 112 ✖	521EE7 112 ✖
	3000 K	520EB7 113 ✖	521EE7 113 ✖
	4000 K	520EB7 115 ✖	521EE7 115 ✖

L250

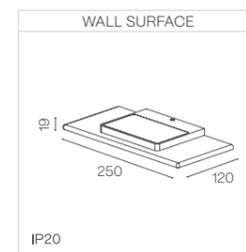

POWER STANDARD

		L250	
		20 W 1790 - 1950 - 2020 lm	
Opal	2700 K	521EB7 112 ✖	
	3000 K	521EB7 113 ✖	
	4000 K	521EB7 115 ✖	

The data shown corresponds to raw values.

LENGTHS mm

200 · 250 · 300

Up light

Phase cut on demand

FINISH

B · Black
W · White

DIMM OPTIONS

O · On-Off
D · Dali
P · Push
V · 1.10v

HURY

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



HURY

L320



L520



L720



POWER STANDARD

		L320	L520	L720
	24 VdC	12 W 1451 lm	19 W 2358 lm	26 W 3265 lm
Opal	3000 K	522EB7 ■ 113 ✖	522EE7 ■ 113 ✖	522EH7 ■ 113 ✖

The data shown corresponds to raw values.

LENGTHS mm

320 · 520 · 720

Up light

FINISH

B · Black
W · White


DIMM OPTIONS

O · On-Off
D · Dali
P · Push
V · 1.10v

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



L100

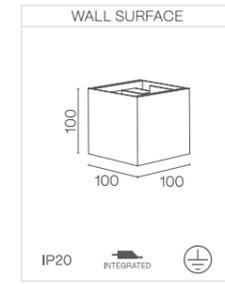

POWER STANDARD

		L100	
<input type="checkbox"/>	300 mA	5 W 533 lm	
Opal	3000 K	523EB7W1130	

The data shown corresponds to raw values.

LENGTHS mm

100


Up/down light

KAPI




KAPI


L150

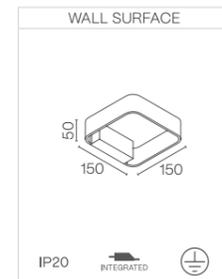

L300

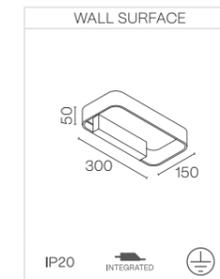

L500

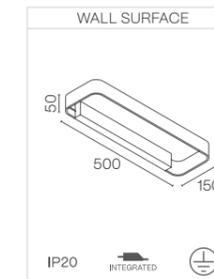

POWER STANDARD

		L150	L300	L500
	350 mA	2 W 250 lm	4 W 500 lm	10 W 1000 lm
Opal	3000 K	524EB7W1130	524EE7W1130	524EH7W1130

The data shown corresponds to raw values.

LENGTHS mm

150 · 300 · 500

Up/down light


KUU

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



KUU

L220

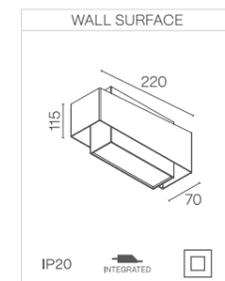

POWER STANDARD

		L220 - WHITE FINISH	L220 - BLACK FINISH
	100 mA	10 W 965 lm	10 W 965 lm
Opal	3000 K	525EB7W1130	524EE7B1130

The data shown corresponds to raw values.

LENGTHS mm

220

Up/down light

WALL RECESSED



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000h

DIM
OPTIONAL




220-240 V
50-60 Hz



WALL RECESSED


MAGRIT

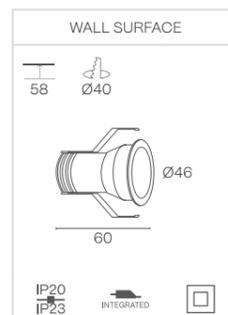

POWER STANDARD

		MAGRIT Ø46	
25°	700 mA	2 W	202 - 233 - 251 lm
	2700 K	535EB7	142O
	3000 K	535EB7	143O
	4000 K	535EB7	145O


ADIMA

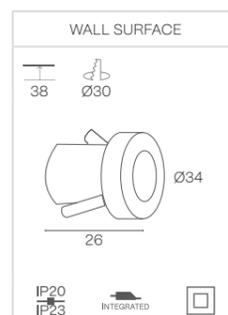

POWER STANDARD

		ADIMA Ø34	
25°	700 mA	2 W	202 - 233 - 251 lm
	2700 K	536EB7	142O
	3000 K	536EB7	143O
	4000 K	536EB7	145O


ADIMA SQ

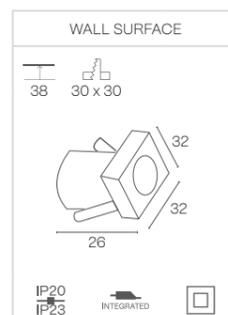

POWER STANDARD

		ADIMA SQ 32 x 32	
25°	700 mA	2 W	202 - 233 - 251 lm
	2700 K	537EB7	142O
	3000 K	537EB7	143O
	4000 K	537EB7	145O

25°




The data shown corresponds to raw values.

- Cut hole
- Cut hole
- Minimum height of the false ceiling
- Side light

- FINISH**
- B** · Black
- W** · White
- S** · Special color
- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push

WALL RECESSED


KLEE

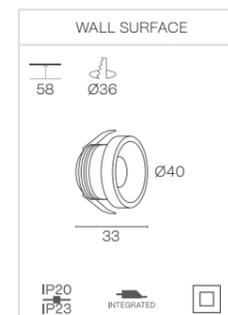

POWER STANDARD

		KLEE Ø40	
25°	700 mA	2 W	202 - 233 - 251 lm
	2700 K	538EB7	142O
	3000 K	538EB7	143O
	4000 K	538EB7	145O

KLEE SQ

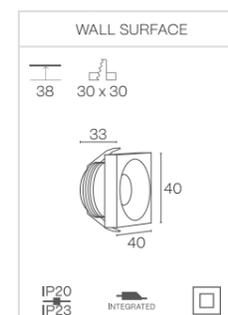

POWER STANDARD

		KLEE SQ 40 x 40	
25°	700 mA	2 W	202 - 233 - 251 lm
	2700 K	539EB7	142O
	3000 K	539EB7	143O
	4000 K	539EB7	145O

25°



The data shown corresponds to raw values.

- Cut hole
- Cut hole
- Minimum height of the false ceiling
- Side light

- FINISH**
- B** · Black
- W** · White
- S** · Special color
- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push

Confort a través de la luz y el sonido

Diseñada para mejorar el confort visual y acústico, la iluminación acústica integrada combina luz y absorción sonora como parte de un único sistema arquitectónico. Cada proyecto puede desarrollarse a medida, adaptando dimensiones, configuraciones y acabados a las necesidades espaciales y funcionales específicas.

Mediante paneles acústicos personalizados con iluminación integrada y discreta, se reduce la reverberación a la vez que se ofrece una iluminación controlada y de alta calidad. Un planteamiento flexible para interiores profesionales donde deben convivir confort, rendimiento y diseño.

Comfort through light and sound

Designed to enhance both visual and acoustic comfort, integrated acoustic lighting combines light and sound absorption as part of a single architectural system. Each project can be developed to measure, adapting dimensions, configurations and finishes to meet specific spatial and functional requirements.

Through customised acoustic panels with integrated and discreet lighting, reverberation is reduced while controlled, high-quality illumination is provided. A flexible approach for professional interiors where comfort, performance and design must coexist.

ACOUSTIC

ACOUSTIC ALBERTA

PAG. 428

ACOUSTIC ALABAMA

PAG. 430

ACOUSTIC ALABAMA SQ

PAG. 430

ACOUSTIC ALARIK SLIM

PAG. 432

ACOUSTIC ALBA MINI

PAG. 436

ACOUSTIC ALBA

PAG. 438

ACOUSTIC LAMBDA

PAG. 442

ACOUSTIC LINGGO MINI

PAG. 444

ACOUSTIC ALZIRA

PAG. 448

ACOUSTIC KLIMT FIX

PAG. 450

ACOUSTIC KLIMT FIX SQ

PAG. 450


ACOUSTIC ACCESORIES

PAG. 454

ACOUSTIC



COMFORT THROUGH LIGHT AND SOUND

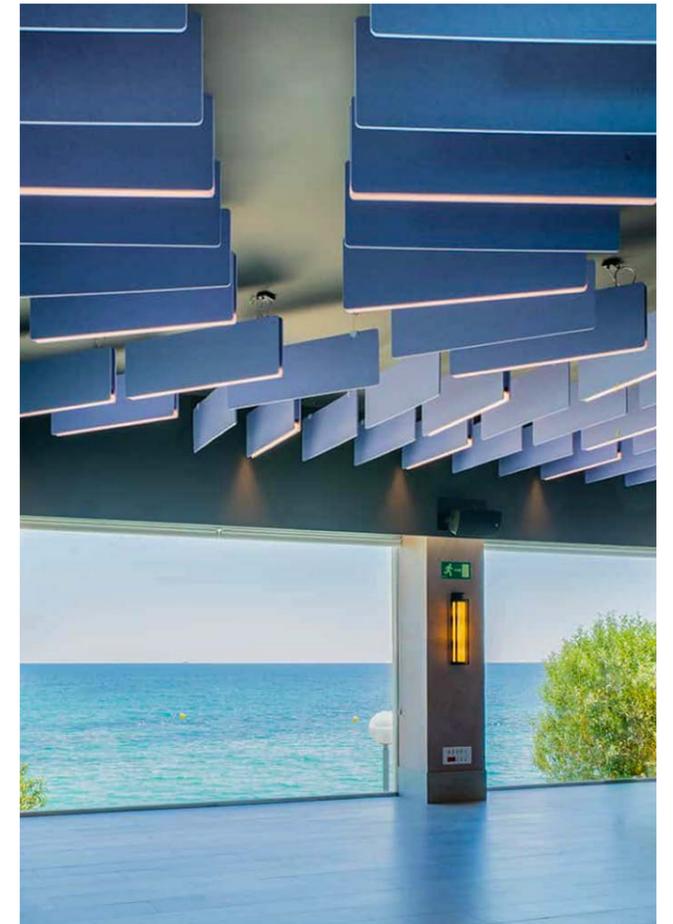

BPM ACOUSTIC PROJECT
HOTEL MELIÁ ALICANTE



Integrated acoustic lighting combines illumination and sound absorption within a single architectural system, enhancing both visual and acoustic comfort.

We use **recycled PET acoustic panels**, made from 100% polyester fibre with at least 75% post-consumer recycled content.

The material, sourced from recovered plastic waste, is integrated as a responsible and efficient solution.

Each project can be developed **bespoke**, adapting dimensions, configurations and finishes.

Custom panels with **integrated, discreet lighting** reduce reverberation while delivering controlled, high-quality illumination.

La iluminación acústica integrada combina luz y absorción sonora en un único sistema arquitectónico, mejorando el confort visual y acústico del espacio.

Utilizamos paneles acústicos de PET reciclado, compuestos al 100% por fibra de poliéster con al menos un 75% de contenido reciclado posconsumo.

El material, procedente de residuos plásticos recuperados, se integra como una solución responsable y eficiente.

Cada proyecto puede desarrollarse a medida, adaptando dimensiones, configuraciones y acabados.

Paneles personalizados con iluminación integrada y discreta reducen la reverberación mientras ofrecen una iluminación controlada y de alta calidad.

SUSTAINABILITY, ACOUSTICS & LIGHTING IN ONE SOLUTION

CHOOSE THE ACOUSTIC COLOR YOU WANT.
DESIGN ANY SHAPE.
COMBINE IT HOWEVER YOU LIKE.
INTEGRATE LIGHT WHEREVER YOU IMAGINE.

COLORS




&
MORE



SHAPES



CUT PATTERNS

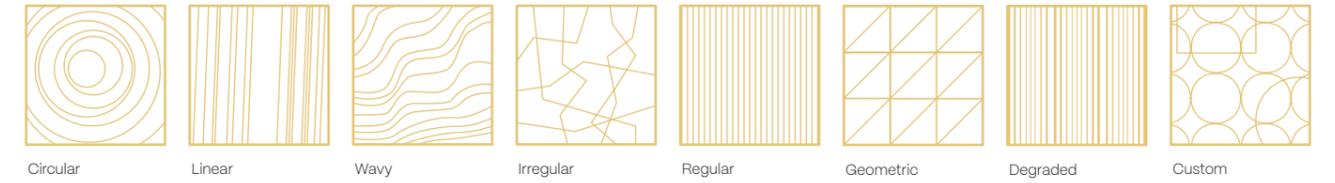

HOLES




CUTS



INSTALLATIONS




DESIGNS

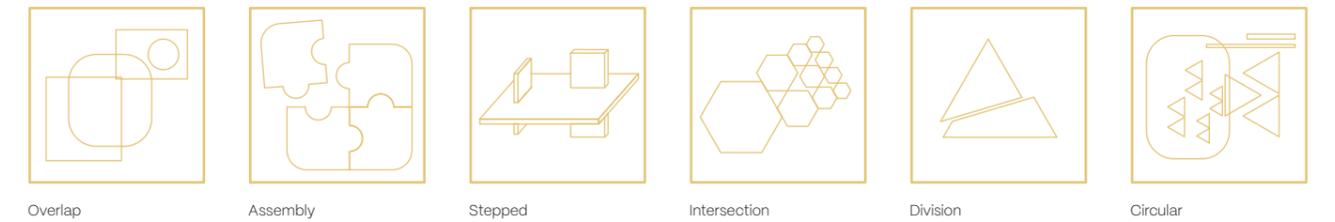

PRINT



LUMINAIRE INTEGRATION

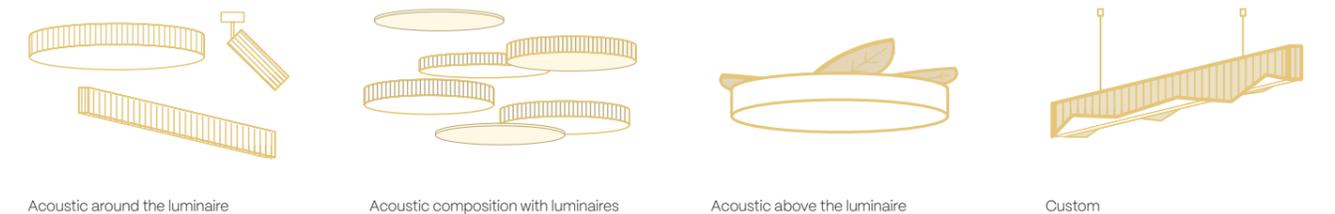


ACOUSTIC ALBERTA SOFT

- ALUMINIUM SILICONE
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE



ACOUSTIC ALBERTA SOFT

1. PENDANT

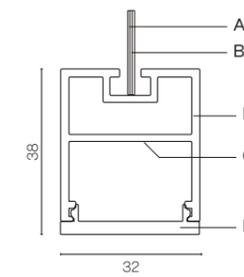


IP40

POWER HIGH

		Int. Ø286 - Ext. Ø350	Int. Ø386 - Ext. Ø450	Int. Ø586 - Ext. Ø650	Int. Ø886 - Ext. Ø950	Int. Ø1186 - Ext. Ø1250
	700 mA	56 W 5280 - 5316 - 5844 lm	76 W 7086 - 7121 - 7747 lm	88 W 8785 - 9040 - 9687 lm	132 W 13298 - 13519 - 14703 lm	176 W 17816 - 18118 - 18135 lm
Silicone	2700 K	556EC1 312 ✖	556ED1 312 ✖	556EF1 312 ✖	556E1 312 ✖	556EK1 312 ✖
	3000 K	556EC1 313 ✖	556ED1 313 ✖	556EF1 313 ✖	556E1 313 ✖	556EK1 313 ✖
	4000 K	556EC1 315 ✖	556ED1 315 ✖	556EF1 315 ✖	556E1 315 ✖	556EK1 315 ✖

Silicone



LUMINAIRE INCLUDES

- 3 x Suspension cables 3m
- 1 x Feed Hose 3 x 0,75mm² (.125 1 Feed Hose 5 x 0,75mm²)
- Electric system
- Connection Box CB03 + Driver Box CB04.OP
- Cover Kit

The data shown corresponds to raw values.

- A** - Aircraft cable (3 m)
- B** - Power cable
- C** - LED module
- D** - Diffuser
- E** - Aluminium profile

Down light

FINISH

- K** - Special color - White
- L** - Special color - Black

DIMM OPTIONS

- O** - On-Off
- D** - Dali
- P** - Push
- V** - 1.10v

ACOUSTIC ALABAMA

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



ACOUSTIC ALABAMA / ALABAMA SQ

POWER STANDARD – ACOUSTIC ROUND ALABAMA

		Ø800	Ø1000	Ø1200
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	17 W 2454 - 2907 - 3129 lm	17 W 2454 - 2907 - 3129 lm
	2700 K	557EB ✖ ✖ 112 ✖	557EE ✖ ✖ 112 ✖	557EH ✖ ✖ 112 ✖
	3000 K	557EB ✖ ✖ 113 ✖	557EE ✖ ✖ 113 ✖	557EH ✖ ✖ 113 ✖
	4000 K	557EB ✖ ✖ 115 ✖	557EE ✖ ✖ 115 ✖	557EH ✖ ✖ 115 ✖

POWER STANDARD – ACOUSTIC SQUARE ALABAMA

		800 800	1000 1000	1200 1200
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	17 W 2454 - 2907 - 3129 lm	17 W 2454 - 2907 - 3129 lm
	2700 K	558EB ✖ ✖ 112 ✖	558EE ✖ ✖ 112 ✖	558EH ✖ ✖ 112 ✖
	3000 K	558EB ✖ ✖ 113 ✖	558EE ✖ ✖ 113 ✖	558EH ✖ ✖ 113 ✖
	4000 K	558EB ✖ ✖ 115 ✖	558EE ✖ ✖ 115 ✖	558EH ✖ ✖ 115 ✖

Opal



LUMINAIRE INCLUDES

- 3 x Suspension cables 3m
- NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
- DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
- Connection box CB03 with luminaire's finish

The data shown corresponds to raw values.

Down light

FINISH

- K · Special color - White
- L · Special color - Black

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v



ACOUSTIC ALARIK SLIM

- ALUMINIUM
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE




ACOUSTIC ALARIK SLIM

PENDANT

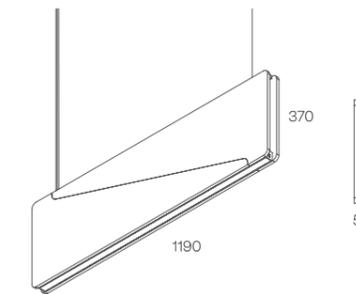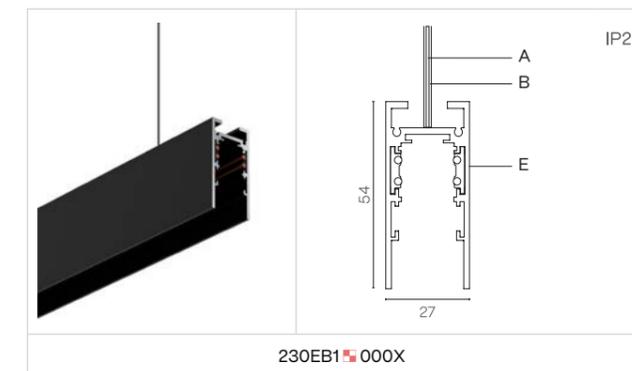

Multiple module configurations available. See page 166 for all Alarik Slim options, modules and power outputs.

MODULES

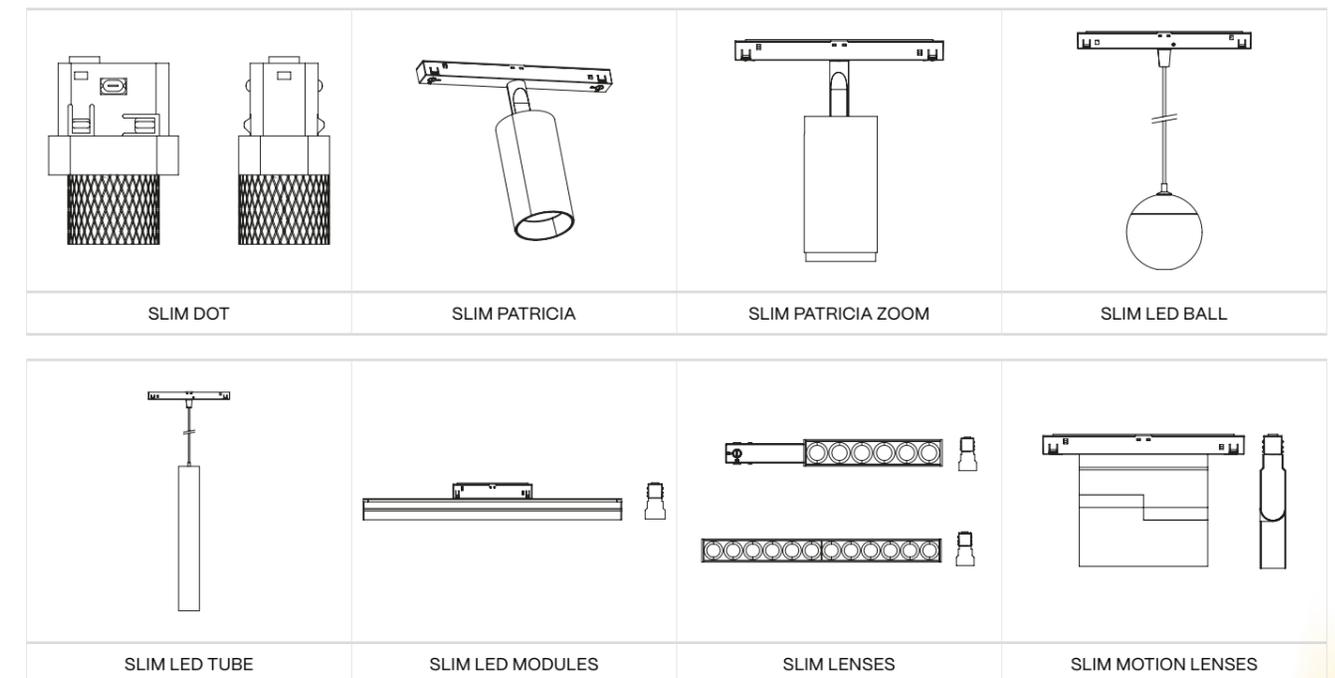

- A - Aircraft cable (3 m)
- B - Power cable
- E - Aluminium profile


☑ Down light

FINISH

- K · Special color - White
- L · Special color - Black

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

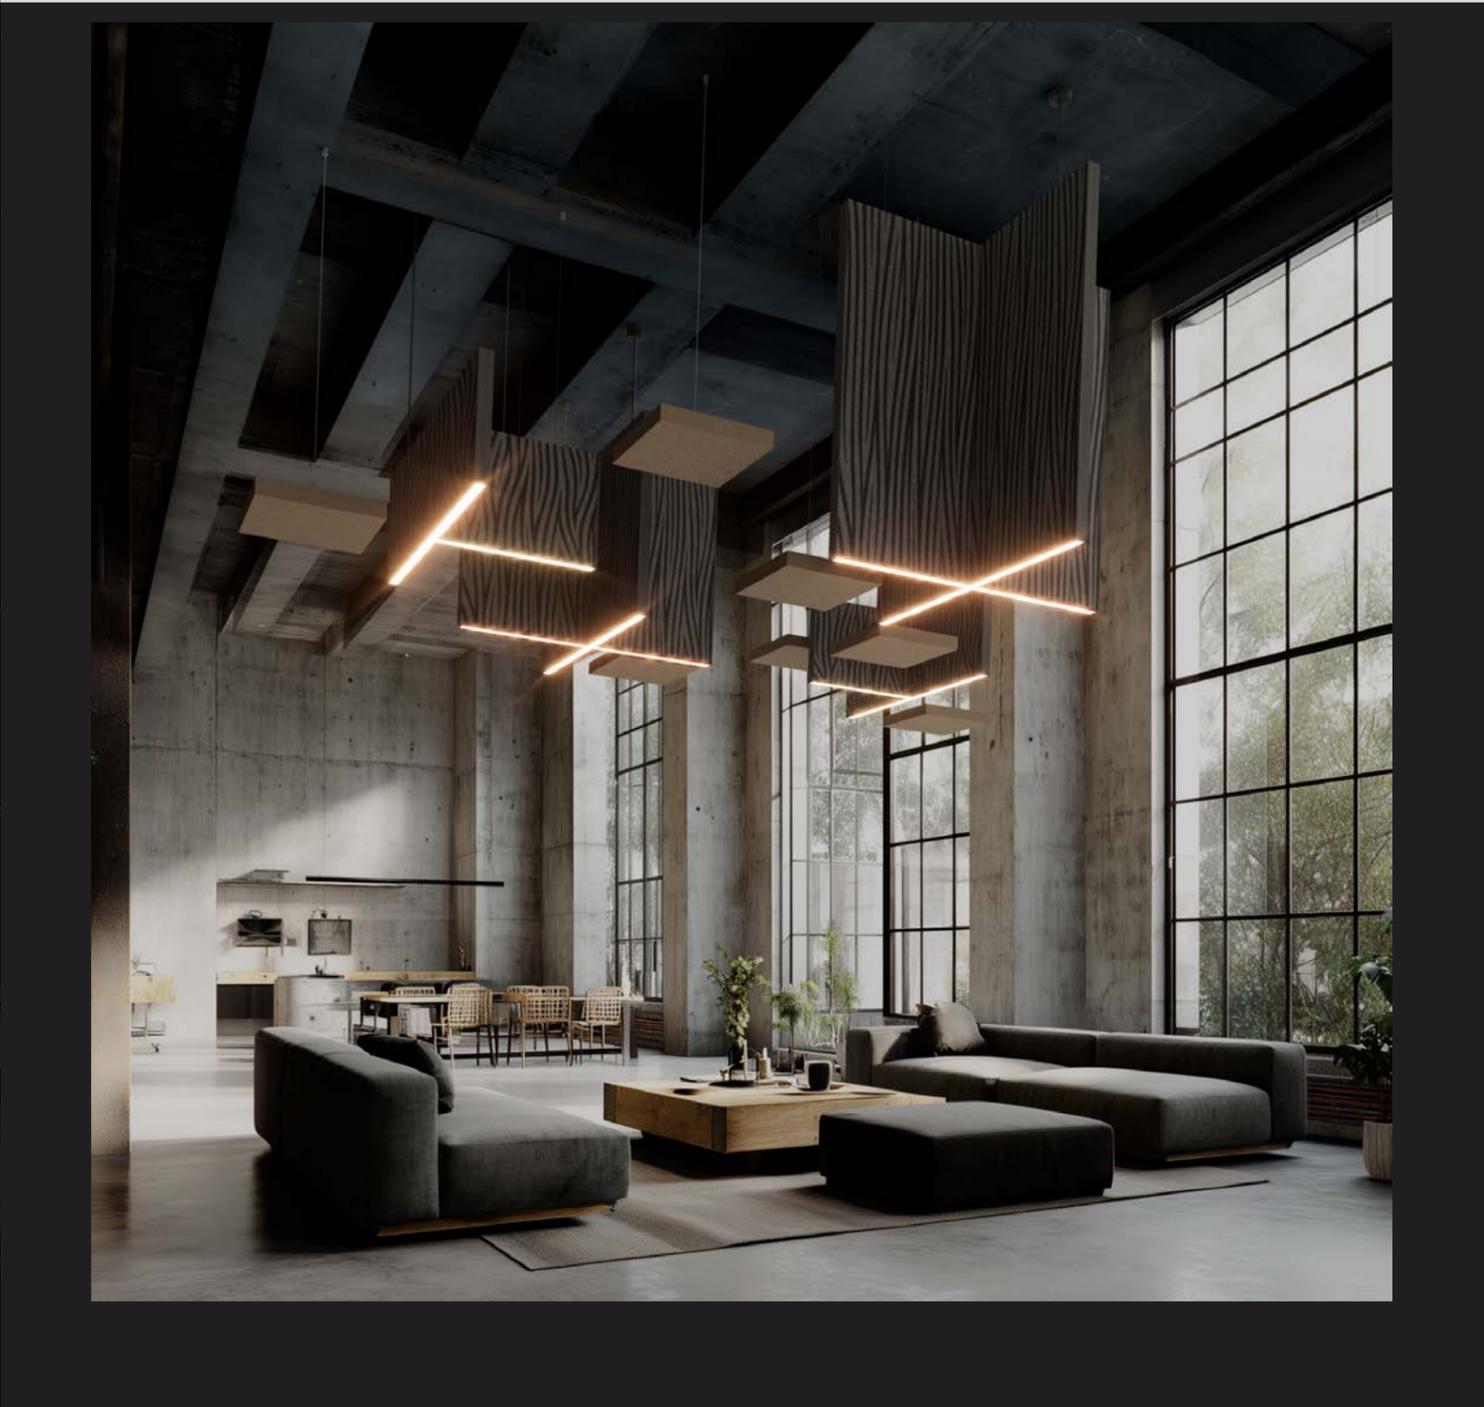

ACOUSTIC ALBA MINI



- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE



ACOUSTIC ALBA MINI


1. PENDANT

IP40

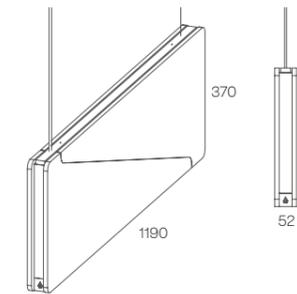

POWER STANDARD

		PENDANT	
	500 mA	22 W	3272 - 3876 - 4172 lm
Opal	2700 K	554EB1 112 ✖	
	3000 K	554EB1 113 ✖	
	4000 K	554EB1 115 ✖	
Microprismatic	2700 K	554EB1 122 ✖	
	3000 K	554EB1 123 ✖	
	4000 K	554EB1 125 ✖	

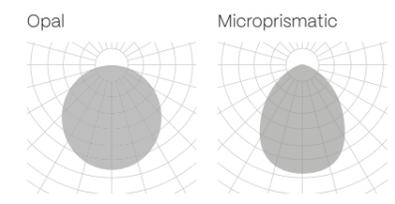

- LUMINAIRE INCLUDES**
- 2 x Suspension cables 3m
 - NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
 - DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
 - Diffuser
 - Cover Kit
 - Connection Box CB09.12

The data shown corresponds to raw values.

- A** - Aircraft cable (3 m)
- B** - Power cable
- C** - LED module
- D** - Diffuser
- E** - Aluminium profile
- Down light
- FINISH**
 - K** - Special color - White
 - L** - Special color - Black
- DIMM OPTIONS**
 - O** - On-Off
 - D** - Dali
 - P** - Push
 - V** - 1.10v

ACOUSTIC ALBA


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

Designed by **Rafa Ortega**
Diseñado por **Rafa Ortega**




ACOUSTIC ALBA

1. PENDANT

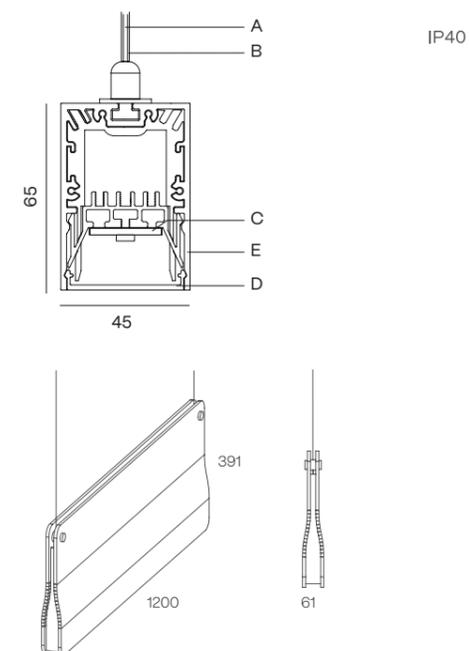


2. SURFACE

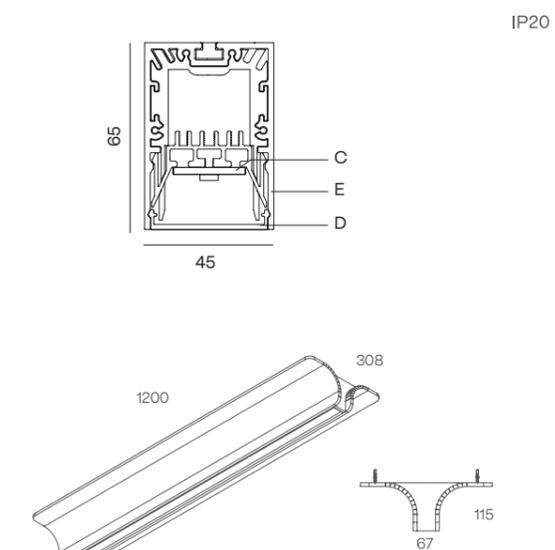

POWER STANDARD

		PENDANT	SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	552EB1 112 ✖	552EB3 112 ✖
	3000 K	552EB1 113 ✖	552EB3 113 ✖
	4000 K	552EB1 115 ✖	552EB3 115 ✖
Microprismatic	2700 K	552EB1 122 ✖	552EB3 122 ✖
	3000 K	552EB1 123 ✖	552EB3 123 ✖
	4000 K	552EB1 125 ✖	552EB3 125 ✖

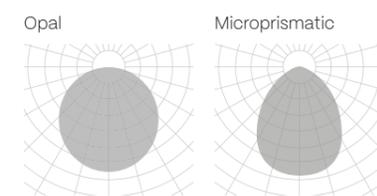

The data shown corresponds to raw values.

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

Down light

LUMINAIRE INCLUDES
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
Diffuser - Cover Kit
Connection Box CB09.12
Surface mounting kit

- FINISH**
K · Special color - White
L · Special color - Black
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v




02 | ACOUSTIC ALABAMA SUPER SLIM



ACOUSTIC LAMBDA



- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

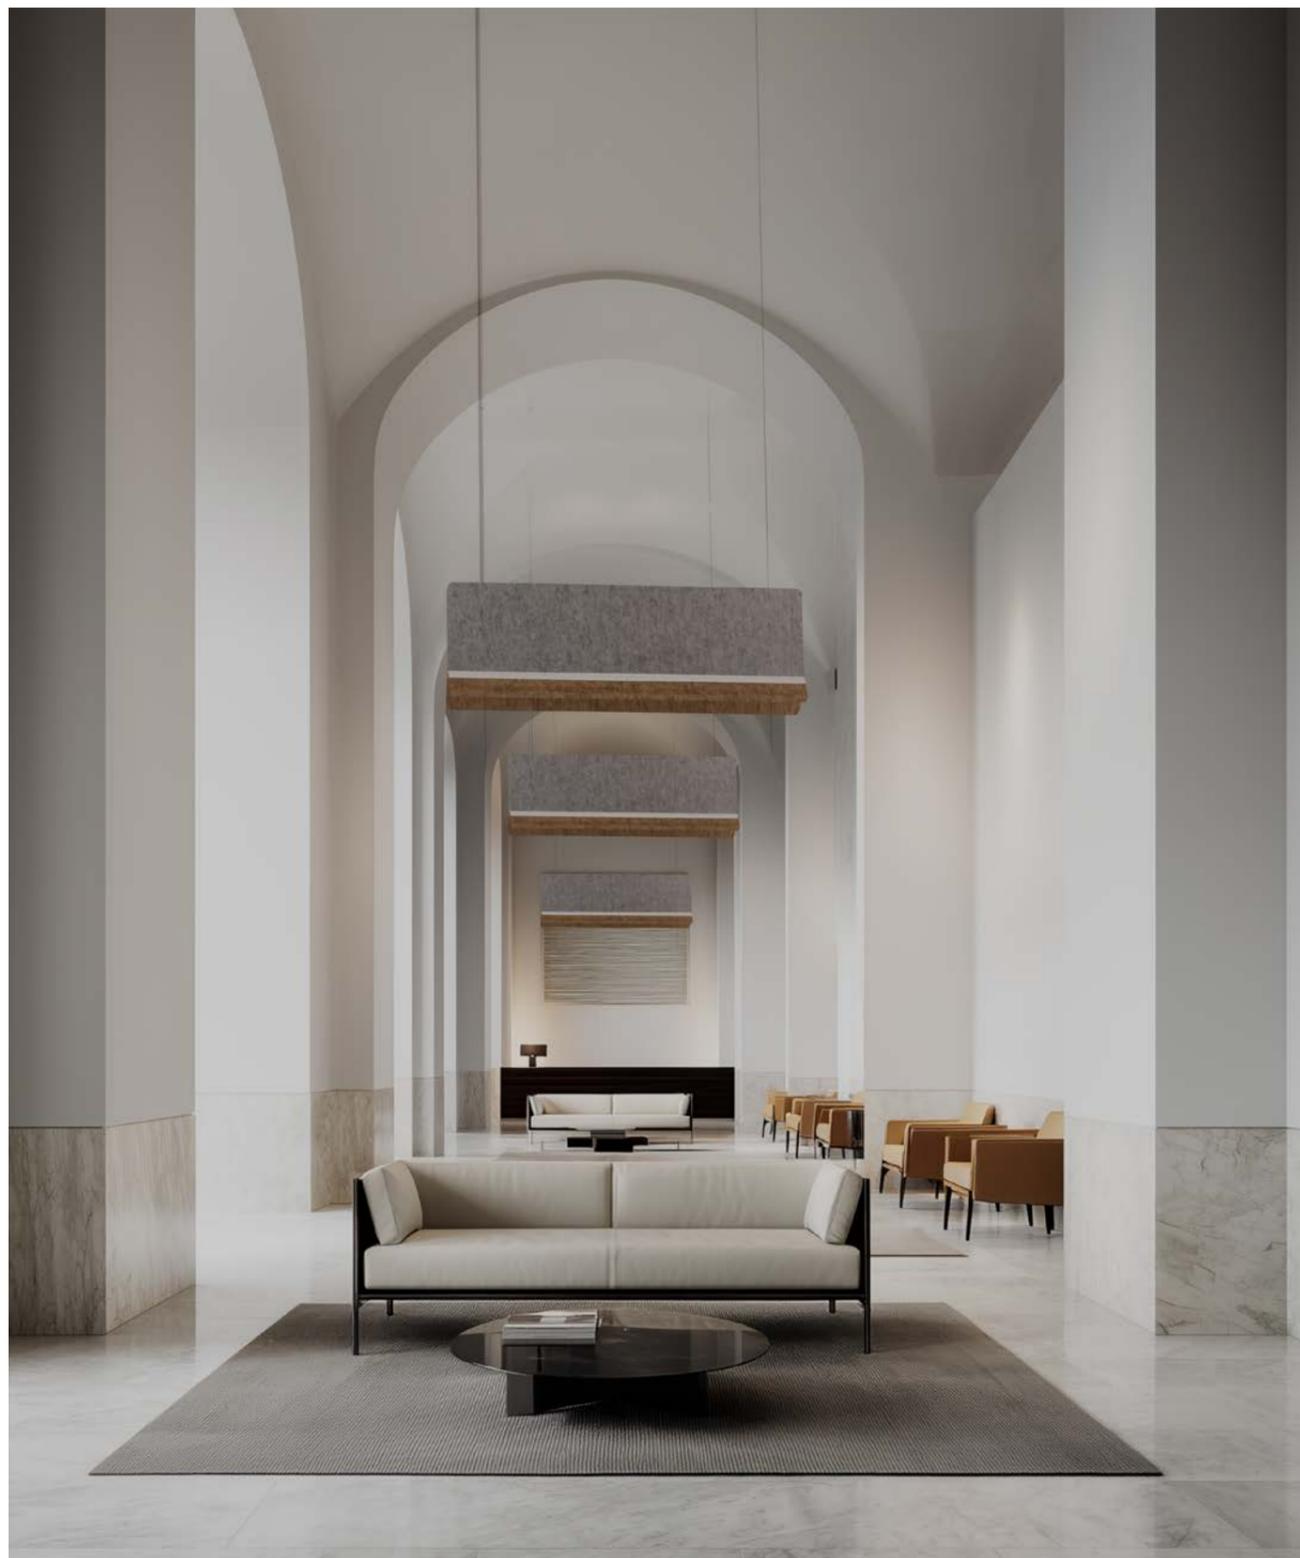

ACOUSTIC LAMBDA



1. PENDANT

IP40

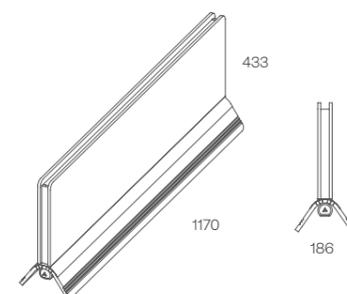


2. SURFACE

IP20

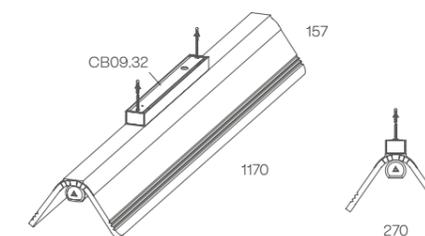

POWER STANDARD

		PENDANT	SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	553EB1 112 ✖	553EB3 112 ✖
	3000 K	553EB1 113 ✖	553EB3 113 ✖
	4000 K	553EB1 115 ✖	553EB3 115 ✖
Microprismatic	2700 K	553EB1 122 ✖	553EB3 122 ✖
	3000 K	553EB1 123 ✖	553EB3 123 ✖
	4000 K	553EB1 125 ✖	553EB3 125 ✖

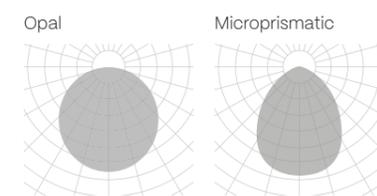

The data shown corresponds to raw values.

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

Down light

LUMINAIRE INCLUDES

- 2 x Suspension cables 3m
- NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
- DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
- Diffuser
- Cover Kit
- Connection Box CB09.12
- Surface mounting kit

FINISH


- K - Special color - White
- L - Special color - Black

DIMM OPTIONS

- O - On-Off
- D - Dali
- P - Push
- V - 1.10v

ACOUSTIC LINGGO MINI


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP40
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

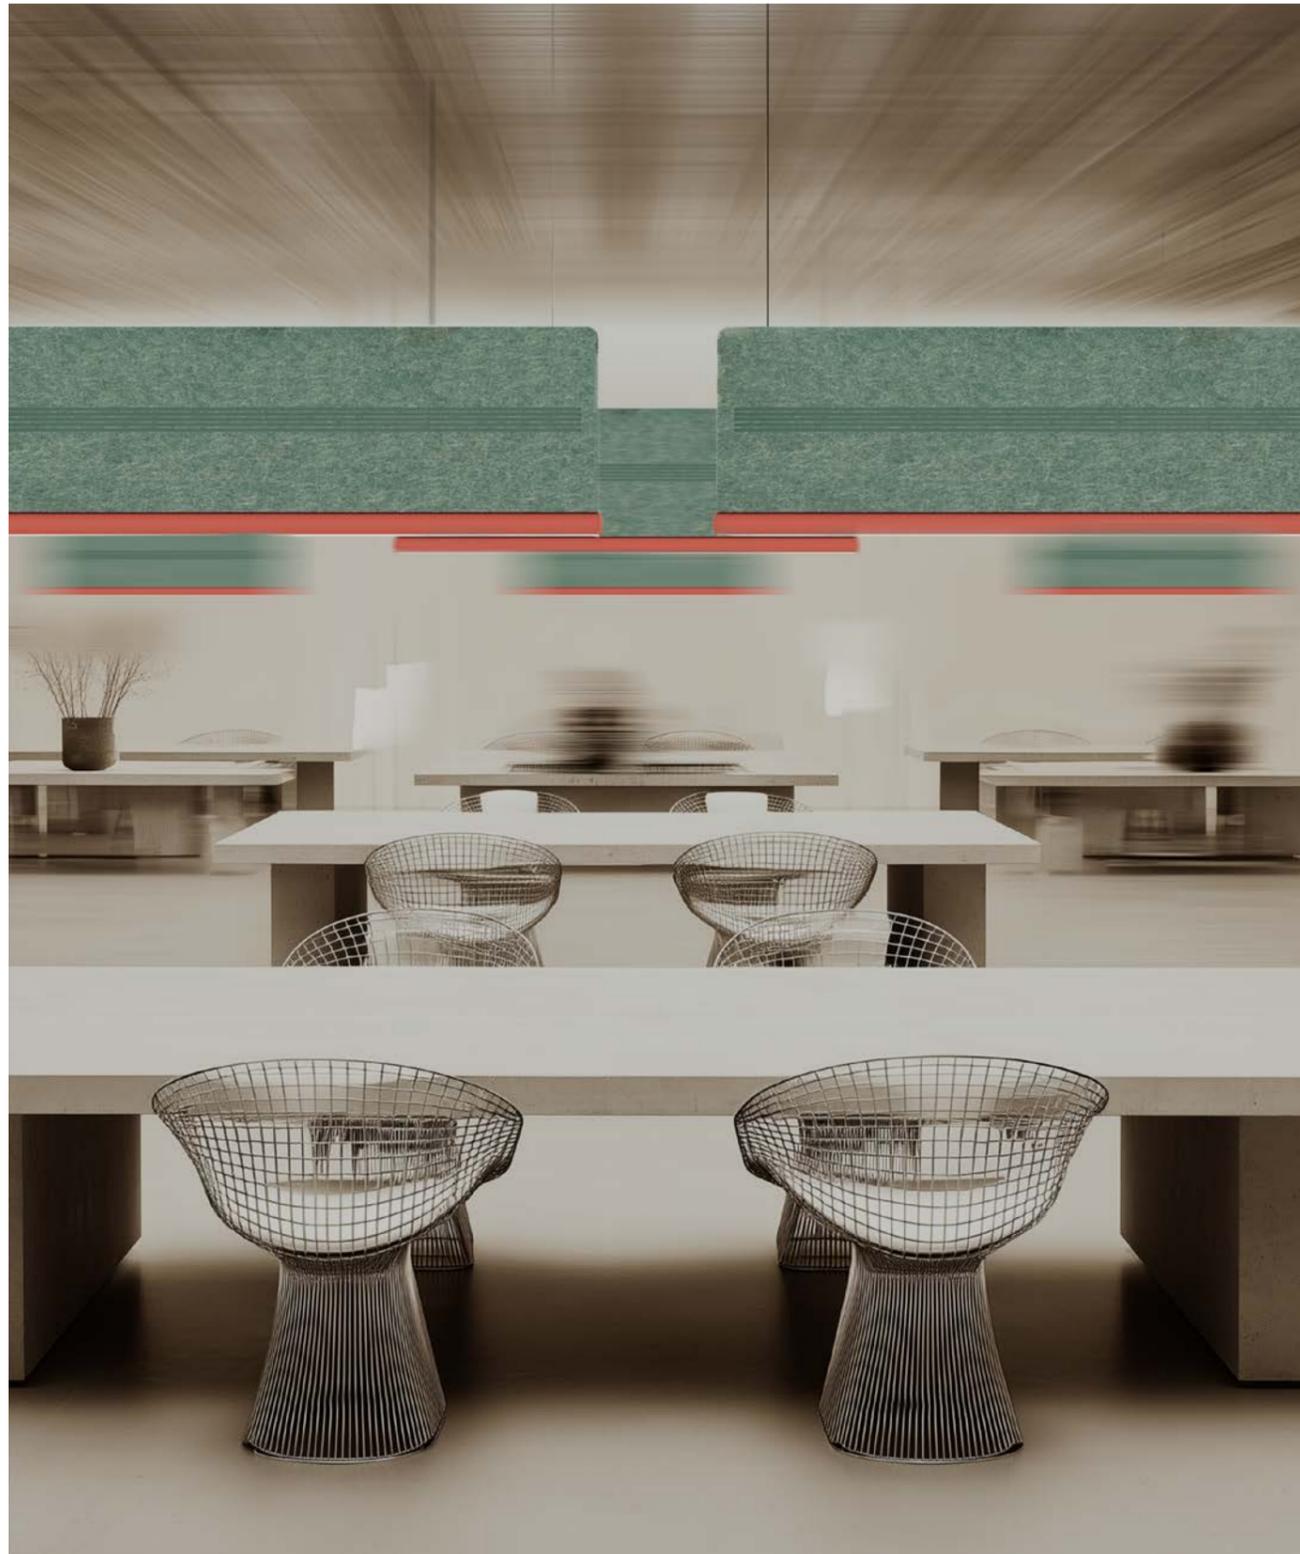

ACOUSTIC LINGGO MINI


1. PENDANT

IP40

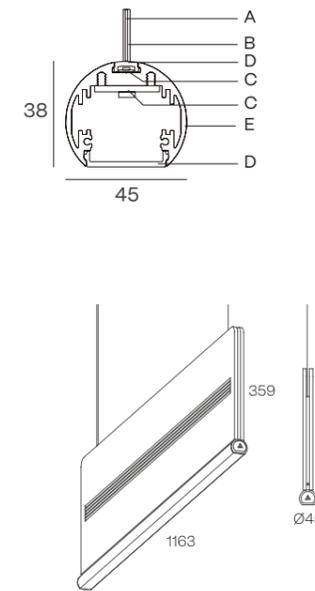

POWER STANDARD

		PENDANT	
	500 mA	22 W 3272 - 3876 - 4172 lm	
Opal	2700 K	552EB1 112 ✖	
	3000 K	552EB1 113 ✖	
	4000 K	552EB1 115 ✖	
Microprismatic	2700 K	552EB1 122 ✖	
	3000 K	552EB1 123 ✖	
	4000 K	552EB1 125 ✖	

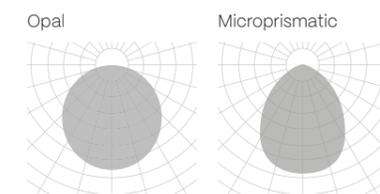

The data shown corresponds to raw values.

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile


Down light

FINISH

- K - Special color - White
- L - Special color - Black

DIMM OPTIONS

- O - On-Off
- D - Dali
- P - Push
- V - 1.10v

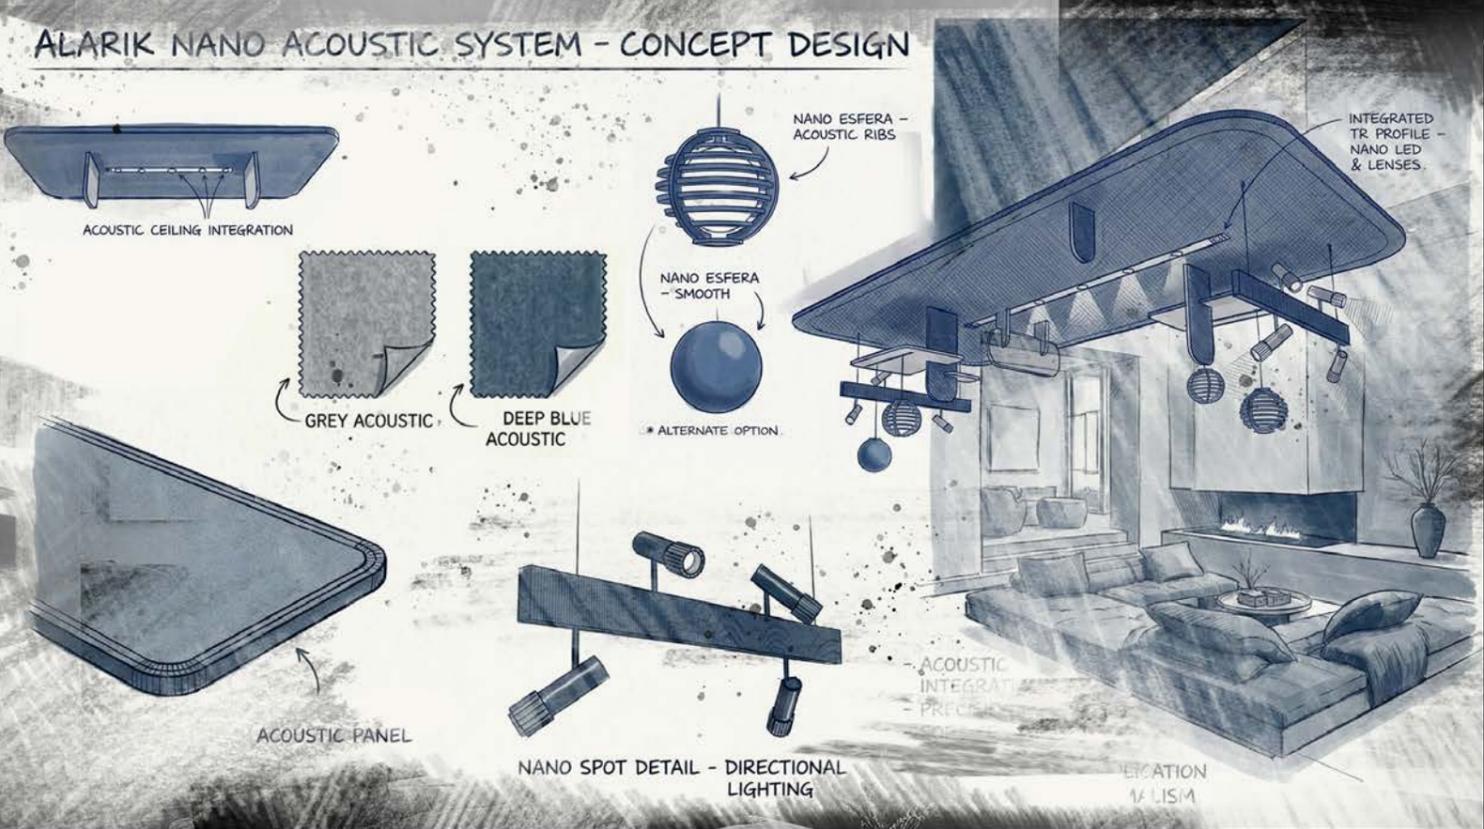

ACOUSTIC ALZIRA


- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

Designed by **Rafa Ortega**
Diseñado por **Rafa Ortega**




ACOUSTIC ALZIRA

1. PENDANT

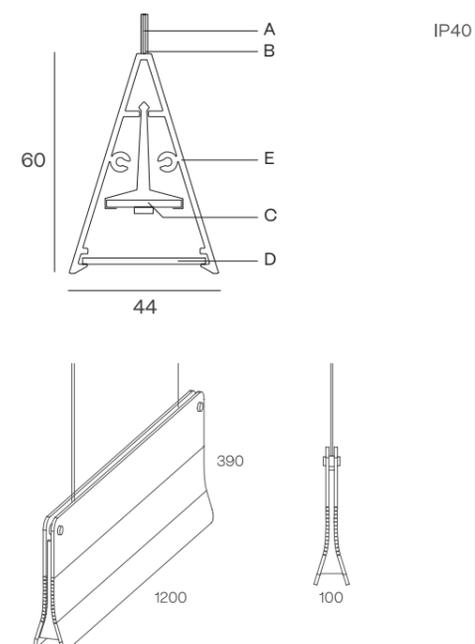


2. WALL SURFACE

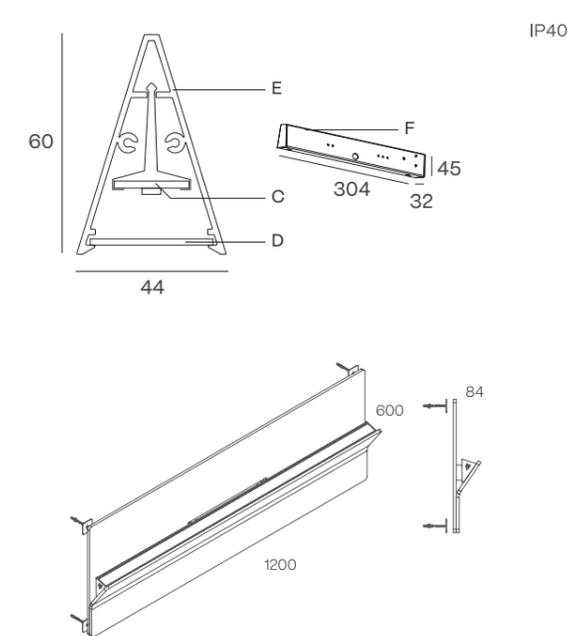

POWER STANDARD

		PENDANT	WALL SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	550EB1 112 ✖	550EB7 112 ✖
	3000 K	550EB1 113 ✖	550EB7 113 ✖
	4000 K	550EB1 115 ✖	550EB7 115 ✖
Microprismatic	2700 K	550EB1 122 ✖	550EB7 122 ✖
	3000 K	550EB1 123 ✖	550EB7 123 ✖
	4000 K	550EB1 125 ✖	550EB7 125 ✖

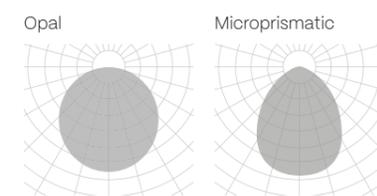

The data shown corresponds to raw values.

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile
- F - Mounting kit

Down light

LUMINAIRE INCLUDES

- 2 x suspension cables 3m
- NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
- Connection Box (CB09.32)
- Cover Kit
- Diffuser

FINISH


- K - Special color - White
- L - Special color - Black

DIMM OPTIONS

- O - On-Off
- D - Dali
- P - Push
- V - 1.10v

ACOUSTIC KLIMT FIX

- ALUMINIUM PC
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- IP20
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

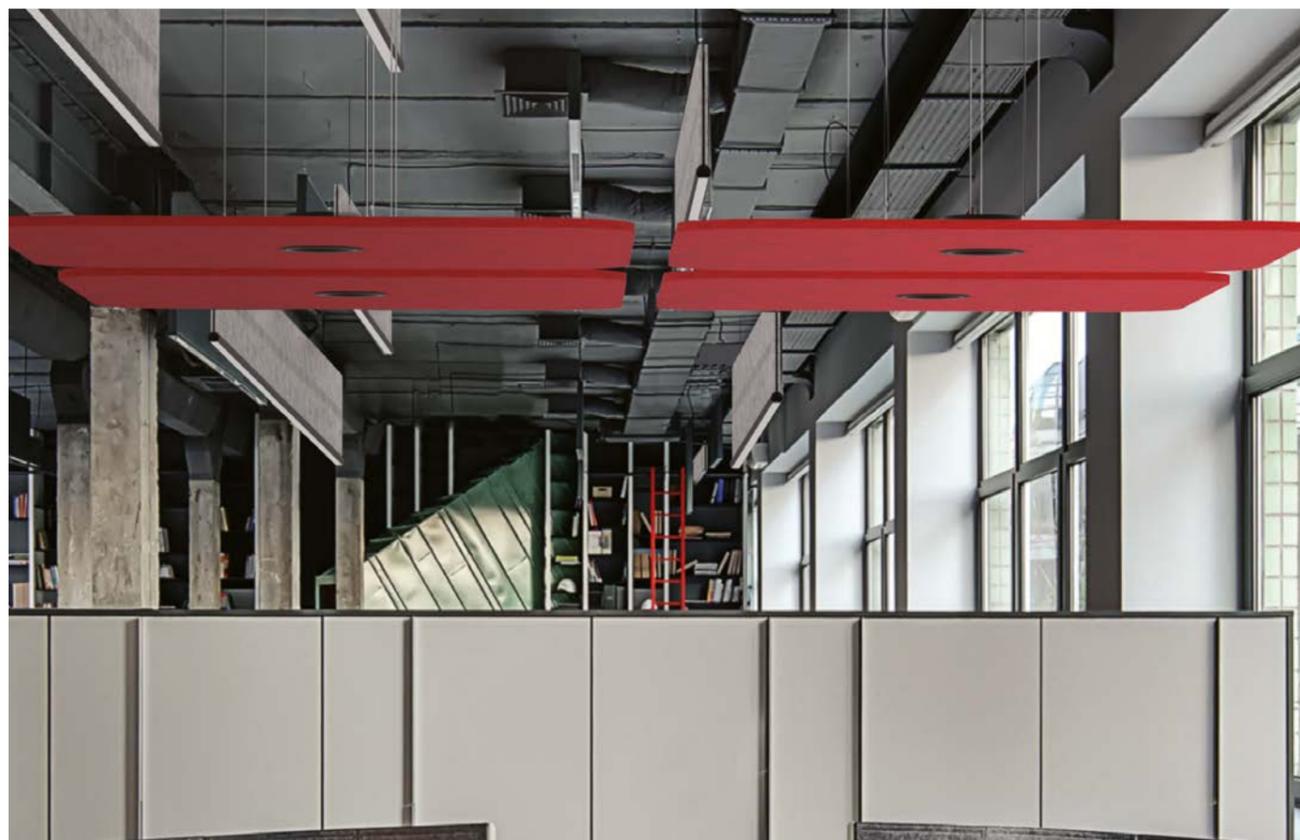


ACOUSTIC KLIMT FIX / KLIMT FIX SQ

POWER STANDARD – ACOUSTIC ROUND KLIMT FIX

	Ø800	Ø1000	Ø1200
500 mA	12 W 1735 - 1766 - 1844 lm	12 W 1735 - 1766 - 1844 lm	12 W 1735 - 1766 - 1844 lm
15° - 25° - 38° - 60°	2700 K	559EB1 1 2	559EE1 1 2
	3000 K	559EB1 1 3	559EE1 1 3
	4000 K	559EB1 1 5	559EE1 1 5

POWER STANDARD – ACOUSTIC SQUARE KLIMT FIX

	800x800	1000x1000	1200x1200
500 mA	12 W 1735 - 1766 - 1844 lm	12 W 1735 - 1766 - 1844 lm	12 W 1735 - 1766 - 1844 lm
15° - 25° - 38° - 60°	2700 K	560EB1 1 2	560EE1 1 2
	3000 K	560EB1 1 3	560EE1 1 3
	4000 K	560EB1 1 5	560EE1 1 5

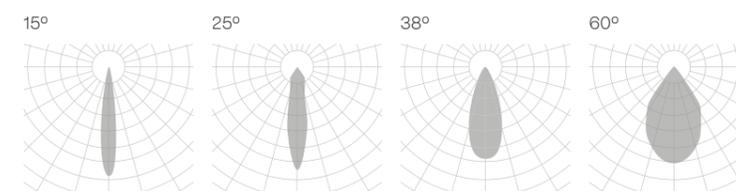

The data shown corresponds to raw values.



Down light

FINISH
 K · Special color - White
 L · Special color - Black

BEAM ANGLE
 2 · 15°
 4 · 25°
 5 · 38°
 7 · 60°

DIMM OPTIONS
 O · On-Off
 D · Dali
 P · Push
 V · 1.10v

LUMINAIRE INCLUDES
 3 x Suspension cables 3m
 1 x Feed Hose 3 x 0,75mm²
 Connection box CB03 BK or WH finish

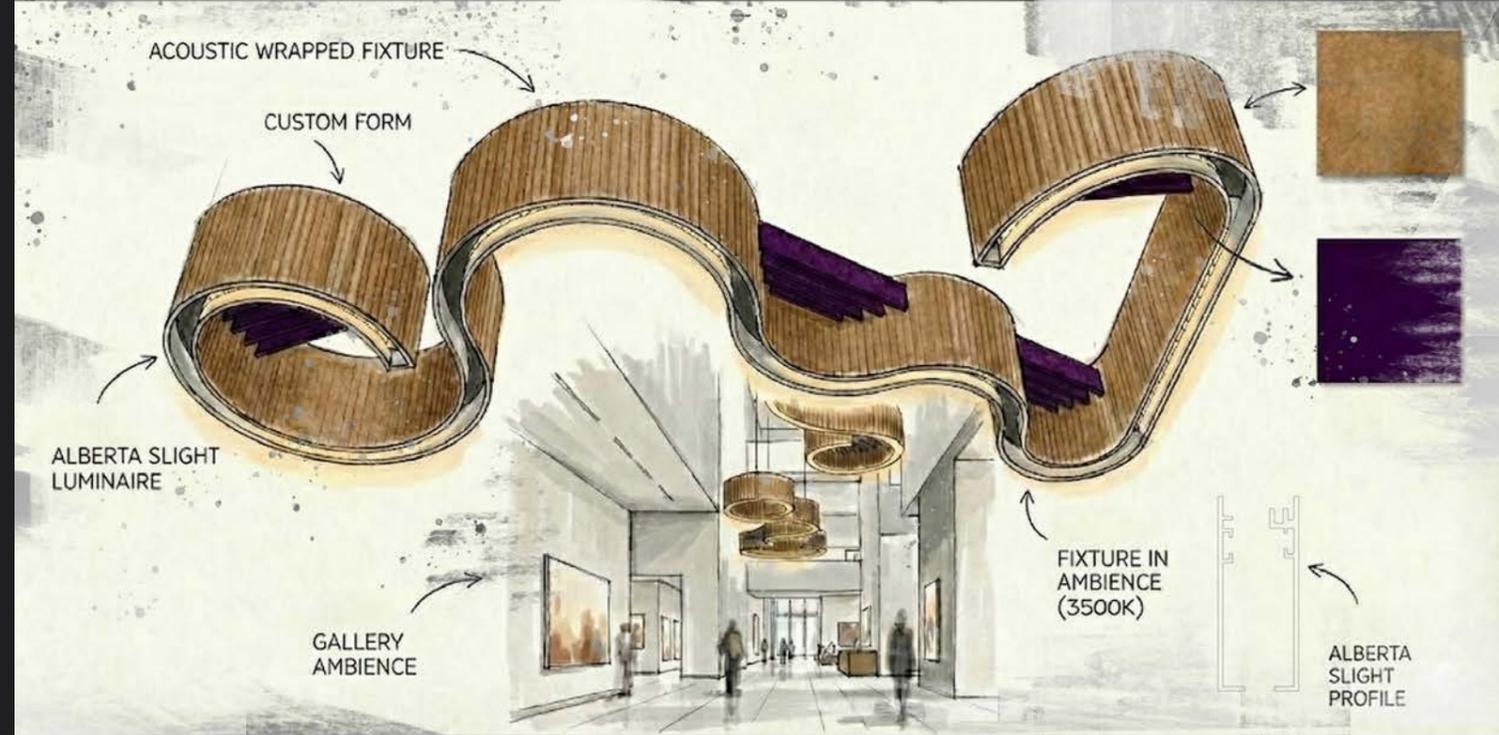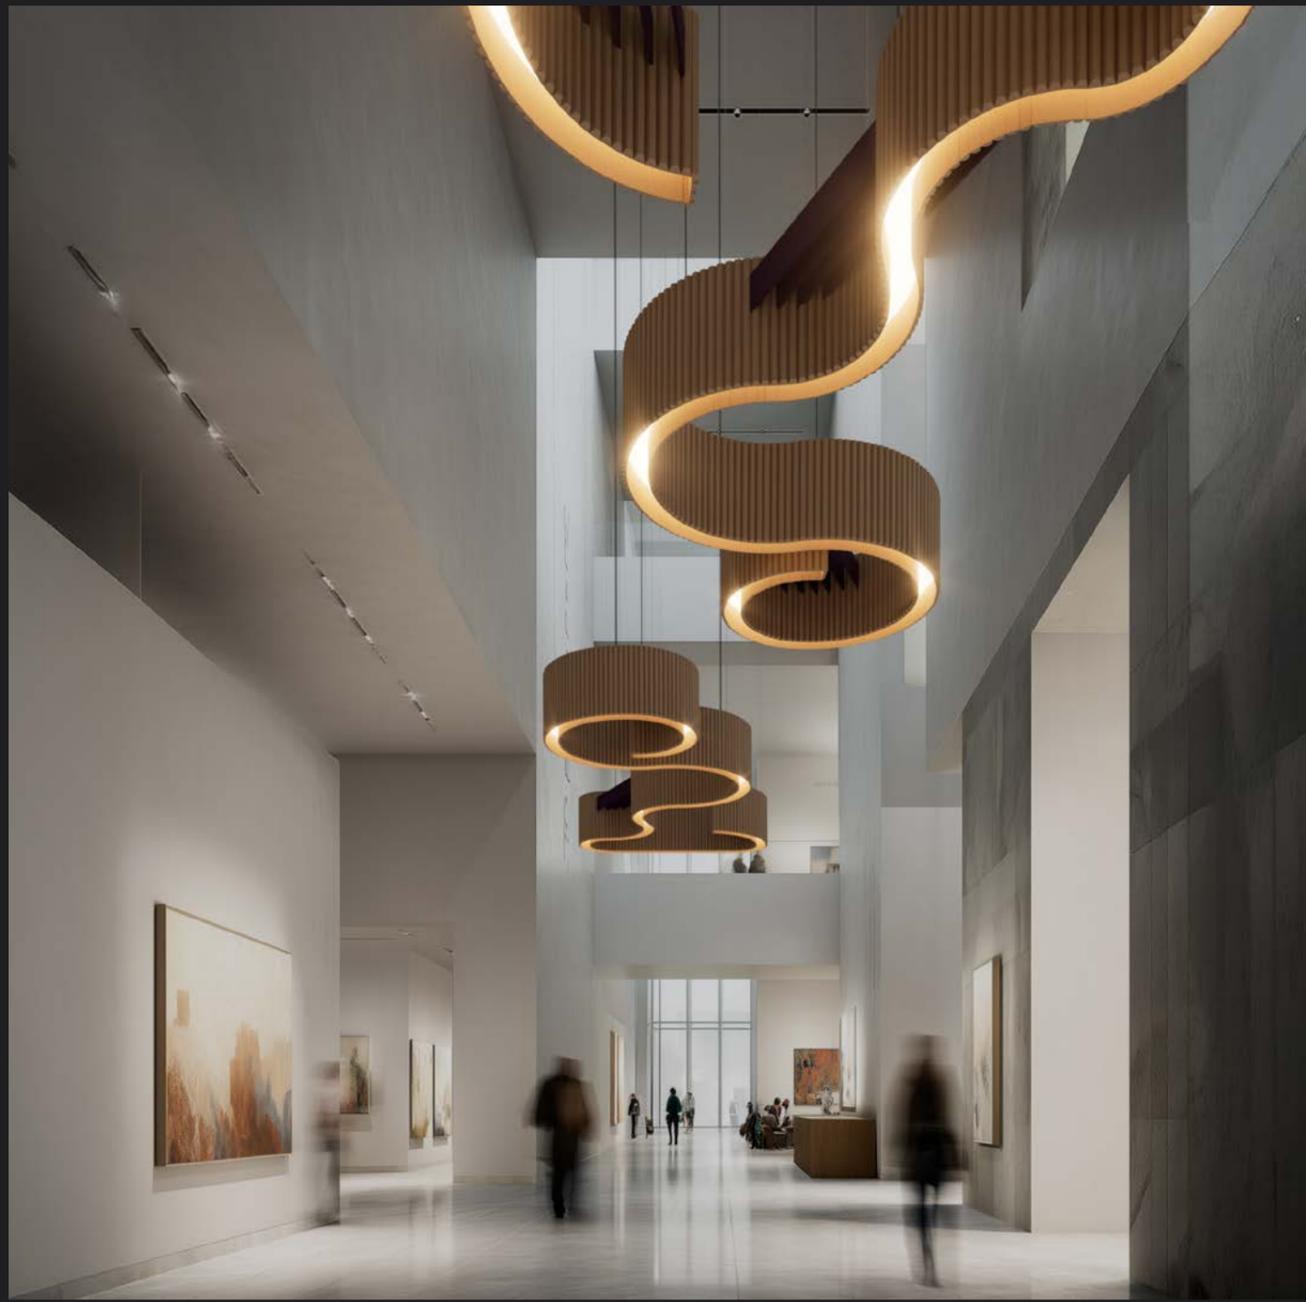

04 | ACOUSTIC ALBERTA SLIGHT CUSTOM




ACOUSTIC ACCESSORIES



ACOUSTIC ACCESSORIES



PENDANT ACCESSORIES

 Ø800	 Ø1000	 Ø1200	 800x800	 1000x1000	 1200x1200
AC.RD.01.PN. 	AC.RD.02.PN. 	AC.RD.03.PN. 	AC.SQ.01.PN. 	AC.SQ.02.PN. 	AC.SQ.03.PN. 



	 2400 300 600	 2400 600		 2400 300 600	 2400 600
AC.VT.01.PN. 	AC.VT.02.PN. 		AC.FL.01.PN. 	AC.FL.02.PN. 	

SURFACE ACCESSORIES

 Ø800	 Ø1000	 Ø1200	 800x800	 1000x1000	 1200x1200
AC.RD.01.SR. 	AC.RD.02.SR. 	AC.RD.03.SR. 	AC.SQ.01.SR. 	AC.SQ.02.SR. 	AC.SQ.03.SR. 

	 2400 300 600	 2400 600		 2400 300 600	 2400 600
AC.VT.01.PN. 	AC.VT.02.SR. 		AC.FL.01.SR. 	AC.FL.02.SR. 	

MD PANEL

	 600 600	 1200 600
AC.MD.01.RF. 	AC.MD.02.RF. 	

 FINISH
S - Special color



La luz más allá del interior

Diseñada para integrarse de forma natural en el entorno exterior, la luz prolonga la intención arquitectónica más allá del interior. Recorridos, volúmenes y superficies se definen con precisión, permitiendo que los espacios exteriores se comprendan, se utilicen y se vivan también de noche.

Desarrollada para responder a las condiciones del exterior, la iluminación combina una construcción robusta con una distribución controlada de la luz, garantizando confort visual, durabilidad y una transición fluida entre la arquitectura interior y exterior.

Light beyond the interior

Designed to integrate naturally into outdoor environments, light extends architectural intent beyond interior spaces. Paths, volumes and surfaces are defined with precision, allowing exterior spaces to be read, used and experienced after dark.

Developed to respond to outdoor conditions, outdoor lighting combines robust construction with controlled light distribution, ensuring visual comfort, durability and a seamless transition between interior and exterior architecture.

OUTDOOR

WALL ARA OUT

PAG. 460

WALL ZAHARA OUT

PAG. 462

WALL DRACO OUT

PAG. 464

OUTDOOR




WALL ARA OUT



WALL ARA OUT

L172

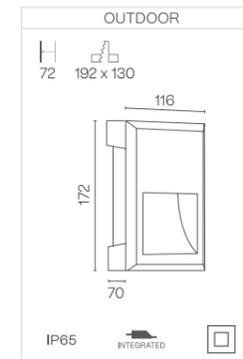

POWER STANDARD – Wall recessed installation

		L172	
Opal	310 mA	4 W 389 - 401 - 436 lm	
	2700 K	685EB7X112O	
	3000 K	685EB7X113O	
	4000 K	685EB7X115O	

The data shown corresponds to raw values.



LUMINAIRE INCLUDES
Recessed mounting kit


WALL ZAHARA OUT

- CEMENT
- CRI ≥90
- IK08
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- OUTDOOR
- 220-240 V 50-60 Hz
- CE



WALL ZAHARA OUT

L381

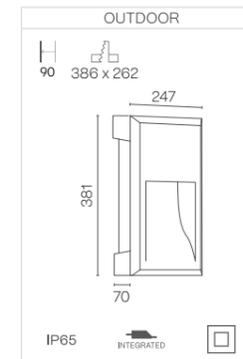

POWER STANDARD – Wall recessed installation

		L381	
Opal	550 mA	9 W 484 – 510 – 534 lm	
	2700 K	687EB7X112O	
	3000 K	687EB7X113O	
	4000 K	687EB7X115O	

The data shown corresponds to raw values.

- Cut hole
- H Minimum height of the false ceiling

- ☑ Down light


LUMINAIRE INCLUDES
Recessed mounting kit

WALL DRACO OUT



WALL DRACO OUT

L370

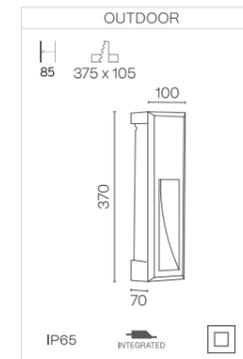

POWER STANDARD – Wall recessed installation

		L370	
Opal	290 mA	5 W 465 - 480 - 525 lm	
	2700 K	686EB7X112O	
	3000 K	686EB7X113O	
	4000 K	686EB7X115O	

The data shown corresponds to raw values.



LUMINAIRE INCLUDES
Recessed mounting kit

Cuando la luz se convierte en materia

Desarrollado y elaborado artesanalmente en España, Crismosil® es el material exclusivo de BPM Lighting, creado para integrar la luz de forma natural en la arquitectura. La combinación de yeso técnico, fibra de vidrio y resinas acrílicas ofrece la resistencia del aluminio junto a una estética pura, continua y arquitectónica.

Cada pieza se fabrica a mano con precisión, permitiendo una personalización total en formas, colores y texturas. Más que un material, Crismosil® refleja el compromiso de BPM Lighting con el diseño, la artesanía y una producción responsable y local.

Crismosil® · When light becomes matter

Developed and handcrafted in Spain, Crismosil® is BPM Lighting's exclusive material, created to integrate light seamlessly into architecture. By combining technical plaster, fiberglass and acrylic resins, it achieves the strength of aluminium with a pure, continuous and architectural aesthetic.

Each piece is handmade with precision, allowing full customisation in shapes, colours and textures. More than a material, Crismosil® embodies BPM Lighting's approach to design, craftsmanship and responsible, local production.

CRISMOSIL

< **NUVOL**

PAG. 470

WAVE

PAG. 474

SAND

PAG. 480

MENORCA

PAG. 486

ALBA PRO CRISMOSIL

PAG. 494

ZENIT

PAG. 500

VEGA

PAG. 518

ESPIGA

PAG. 528

ORBIT

PAG. 538

DRACO

PAG. 544

LYRA

PAG. 552

CRISMOSIL



NUVOL FAMILY


MEDITE
RRANEAN
Collection

SOON



CRISMOSIL CRI ≥90 IK06 LIFE 50000H
DIM OPTIMAL INDOOR 220-240 V 50-60 Hz CE

1. PENDANT



IP40

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

POWER STANDARD

		843	1124	1405
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm
Opal	2700 K	635EH 112	635EJ 112	635EL 112
	3000 K	635EH 113	635EJ 113	635EL 113
	4000 K	635EH 115	635EJ 115	635EL 115
Microprismatic	2700 K	635EH 122	635EJ 122	635EL 122
	3000 K	635EH 123	635EJ 123	635EL 123
	4000 K	635EH 125	635EJ 125	635EL 125

POWER HIGH

		843	1124	1405
	500 mA	33 W 5058 - 5814 - 6258 lm	45 W 6744 - 7752 - 8344 lm	56 W 8430 - 9690 - 10430 lm
Opal	2700 K	635EH 312	635EJ 312	635EL 312
	3000 K	635EH 313	635EJ 313	635EL 313
	4000 K	635EH 315	635EJ 315	635EL 315
Microprismatic	2700 K	635EH 322	635EJ 322	635EL 322
	3000 K	635EH 323	635EJ 323	635EL 323
	4000 K	635EH 325	635EJ 325	635EL 325

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light

FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light

WAVE FAMILY

MEDITERRANEAN
Collection




Yonoh
Design by Yonoh
Diseño de Yonoh

- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

WAVE

NEW

1. PENDANT

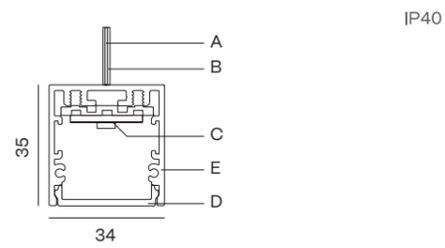

IP40



ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile

WAVE

POWER STANDARD

		1405	
	500 mA	28 W 4090 - 4845 - 5215 lm	
Opal	2700 K	665EL 112	
	3000 K	665EL 113	
	4000 K	665EL 115	
Microprismatic	2700 K	665EL 122	
	3000 K	665EL 123	
	4000 K	665EL 125	

POWER HIGH

		1405	
	500 mA	56 W 8430 - 9690 - 10430 lm	
Opal	2700 K	665EL 312	
	3000 K	665EL 313	
	4000 K	665EL 315	
Microprismatic	2700 K	665EL 322	
	3000 K	665EL 323	
	4000 K	665EL 325	

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light

FINISH

- B · Black
- W · White
- S · Special color

DIMM OPTIONS


- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light

WAVE SOFT

NEW

.01

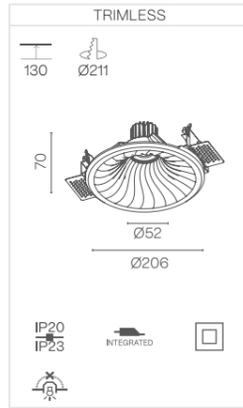



POWER STANDARD

		.01	
		BPM50	
		250 mA 8 W	1358 - 1380 - 1445 lm
40°	2700 K	664EB6W152 ✖	
	3000 K	664EB6W153 ✖	
	4000 K	664EB6W155 ✖	
60°	2700 K	664EB6W172 ✖	
	3000 K	664EB6W173 ✖	
	4000 K	664EB6W175 ✖	

POWER HIGH

		.01	
		BPM300	
		350 mA 12 W	1784 - 1820 - 1866 lm
40°	2700 K	664EB6W352 ✖	
	3000 K	664EB6W353 ✖	
	4000 K	664EB6W355 ✖	
60°	2700 K	664EB6W372 ✖	
	3000 K	664EB6W373 ✖	
	4000 K	664EB6W375 ✖	

Cut-away detail

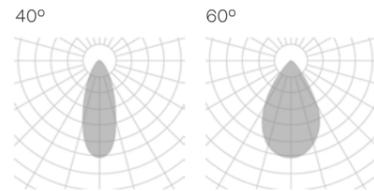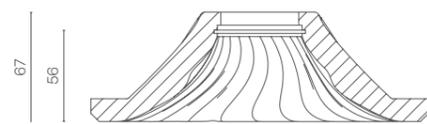

The data shown corresponds to raw values.

✖ DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

☑ Up-down light

LUMINAIRE INCLUDES
Recessed with frame mounting kit


📶 ON DEMAND OPTIONS

- 📶 Wireless control options
- 📶 Wall washer lens 15° beam angle

WAVE DOME

NEW

.01

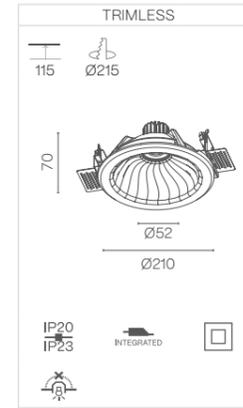



POWER STANDARD

		.01	
		BPM50	
		250 mA 8 W	1358 - 1380 - 1445 lm
40°	2700 K	663EB6W152 ✖	
	3000 K	663EB6W153 ✖	
	4000 K	663EB6W155 ✖	
60°	2700 K	663EB6W172 ✖	
	3000 K	663EB6W173 ✖	
	4000 K	663EB6W175 ✖	

POWER HIGH

		.01	
		BPM300	
		350 mA 12 W	1784 - 1820 - 1866 lm
40°	2700 K	663EB6W352 ✖	
	3000 K	663EB6W353 ✖	
	4000 K	663EB6W355 ✖	
60°	2700 K	663EB6W372 ✖	
	3000 K	663EB6W373 ✖	
	4000 K	663EB6W375 ✖	

Cut-away detail

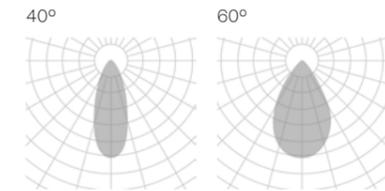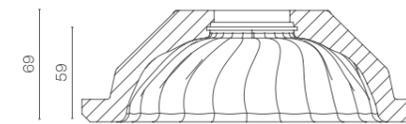

The data shown corresponds to raw values.

✖ DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

☑ Up-down light

LUMINAIRE INCLUDES
Recessed with frame mounting kit

📶 ON DEMAND OPTIONS

- 📶 Wireless control options
- 📶 Wall washer lens 15° beam angle

SAND FAMILY

MEDITE
RRANEAN
Collection




Yonoh
Design by Yonoh
Diseño de Yonoh

- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

SAND

NEW

.01

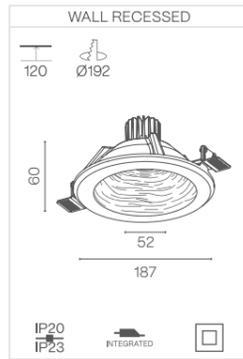

Cut-away detail



- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle


SAND

POWER STANDARD

		.01	
		250 mA 8 W 1358 - 1380 - 1445 lm	
40°	2700 K	645EB7W152 ✖	
	3000 K	645EB7W153 ✖	
	4000 K	645EB7W155 ✖	
60°	2700 K	645EB7W172 ✖	
	3000 K	645EB7W173 ✖	
	4000 K	645EB7W175 ✖	

POWER HIGH

		.01	
		350 mA 12 W 1784 - 1820 - 1866 lm	
40°	2700 K	645EB7W352 ✖	
	3000 K	645EB7W353 ✖	
	4000 K	645EB7W355 ✖	
60°	2700 K	645EB7W372 ✖	
	3000 K	645EB7W373 ✖	
	4000 K	645EB7W375 ✖	

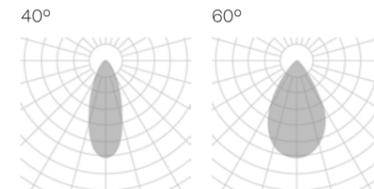

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling

- DIMM OPTIONS**
- On-Off
 - Dali
 - Push
 - 1.10v

Down light

LUMINAIRE INCLUDES
Recessed mounting kit

CRISMOSIL® SHAPED BY THE MEDITERRANEAN



MEDITERRANEAN COLECTION
NUVOL FAMILY | 468
WAVE FAMILY | 472
SAND FAMILY | 478



NUVOL, WAVE & SAND, designed by Yonoh, explore the expressive potential of Crismosil® through reliefs inspired by sea waves, sand and clouds, elements that reflect our Mediterranean essence.

Surfaces that convey movement, lightness and continuity. Matter is shaped through organic rhythms that interact with light, creating depth, nuance and a calm, immersive sensory experience.

These new forms translate the Mediterranean landscape into architecture, strengthening the connection between design, nature and space, while adding identity and warmth to every project.

Light shaped by the landscape.

NUVOL, WAVE & SAND, diseñadas por Yonoh, exploran el potencial expresivo de Crismosil® a través de relieves inspirados en las olas del mar, la arena y las nubes, elementos que reflejan nuestra esencia mediterránea.

Superficies que evocan movimiento, ligereza y continuidad. La materia se modela con ritmos orgánicos que interactúan con la luz, generando profundidad, matices y una experiencia sensorial serena y envolvente.

Estas nuevas formas trasladan el paisaje mediterráneo a la arquitectura, reforzando el vínculo entre diseño, naturaleza y espacio, y aportando identidad y calidez a cada proyecto.

Luz modelada por el paisaje.


MENORCA FAMILY



- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- TW
- IP20
- IP43
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE
- RoHS


MENORCA DEEP STRAIGHT

TRIMLESS

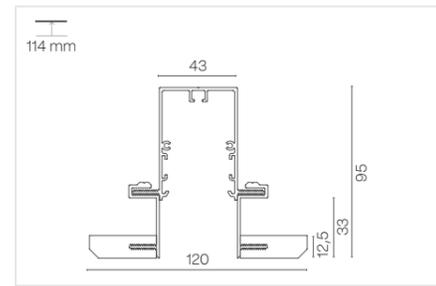


Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT

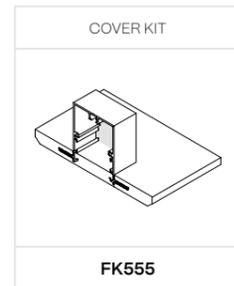

FK555

JOINTS

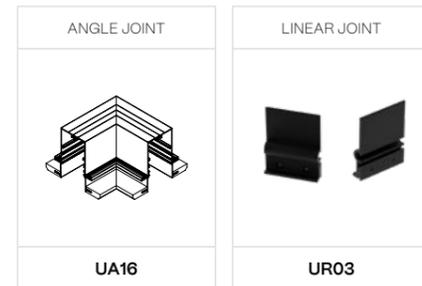

UA16


UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	625EH6W112	625EJ6W112	625EL6W112	625EN6W112	625EP6W112	625ER6W112
	3000 K	625EH6W113	625EJ6W113	625EL6W113	625EN6W113	625EP6W113	625ER6W113
	4000 K	625EH6W115	625EJ6W115	625EL6W115	625EN6W115	625EP6W 115	625ER6W115
Microprismatic	2700 K	625EH6W122	625EJ6W122	625EL6W122	625EN6W122	625EP6W122	625ER6W122
	3000 K	625EH6W123	625EJ6W123	625EL6W123	625EN6W123	625EP6W123	625ER6W123
	4000 K	625EH6W125	625EJ6W125	625EL6W125	625EN6W125	625EP6W125	625ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	625EH6W312	625EJ6W312	625EL6W312	625EN6W312	625EP6W312	625ER6W312
	3000 K	625EH6W313	625EJ6W313	625EL6W313	625EN6W313	625EP6W313	625ER6W313
	4000 K	625EH6W315	625EJ6W315	625EL6W315	625EN6W315	625EP6W315	625ER6W315
Microprismatic	2700 K	625EH6W322	625EJ6W322	625EL6W322	625EN6W322	625EP6W322	625ER6W322
	3000 K	625EH6W323	625EJ6W323	625EL6W323	625EN6W323	625EP6W323	625ER6W323
	4000 K	625EH6W325	625EJ6W325	625EL6W325	625EN6W325	625EP6W325	625ER6W325

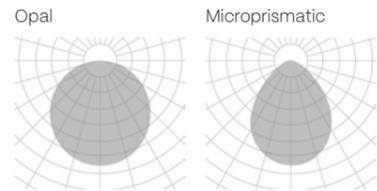

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80


DIMM OPTIONS

- On-Off
- Dali
- Push
- 1.10v

Down light

MENORCA DEEP TILT

TRIMLESS

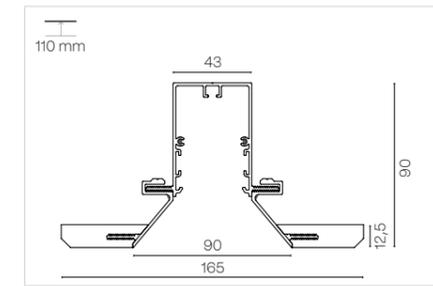

Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT



CK10

JOINTS



UA08


UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	626EH6W112	626EJ6W112	626EL6W112	626EN6W112	626EP6W112	626ER6W112
	3000 K	626EH6W113	626EJ6W113	626EL6W113	626EN6W113	626EP6W113	626ER6W113
	4000 K	626EH6W115	626EJ6W115	626EL6W115	626EN6W115	626EP6W 115	626ER6W115
Microprismatic	2700 K	626EH6W122	626EJ6W122	626EL6W122	626EN6W122	626EP6W122	626ER6W122
	3000 K	626EH6W123	626EJ6W123	626EL6W123	626EN6W123	626EP6W123	626ER6W123
	4000 K	626EH6W125	626EJ6W125	626EL6W125	626EN6W125	626EP6W125	626ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	626EH6W312	626EJ6W312	626EL6W312	626EN6W312	626EP6W312	626ER6W312
	3000 K	626EH6W313	626EJ6W313	626EL6W313	626EN6W313	626EP6W313	626ER6W313
	4000 K	626EH6W315	626EJ6W315	626EL6W315	626EN6W315	626EP6W315	626ER6W315
Microprismatic	2700 K	626EH6W322	626EJ6W322	626EL6W322	626EN6W322	626EP6W322	626ER6W322
	3000 K	626EH6W323	626EJ6W323	626EL6W323	626EN6W323	626EP6W323	626ER6W323
	4000 K	626EH6W325	626EJ6W325	626EL6W325	626EN6W325	626EP6W325	626ER6W325

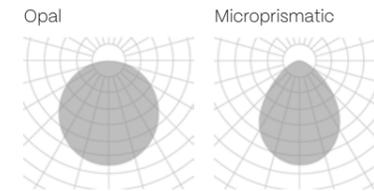

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80


DIMM OPTIONS

- On-Off
- Dali
- Push
- 1.10v

Down light


MENORCA DEEP WAVE

TRIMLESS

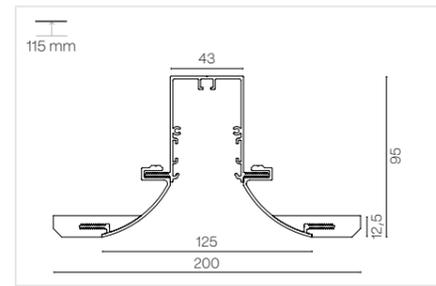

Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT

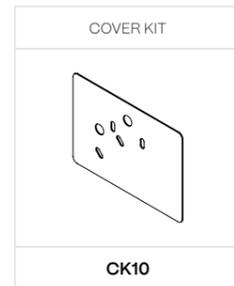

CK10

JOINTS



UA06


UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	627EH6W112	627EJ6W112	627EL6W112	627EN6W112	627EP6W112	627ER6W112
	3000 K	627EH6W113	627EJ6W113	627EL6W113	627EN6W113	627EP6W113	627ER6W113
	4000 K	627EH6W115	627EJ6W115	627EL6W115	627EN6W115	627EP6W 115	627ER6W115
Microprismatic	2700 K	627EH6W122	627EJ6W122	627EL6W122	627EN6W122	627EP6W122	627ER6W122
	3000 K	627EH6W123	627EJ6W123	627EL6W123	627EN6W123	627EP6W123	627ER6W123
	4000 K	627EH6W125	627EJ6W125	627EL6W125	627EN6W125	627EP6W125	627ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	627EH6W312	627EJ6W312	627EL6W312	627EN6W312	627EP6W312	627ER6W312
	3000 K	627EH6W313	627EJ6W313	627EL6W313	627EN6W313	627EP6W313	627ER6W313
	4000 K	627EH6W315	627EJ6W315	627EL6W315	627EN6W315	627EP6W315	627ER6W315
Microprismatic	2700 K	627EH6W322	627EJ6W322	627EL6W322	627EN6W322	627EP6W322	627ER6W322
	3000 K	627EH6W323	627EJ6W323	627EL6W323	627EN6W323	627EP6W323	627ER6W323
	4000 K	627EH6W325	627EJ6W325	627EL6W325	627EN6W325	627EP6W325	627ER6W325

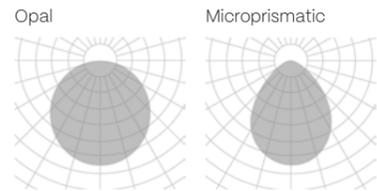

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light

MENORCA EDGE

TRIMLESS

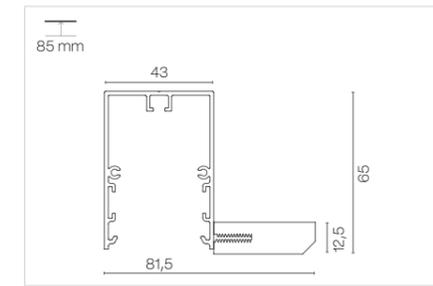


Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT



FK553

JOINTS

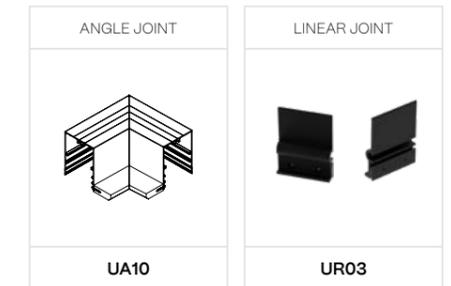

UA10


UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	628EH6W112	628EJ6W112	628EL6W112	628EN6W112	628EP6W112	628ER6W112
	3000 K	628EH6W113	628EJ6W113	628EL6W113	628EN6W113	628EP6W113	628ER6W113
	4000 K	628EH6W115	628EJ6W115	628EL6W115	628EN6W115	628EP6W 115	628ER6W115
Microprismatic	2700 K	628EH6W122	628EJ6W122	628EL6W122	628EN6W122	628EP6W122	628ER6W122
	3000 K	628EH6W123	628EJ6W123	628EL6W123	628EN6W123	628EP6W123	628ER6W123
	4000 K	628EH6W125	628EJ6W125	628EL6W125	628EN6W125	628EP6W125	628ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	628EH6W312	628EJ6W312	628EL6W312	628EN6W312	628EP6W312	628ER6W312
	3000 K	628EH6W313	628EJ6W313	628EL6W313	628EN6W313	628EP6W313	628ER6W313
	4000 K	628EH6W315	628EJ6W315	628EL6W315	628EN6W315	628EP6W315	628ER6W315
Microprismatic	2700 K	628EH6W322	628EJ6W322	628EL6W322	628EN6W322	628EP6W322	628ER6W322
	3000 K	628EH6W323	628EJ6W323	628EL6W323	628EN6W323	628EP6W323	628ER6W323
	4000 K	628EH6W325	628EJ6W325	628EL6W325	628EN6W325	628EP6W325	628ER6W325

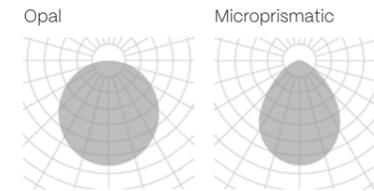

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light

MENORCA FLAT

TRIMLESS

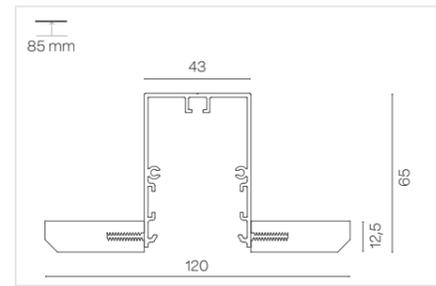

Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT



JOINTS




POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	629EH6W112	629EJ6W112	629EL6W112	629EN6W112	629EP6W112	629ER6W112
	3000 K	629EH6W113	629EJ6W113	629EL6W113	629EN6W113	629EP6W113	629ER6W113
	4000 K	629EH6W115	629EJ6W115	629EL6W115	629EN6W115	629EP6W 115	629ER6W115
Microprismatic	2700 K	629EH6W122	629EJ6W122	629EL6W122	629EN6W122	629EP6W122	629ER6W122
	3000 K	629EH6W123	629EJ6W123	629EL6W123	629EN6W123	629EP6W123	629ER6W123
	4000 K	629EH6W125	629EJ6W125	629EL6W125	629EN6W125	629EP6W125	629ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	629EH6W312	629EJ6W312	629EL6W312	629EN6W312	629EP6W312	629ER6W312
	3000 K	629EH6W313	629EJ6W313	629EL6W313	629EN6W313	629EP6W313	629ER6W313
	4000 K	629EH6W315	629EJ6W315	629EL6W315	629EN6W315	629EP6W315	629ER6W315
Microprismatic	2700 K	629EH6W322	629EJ6W322	629EL6W322	629EN6W322	629EP6W322	629ER6W322
	3000 K	629EH6W323	629EJ6W323	629EL6W323	629EN6W323	629EP6W323	629ER6W323
	4000 K	629EH6W325	629EJ6W325	629EL6W325	629EN6W325	629EP6W325	629ER6W325

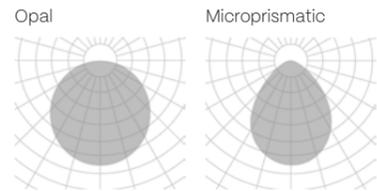

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light

MENORCA WHASER

TRIMLESS

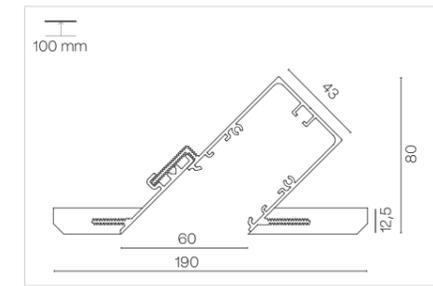

Total length = electrical system + 10mm + cover kit mm
 (Total length + 2 mm) x 65 mm

COVER KIT



JOINTS




POWER STANDARD

		843	1124	1405	1686	1967	2248
Opal	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	630EH6W112	630EJ6W112	630EL6W112	630EN6W112	630EP6W112	630ER6W112
	3000 K	630EH6W113	630EJ6W113	630EL6W113	630EN6W113	630EP6W113	630ER6W113
	4000 K	630EH6W115	630EJ6W115	630EL6W115	630EN6W115	630EP6W 115	630ER6W115
Microprismatic	2700 K	630EH6W122	630EJ6W122	630EL6W122	630EN6W122	630EP6W122	630ER6W122
	3000 K	630EH6W123	630EJ6W123	630EL6W123	630EN6W123	630EP6W123	630ER6W123
	4000 K	630EH6W125	630EJ6W125	630EL6W125	630EN6W125	630EP6W125	630ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
Opal	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	630EH6W312	630EJ6W312	630EL6W312	630EN6W312	630EP6W312	630ER6W312
	3000 K	630EH6W313	630EJ6W313	630EL6W313	630EN6W313	630EP6W313	630ER6W313
	4000 K	630EH6W315	630EJ6W315	630EL6W315	630EN6W315	630EP6W315	630ER6W315
Microprismatic	2700 K	630EH6W322	630EJ6W322	630EL6W322	630EN6W322	630EP6W322	630ER6W322
	3000 K	630EH6W323	630EJ6W323	630EL6W323	630EN6W323	630EP6W323	630ER6W323
	4000 K	630EH6W325	630EJ6W325	630EL6W325	630EN6W325	630EP6W325	630ER6W325

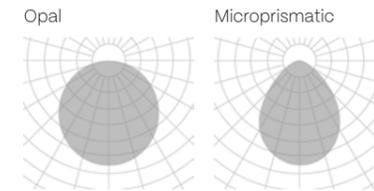

The MENORCA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options
- CRI 80

DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

Down light


ALBA PRO CRISMOSIL FAMILY

SOON




- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- TW
- ⚡
- ⊕
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE
- ⚡

SOON

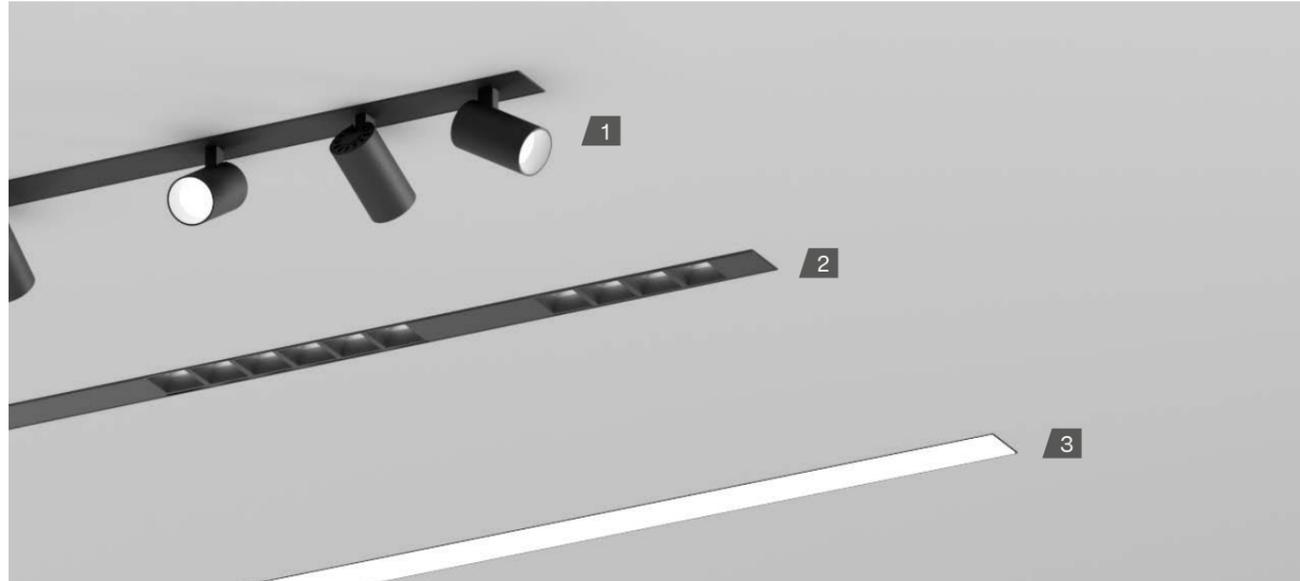


1. SPOTLIGHT

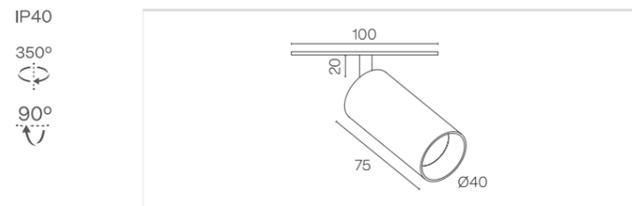


		POWER STANDARD		POWER HIGH	
IP40	700 mA	6 W	878 - 889 - 930 lm	6 W	886 - 898 - 939 lm
15°	2700 K	260EX9	122X	260EX9	322X
	3000 K	260EX9	123X	260EX9	323X
	4000 K	260EX9	125X	260EX9	325X
24°	2700 K	260EX9	132X	260EX9	332X
	3000 K	260EX9	133X	260EX9	333X
	4000 K	260EX9	135X	260EX9	335X
38°	2700 K	260EX9	152X	260EX9	352X
	3000 K	260EX9	153X	260EX9	353X
	4000 K	260EX9	155X	260EX9	355X

1. SPOTLIGHT STICK

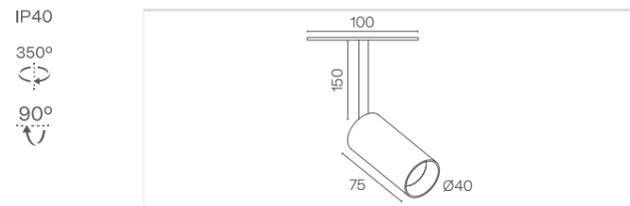

		POWER STANDARD		POWER HIGH	
IP40	700 mA	6 W	878 - 889 - 930 lm	6 W	886 - 898 - 939 lm
15°	2700 K	261EX9	122X	261EX9	322X
	3000 K	261EX9	123X	261EX9	323X
	4000 K	261EX9	125X	261EX9	325X
24°	2700 K	261EX9	132X	261EX9	332X
	3000 K	261EX9	133X	261EX9	333X
	4000 K	261EX9	135X	261EX9	335X
38°	2700 K	261EX9	152X	261EX9	352X
	3000 K	261EX9	153X	261EX9	353X
	4000 K	261EX9	155X	261EX9	355X

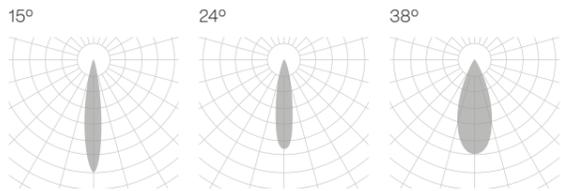

The data shown corresponds to raw values.

- Down light
- FINISH**
 - B · Black
 - W · White

2. MODULE LENSES - POWER STANDARD

IP40

Dimension	29 mm	80 mm	
350 mA	4 W 575 - 600 - 625 lm	7 W 1000 - 1050 - 1055 lm	
65°	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
90°	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
Asymmetric	2700 K	257EX9 142X	258EX9 142X
	3000 K	257EX9 143X	258EX9 143X
	4000 K	257EX9 155X	258EX9 155X

2. MODULE LENSES - POWER HIGH

IP40

Dimension	29 mm	80 mm	
700 mA	8 W 1115 - 1165 - 1220 lm	14 W 1950 - 2040 - 2050 lm	
65°	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
90°	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
Asymmetric	2700 K	257EX9 342X	258EX9 342X
	3000 K	257EX9 343X	258EX9 343X
	4000 K	257EX9 355X	258EX9 355X

3. MODULE LIGHT - POWER STANDARD


IP40

	Opal	Microprismatic	
Dimension	280 mm	280 mm	
700 mA	8 W 1178 - 1388 - 1493 lm	8 W 1178 - 1388 - 1493 lm	
Power standard	2700 K	259EX9W112X	259EX9W122X
	3000 K	259EX9W113X	259EX9W123X
	4000 K	259EX9W115X	259EX9W125X

3. MODULE LIGHT - POWER HIGH

IP40

	Opal	Microprismatic	
Dimension	280 mm	280 mm	
700 mA	16 W 2213 - 2664 - 2866 lm	16 W 2213 - 2664 - 2866 lm	
Power high	2700 K	259EX9W312X	259EX9W322X
	3000 K	259EX9W313X	259EX9W323X
	4000 K	259EX9W315X	259EX9W325X

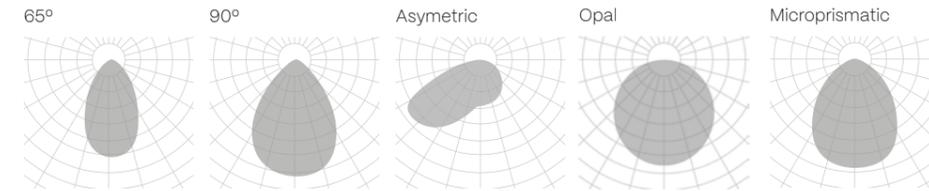


The data shown corresponds to raw values.

- Down light
- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v


PROFILES for modules

TRIMLESS

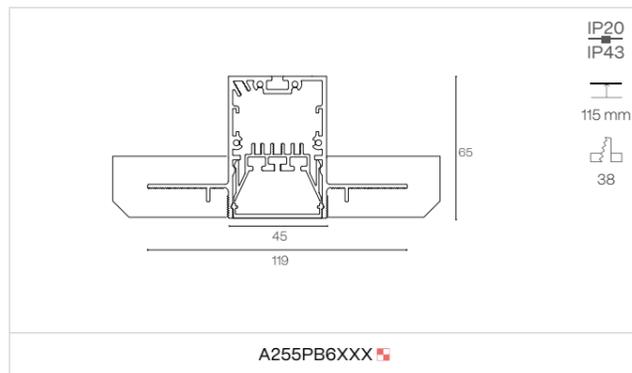

Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 2 mm (Cover Kit)
 (Total length + 2 mm) x 65 mm

GENERAL COMPONENTS

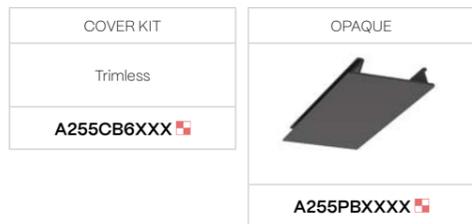

ALBA DRIVER FOR CUSTOM PRODUCT - POWER STANDARD			
Electric system Length 281 mm	1 MODULE	4 W	DR10163.01.ST. ✖
Electric system Length 562 mm	2 - 4 MODULES	8 to 16 W	DR10163.02.ST. ✖
Electric system Length 843 mm	5 - 9 MODULES	20 to 36 W	DR10163.03.ST. ✖
Electric system Length 1124 mm	10 - 17 MODULES	40 to 68 W	DR10163.04.ST. ✖
Electric system Length 1405 mm	18 - 19 MODULES	72 to 76 W	DR10163.05.ST. ✖

ALBA DRIVER FOR CUSTOM PRODUCT - POWER HIGH			
Electric system Length 281 mm	1 MODULE	8 W	DR10163.01.HI. ✖
Electric system Length 562 mm	2 - 4 MODULES	16 W	DR10163.02.HI. ✖
Electric system Length 843 mm	5 - 9 MODULES	24 to 32 W	DR10163.03.HI. ✖
Electric system Length 1124 mm	10 - 17 MODULES	40 to 64 W	DR10163.04.HI. ✖
Electric system Length 1405 mm	18 - 19 MODULES	72 to 88 W	DR10163.05.HI. ✖

ON DEMAND OPTIONS

- Special finishes
- Special color temperatures
- Custom dimensions
- CRI 80
- Emergency lighting
- Motion detection
- Wireless control options
- RGB

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

CLOSED LUMINAIRE

POWER STANDARD – Closed luminaire

		843	1124	1405
24 V	4 W	387 - 405 - 425 lm	622 - 634 - 666 lm	824 - 840 - 882 lm
	500 mA	17 W	22 W	28 W
Opal	2700 K	255EH ✖ 112 ✖	255EJ ✖ 112 ✖	255EL ✖ 112 ✖
	3000 K	255EH ✖ 113 ✖	255EJ ✖ 113 ✖	255EL ✖ 113 ✖
	4000 K	255EH ✖ 115 ✖	255EJ ✖ 115 ✖	255EL ✖ 115 ✖
Microprismatic	2700 K	255EH ✖ 122 ✖	255EJ ✖ 122 ✖	255EL ✖ 122 ✖
	3000 K	255EH ✖ 123 ✖	255EJ ✖ 123 ✖	255EL ✖ 123 ✖
	4000 K	255EH ✖ 125 ✖	255EJ ✖ 125 ✖	255EL ✖ 125 ✖

POWER HIGH – Closed luminaire

		843	1124	1405
24 V	4 W	387 - 405 - 425 lm	622 - 634 - 666 lm	824 - 840 - 882 lm
	500 mA	17 W	22 W	28 W
Opal	2700 K	255EH ✖ 312 ✖	255EJ ✖ 312 ✖	255EL ✖ 312 ✖
	3000 K	255EH ✖ 313 ✖	255EJ ✖ 313 ✖	255EL ✖ 313 ✖
	4000 K	255EH ✖ 315 ✖	255EJ ✖ 315 ✖	255EL ✖ 315 ✖
Microprismatic	2700 K	255EH ✖ 322 ✖	255EJ ✖ 322 ✖	255EL ✖ 322 ✖
	3000 K	255EH ✖ 323 ✖	255EJ ✖ 323 ✖	255EL ✖ 323 ✖
	4000 K	255EH ✖ 325 ✖	255EJ ✖ 325 ✖	255EL ✖ 325 ✖

The ALBA family is available in multiple sizes. This page shows a selection of them. For other sizes and technical specifications, see page 194.


Closed luminaire with 4 opaques and 3 lens modules

		POWER STANDARD	POWER HIGH
1100 mm - 1098 mm (TR)			
24 V	8 W	622 - 634 - 666 lm	1007 - 1069 - 1131 lm
	500 mA	12 W	24 W
65°	2700 K	256EW ✖ 172 ✖	256EW ✖ 372 ✖
	3000 K	256EW ✖ 173 ✖	256EW ✖ 373 ✖
	4000 K	256EW ✖ 175 ✖	256EW ✖ 375 ✖



Closed luminaire with 5 opaques and 4 lens modules

		POWER STANDARD	POWER HIGH
1465 mm - 1475 mm (RF) - 1463 mm (TR)			
24 V	12 W	824 - 840 - 882 lm	1334 - 1417 - 1500 lm
	500 mA	16 W	32 W
65°	2700 K	256EX ✖ 172 ✖	256EX ✖ 372 ✖
	3000 K	256EX ✖ 173 ✖	256EX ✖ 373 ✖
	4000 K	256EX ✖ 175 ✖	256EX ✖ 375 ✖

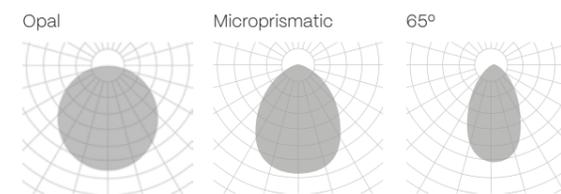

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 7 · Wall surface
- 8 · Track


FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

ZENIT FAMILY

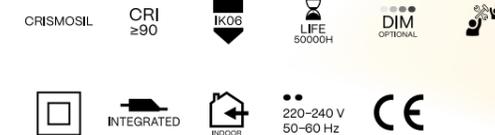


ZENIT

ZENIT RING

NEW

.00

NEW

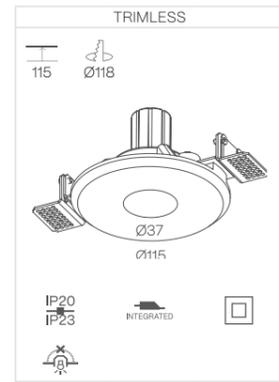


POWER STANDARD

		.00	.01
		BPM30	BPM50
		350 mA 3 W 489 - 496 - 518 lm	250 mA 8 W 1358 - 1380 - 1445 lm
24°	2700 K	670EA6W132 ✖	-
	3000 K	670EA6W133 ✖	-
	4000 K	670EA6W135 ✖	-
40°	2700 K	670EA6W152 ✖	670EB6W152 ✖
	3000 K	670EA6W153 ✖	670EB6W153 ✖
	4000 K	670EA6W155 ✖	670EB6W155 ✖
60°	2700 K	670EA6W172 ✖	670EB6W172 ✖
	3000 K	670EA6W173 ✖	670EB6W173 ✖
	4000 K	670EA6W175 ✖	670EB6W175 ✖

POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
-		670EB6W400X

Cut-away detail

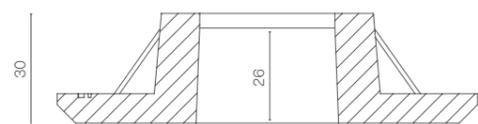


The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

.01

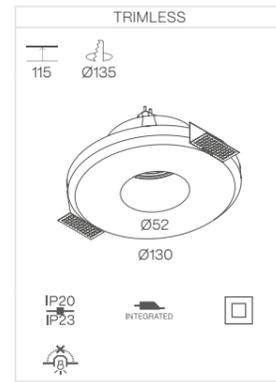


POWER HIGH

		.01
		BPM300
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	670EB6W352 ✖
	3000 K	670EB6W353 ✖
	4000 K	670EB6W355 ✖
60°	2700 K	670EB6W372 ✖
	3000 K	670EB6W373 ✖
	4000 K	670EB6W375 ✖

POWER GU10


		.01
		GU10
		Max. 8 W LED
.GU		670EB6W500X

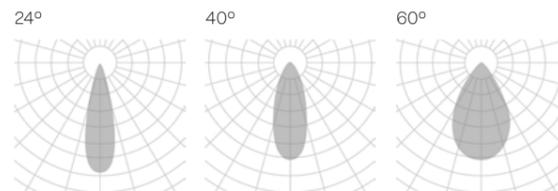

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens
15° beam angle


.01

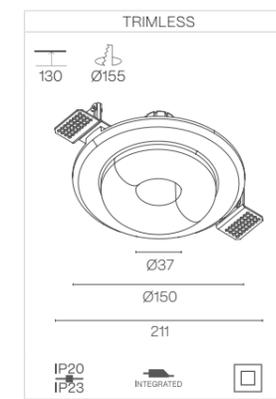

POWER STANDARD

		.00
		BPM30
		350 mA 3 W 489 - 496 - 518 lm
24°	2700 K	600EA6W132 ✖
	3000 K	600EA6W133 ✖
	4000 K	600EA6W135 ✖
40°	2700 K	600EA6W152 ✖
	3000 K	600EA6W153 ✖
	4000 K	600EA6W155 ✖
60°	2700 K	600EA6W172 ✖
	3000 K	600EA6W173 ✖
	4000 K	600EA6W175 ✖


Cut-away detail

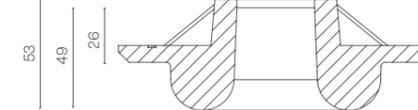

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

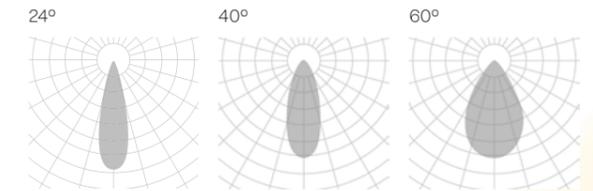


- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm


- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens
15° beam angle

ZENIT DEEP

.00

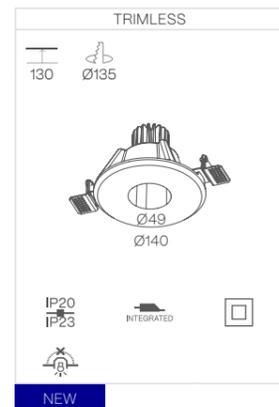

.01

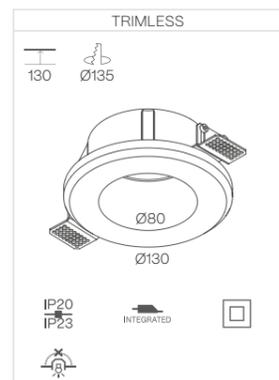

Cut-away detail



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- DIMM OPTIONS**
 - On-Off
 - Dali
 - Push
 - 1.10v
- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm
- ON DEMAND OPTIONS**
 - Wireless control options
 - Wall washer lens
15° beam angle

ZENIT DEEP

POWER STANDARD

		.00	.01
		250 mA 8 W 1358 - 1380 - 1445 lm	250 mA 8 W 1358 - 1380 - 1445 lm
	2700 K	671EA6W152	671EB6W152
	3000 K	671EA6W153	671EB6W153
	4000 K	671EA6W155	671EB6W155
	2700 K	671EA6W172	671EB6W172
	3000 K	671EA6W173	671EB6W173
	4000 K	671EA6W175	671EB6W175

POWER HIGH


		.00	.01
		350 mA 12 W 1784 - 1820 - 1866 lm	350 mA 12 W 1784 - 1820 - 1866 lm
	2700 K	671EA6W352	671EB6W352
	3000 K	671EA6W353	671EB6W353
	4000 K	671EA6W355	671EB6W355
	2700 K	671EA6W372	671EB6W372
	3000 K	671EA6W373	671EB6W373
	4000 K	671EA6W375	671EB6W375

POWER GU5.3

		.01
		Max. 8 W LED
-		671EB6W400X

POWER GU10

		.01
		Max. 8 W LED
.GU		671EB6W500X

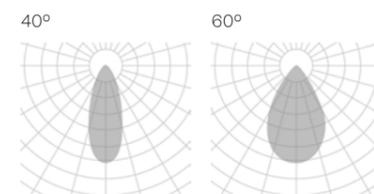


The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- DIMM OPTIONS**
 - On-Off
 - Dali
 - Push
 - 1.10v
- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

ZENIT DEEP TWINS

.01

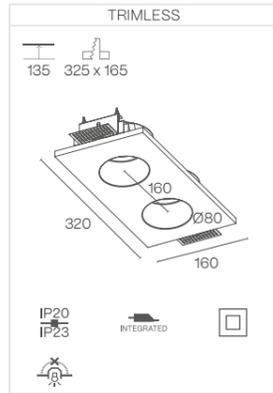

POWER STANDARD

		.01
		BPM50
		250 mA 32 W 2716 - 2760 - 2890 lm
40°	2700 K	673EB6W152 ✖
	3000 K	673EB6W153 ✖
	4000 K	673EB6W155 ✖
60°	2700 K	673EB6W172 ✖
	3000 K	673EB6W173 ✖
	4000 K	673EB6W175 ✖

POWER HIGH

		.01
		BPM300
		350 mA 48 W 3568 - 3640 - 3732 lm
40°	2700 K	673EB6W352 ✖
	3000 K	673EB6W353 ✖
	4000 K	673EB6W355 ✖
60°	2700 K	673EB6W372 ✖
	3000 K	673EB6W373 ✖
	4000 K	673EB6W375 ✖


POWER GU5.3

		.01
		GU5.3
		Max. 2 x 8 W LED
		673EB6W400X

POWER GU10

		.01
		GU10
		Max. 2 x 8 W LED
.GU	673EB6W500X	

Cut-away detail

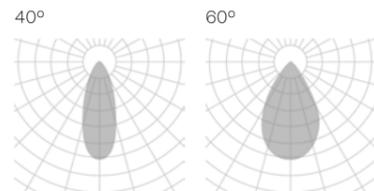

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT MOVE

.01

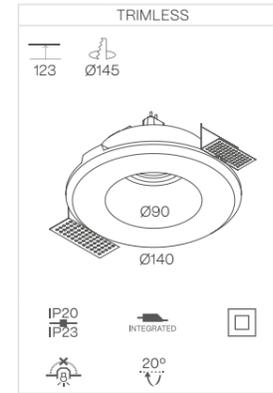

POWER STANDARD

		.01
		BPM50
		250 mA 8 W 1358 - 1380 - 1445 lm
40°	2700 K	674EB6W152 ✖
	3000 K	674EB6W153 ✖
	4000 K	674EB6W155 ✖
60°	2700 K	674EB6W172 ✖
	3000 K	674EB6W173 ✖
	4000 K	674EB6W175 ✖



POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
		674EB6W400X

POWER GU10

		.01
		GU10
		Max. 8 W LED
.GU	674EB6W500X	

Cut-away detail

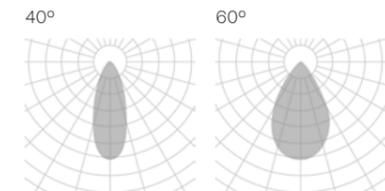

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT MOVE SQ

.01

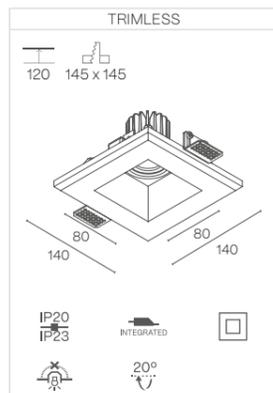

POWER STANDARD

		.01	
		BPM50	
		250 mA	8 W
		1358 - 1380 - 1445 lm	
40°	2700 K	675EB6W152 ✖	
	3000 K	675EB6W153 ✖	
	4000 K	675EB6W155 ✖	
60°	2700 K	675EB6W172 ✖	
	3000 K	675EB6W173 ✖	
	4000 K	675EB6W175 ✖	

POWER GU5.3

		.01	
		GU5.3	
		Max. 8 W LED	
		675EB6W400X	

Cut-away detail



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT ORTO

.01

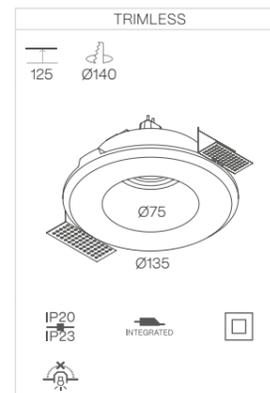

POWER STANDARD

		.01	
		BPM50	
		250 mA	8 W
		1358 - 1380 - 1445 lm	
40°	2700 K	676EB6W152 ✖	
	3000 K	676EB6W153 ✖	
	4000 K	676EB6W155 ✖	
60°	2700 K	676EB6W172 ✖	
	3000 K	676EB6W173 ✖	
	4000 K	676EB6W175 ✖	

POWER GU5.3

		.01	
		GU5.3	
		Max. 8 W LED	
		676EB6W400X	

Cut-away detail



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm


- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT SIDEREA

.00

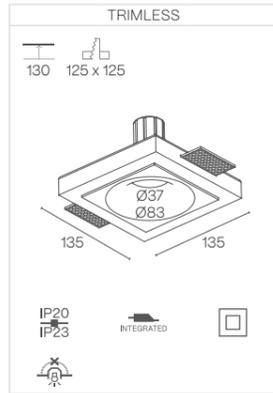

.01

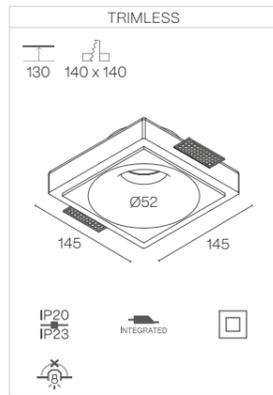

Cut-away detail



- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

CEILING THICKNESS
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT SIDEREA

POWER STANDARD

		.00	.01
		350 mA 3 W 489 - 496 - 518 lm	250 mA 8 W 1358 - 1380 - 1445 lm
24°	2700 K	677EA6W132 ✖	-
	3000 K	677EA6W133 ✖	-
	4000 K	677EA6W135 ✖	-
40°	2700 K	677EA6W152 ✖	677EB6W152 ✖
	3000 K	677EA6W153 ✖	677EB6W153 ✖
	4000 K	677EA6W155 ✖	677EB6W155 ✖
60°	2700 K	677EA6W172 ✖	677EB6W172 ✖
	3000 K	677EA6W173 ✖	677EB6W173 ✖
	4000 K	677EA6W175 ✖	677EB6W175 ✖

POWER HIGH


		.01
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	677EB6W352 ✖
	3000 K	677EB6W353 ✖
	4000 K	677EB6W355 ✖
60°	2700 K	677EB6W372 ✖
	3000 K	677EB6W373 ✖
	4000 K	677EB6W375 ✖

POWER GU5.3

		.01
		Max. 8 W LED
-		677EB6W400X

POWER GU10

		.01
		Max. 8 W LED
.GU		677EB6W500X

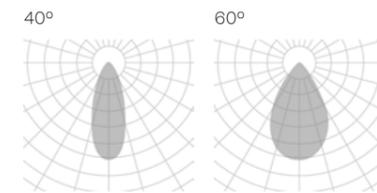


The data shown corresponds to raw values.

- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

Down light


ZENIT SIDEREA ASYMETRIC

.01

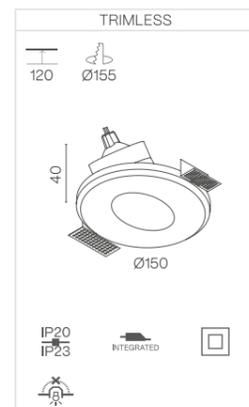


CEILING THICKNESS
7-22 mm

.02


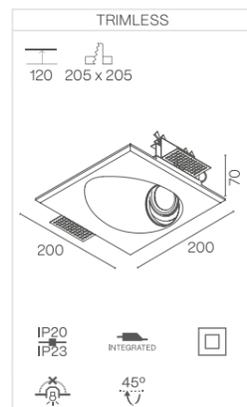


CEILING THICKNESS
10-20 mm

.03

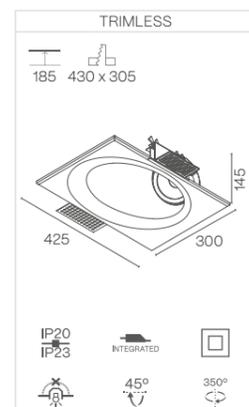

CEILING THICKNESS
10-20 mm

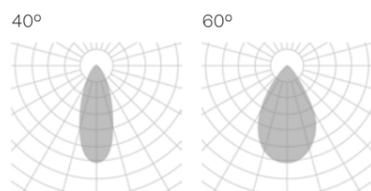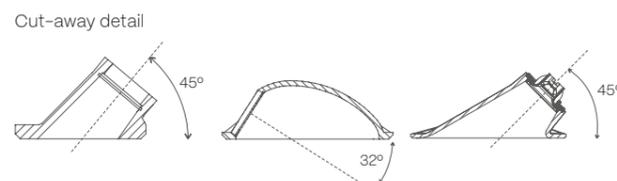

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

ZENIT SIDEREA ASYMETRIC

POWER STANDARD

		.01	.02	.03
		250 mA 8 W 1358 - 1380 - 1445 lm	250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	650EB6W152 ✖	650EE6W152 ✖	650EH6W152 ✖
	3000 K	650EB6W153 ✖	650EE6W153 ✖	650EH6W153 ✖
	4000 K	650EB6W155 ✖	650EE6W155 ✖	650EH6W155 ✖
60°	2700 K	650EB6W172 ✖	650EE6W172 ✖	650EH6W172 ✖
	3000 K	650EB6W173 ✖	650EE6W173 ✖	650EH6W173 ✖
	4000 K	650EB6W175 ✖	650EE6W175 ✖	650EH6W175 ✖

POWER GU5.3

		.01	.02	.03
		Max. 8 W LED	Max. 8 W LED	Max. 20 W LED
		650EB6W400X	650EE6W400X	650EH6W400X

POWER GU10

		.01	.02	.03
		Max. 8 W LED	Max. 8 W LED	Max. 20 W LED
.GU		650EB6W500X	650EE6W500X	650EH6W500X

POWER GU8.5

		.03
		Max. 20 W LED
.CD		650EH6W600X

The data shown corresponds to raw values.


DIMM OPTIONS

- On-Off
- Dali
- Push
- 1.10v

Down light

ZENIT SQ

.01

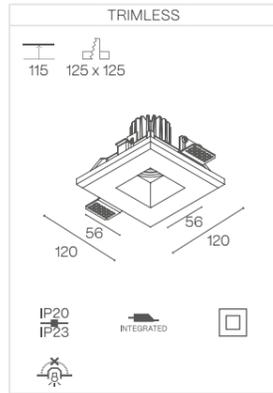

POWER STANDARD

		.01	
		BPM50	
		250 mA 8 W	1358 - 1380 - 1445 lm
40°	2700 K	678EB6W152 ✖	
	3000 K	678EB6W153 ✖	
	4000 K	678EB6W155 ✖	
60°	2700 K	678EB6W172 ✖	
	3000 K	678EB6W173 ✖	
	4000 K	678EB6W175 ✖	

POWER HIGH

		.01	
		BPM300	
		350 mA 12 W	1784 - 1820 - 1866 lm
40°	2700 K	678EB6W352 ✖	
	3000 K	678EB6W353 ✖	
	4000 K	678EB6W355 ✖	
60°	2700 K	678EB6W372 ✖	
	3000 K	678EB6W373 ✖	
	4000 K	678EB6W375 ✖	



POWER GU5.3

		.01	
		GU5.3	
		Max. 8 W LED	
-		678EB6W400X	

POWER GU10

		.01	
		GU10	
		Max. 8 W LED	
.GU		678EB6W500X	

Cut-away detail

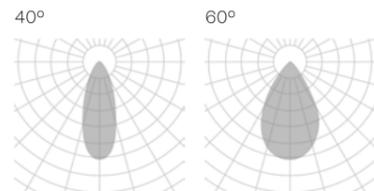

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v


- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT STONE

NEW

.00

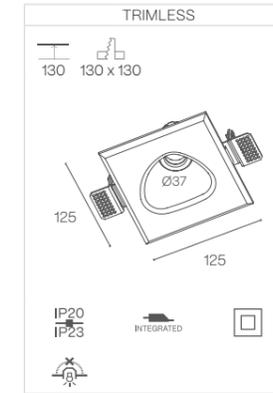

POWER STANDARD

		.00		.01	
		BPM30		BPM50	
		350 mA 3 W	489 - 496 - 518 lm	250 mA 8 W	1358 - 1380 - 1445 lm
24°	2700 K	679EA6W132 ✖		-	
	3000 K	679EA6W133 ✖		-	
	4000 K	679EA6W135 ✖		-	
40°	2700 K	679EA6W152 ✖		679EB6W152 ✖	
	3000 K	679EA6W153 ✖		679EB6W153 ✖	
	4000 K	679EA6W155 ✖		679EB6W155 ✖	
60°	2700 K	679EA6W172 ✖		679EB6W172 ✖	
	3000 K	679EA6W173 ✖		679EB6W173 ✖	
	4000 K	679EA6W175 ✖		679EB6W175 ✖	

POWER GU5.3

		.01	
		GU5.3	
		Max. 8 W LED	
-		679EB6W400X	

Cut-away detail



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT ZUBIA

.01

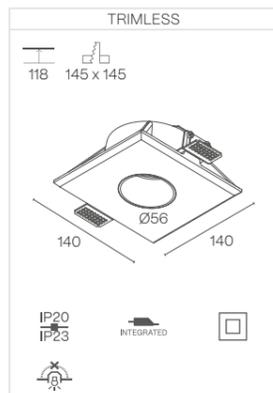

POWER STANDARD

		.01	
		BPM50	
		250 mA	8 W
		1358 - 1380 - 1445 lm	
40°	2700 K	680EB6W152 ✖	
	3000 K	680EB6W153 ✖	
	4000 K	680EB6W155 ✖	
60°	2700 K	680EB6W172 ✖	
	3000 K	680EB6W173 ✖	
	4000 K	680EB6W175 ✖	

POWER HIGH


		.01	
		BPM300	
		350 mA	12 W
		1784 - 1820 - 1866 lm	
40°	2700 K	680EB6W352 ✖	
	3000 K	680EB6W353 ✖	
	4000 K	680EB6W355 ✖	
60°	2700 K	680EB6W372 ✖	
	3000 K	680EB6W373 ✖	
	4000 K	680EB6W375 ✖	

POWER GU5.3


		.01	
		GU5.3	
		Max. 8 W LED	
		680EB6W400X	

POWER GU10

		.01	
		GU10	
		Max. 8 W LED	
.GU		680EB6W500X	

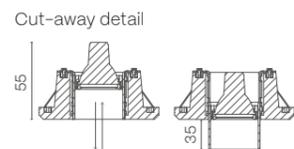

It can be mounted in any position from recessed up to 35mm protruding.

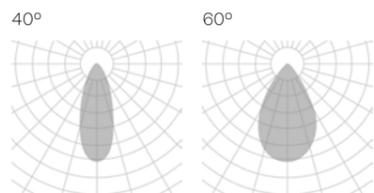

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens
- 15° beam angle

ZENIT ZUBIA SQ

.01

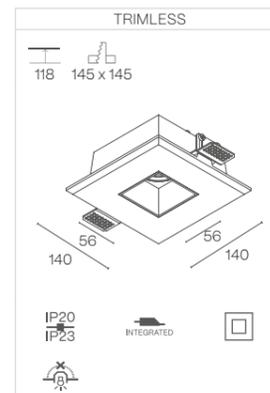

POWER STANDARD

		.01	
		BPM50	
		250 mA	8 W
		1358 - 1380 - 1445 lm	
40°	2700 K	681EB6W152 ✖	
	3000 K	681EB6W153 ✖	
	4000 K	681EB6W155 ✖	
60°	2700 K	681EB6W172 ✖	
	3000 K	681EB6W173 ✖	
	4000 K	681EB6W175 ✖	

POWER HIGH


		.01	
		BPM300	
		350 mA	12 W
		1784 - 1820 - 1866 lm	
40°	2700 K	681EB6W352 ✖	
	3000 K	681EB6W353 ✖	
	4000 K	681EB6W355 ✖	
60°	2700 K	681EB6W372 ✖	
	3000 K	681EB6W373 ✖	
	4000 K	681EB6W375 ✖	

POWER GU5.3


		.01	
		GU5.3	
		Max. 8 W LED	
		680EB6W400X	

POWER GU10

		.01	
		GU10	
		Max. 8 W LED	
.GU		680EB6W500X	

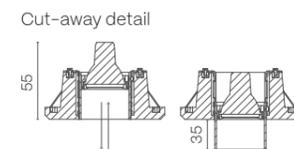

It can be mounted in any position from recessed up to 35mm protruding.

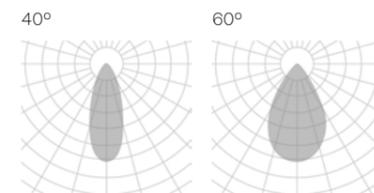

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens
- 15° beam angle




VEGA FAMILY




CRISMOSIL CRI ≥90 IK06 LIFE 50000H DIM OPTIONAL 
 INTEGRATED  INDOOR 220-240 V 50-60 Hz CE

VEGA

.01

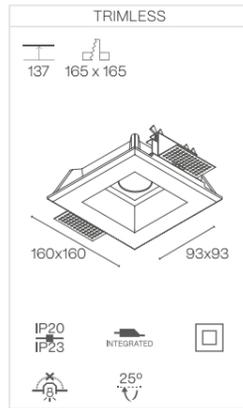

.02

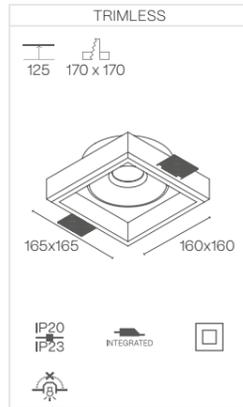

↑ CEILING THICKNESS
10-20 mm

↑ CEILING THICKNESS
13 mm

Cut-away detail



- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

VEGA

POWER STANDARD

		.01	.02
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	654EB6W152 ✖	654EE6W152 ✖
	3000 K	654EB6W153 ✖	654EE6W153 ✖
	4000 K	654EB6W155 ✖	654EE6W155 ✖
60°	2700 K	654EB6W172 ✖	654EE6W172 ✖
	3000 K	654EB6W173 ✖	654EE6W173 ✖
	4000 K	654EB6W175 ✖	654EE6W175 ✖

POWER HIGH

		.01
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	654EB6W352 ✖
	3000 K	654EB6W353 ✖
	4000 K	654EB6W355 ✖
60°	2700 K	654EB6W372 ✖
	3000 K	654EB6W373 ✖
	4000 K	654EB6W375 ✖

POWER GU5.3


		.01	.02
		Max. 8 W LED	Max. 8 W LED
-		654EB6W400X	654EE6W400X

POWER GU10

		.01	.02
		Max. 8 W LED	Max. 8 W LED
.GU		654EB6W500X	654EE6W500X

POWER GX8.5

		.02
		Max. 20 W LED
.CD		654EH6W600X

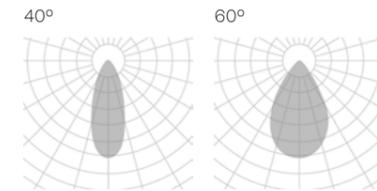


The data shown corresponds to raw values.

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Down light


VEGA ADHARA

.01

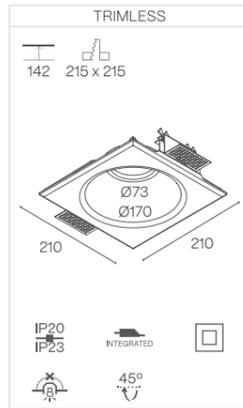


↑ ↓ **CEILING THICKNESS**
10-20 mm

.02

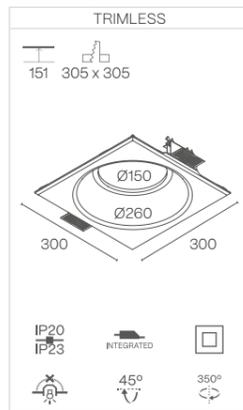

↑ ↓ **CEILING THICKNESS**
13 mm

Cut-away detail

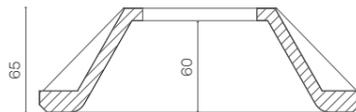

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

VEGA ADHARA

POWER STANDARD

		.01	.02
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	655EB6W152 ✖	655EE6W152 ✖
	3000 K	655EB6W153 ✖	655EE6W153 ✖
	4000 K	655EB6W155 ✖	655EE6W155 ✖
60°	2700 K	655EB6W172 ✖	655EE6W172 ✖
	3000 K	655EB6W173 ✖	655EE6W173 ✖
	4000 K	655EB6W175 ✖	655EE6W175 ✖

POWER HIGH

		.01
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	655EB6W352 ✖
	3000 K	655EB6W353 ✖
	4000 K	655EB6W355 ✖
60°	2700 K	655EB6W372 ✖
	3000 K	655EB6W373 ✖
	4000 K	655EB6W375 ✖

POWER GU5.3


		.01	.02
		Max. 8 W LED	Max. 8 W LED
-		655EB6W400X	655EE6W400X

POWER GU10

		.01	.02
		Max. 8 W LED	Max. 8 W LED
.GU		655EB6W500X	655EE6W500X

POWER GX8.5

		.02
		Max. 20 W LED
.CD		655EH6W600X

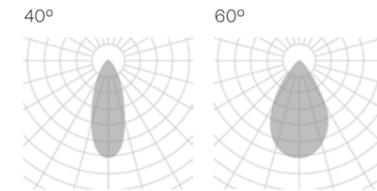


The data shown corresponds to raw values.

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Down light

VEGA TWINS

.01

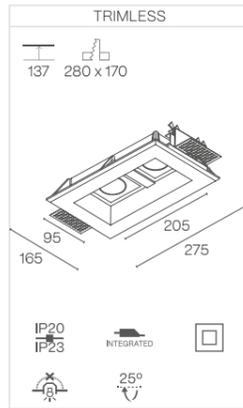



.02

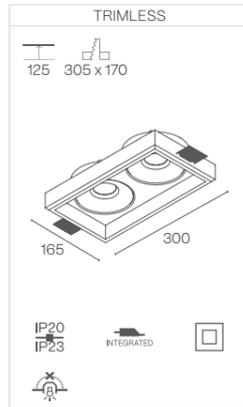

↑ CEILING THICKNESS
10-20 mm

↑ CEILING THICKNESS
13 mm

Cut-away detail



- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

VEGA TWINS

POWER STANDARD

		.01	.02
		250 mA 32 W 2716 - 2760 - 2890 lm	500 mA 72 W 2710 - 3076 - 3444 lm
40°	2700 K	656EB6W152 ✖	656EE6W152 ✖
	3000 K	656EB6W153 ✖	656EE6W153 ✖
	4000 K	656EB6W155 ✖	656EE6W155 ✖
60°	2700 K	656EB6W172 ✖	656EE6W172 ✖
	3000 K	656EB6W173 ✖	656EE6W173 ✖
	4000 K	656EB6W175 ✖	656EE6W175 ✖

POWER HIGH

		.01
		350 mA 48 W 3568 - 3640 - 3732 lm
40°	2700 K	656EB6W352 ✖
	3000 K	656EB6W353 ✖
	4000 K	656EB6W355 ✖
60°	2700 K	656EB6W372 ✖
	3000 K	656EB6W373 ✖
	4000 K	656EB6W375 ✖

POWER GU5.3


		.01	.02
		Max. 2 × 8 W LED	Max. 2 × 20 W LED
		656EB6W400X	656EE6W400X

POWER GU10

		.01	.02
		Max. 2 × 8 W LED	Max. 2 × 20 W LED
.GU		656EB6W500X	656EE6W500X

POWER GX8.5

		.02
		Max. 2 × 20 W LED
.CD		656EH6W600X

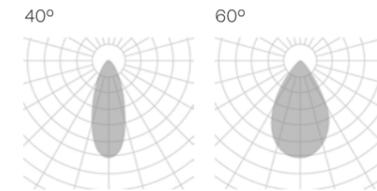


The data shown corresponds to raw values.

- DIMM OPTIONS**
- On-Off
- Dali
- Push
- 1.10v


Down light

VEGA ZETA

.01

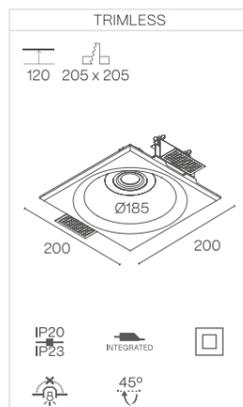

CEILING THICKNESS
10-20 mm

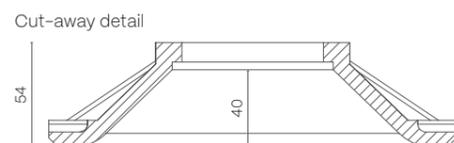

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

VEGA ZETA

POWER STANDARD

		.01	
		250 mA 8 W 1358 - 1380 - 1445 lm	
40°	2700 K	657EB6W152	
	3000 K	657EB6W153	
	4000 K	657EB6W155	
60°	2700 K	657EB6W172	
	3000 K	657EB6W173	
	4000 K	657EB6W175	

POWER GU5.3


		.01	
		Max. 20 W LED	
-		657EB6W400X	

POWER HIGH

		.01	
		350 mA 12 W 1784 - 1820 - 1866 lm	
40°	2700 K	657EB6W352	
	3000 K	657EB6W353	
	4000 K	657EB6W355	
60°	2700 K	657EB6W372	
	3000 K	657EB6W373	
	4000 K	657EB6W375	

POWER GU10

		.01	
		Max. 20 W LED	
.GU		657EB6W500X	

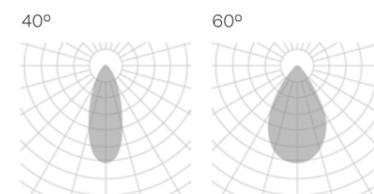

The data shown corresponds to raw values.

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Down light

ESPIGA FAMILY




CRISMOSIL CRI ≥90 IK08 LIFE 50000H DIM OPTIONAL

INTEGRATED INDOOR 220-240 V 50-60 Hz CE


ESPIGA SOFT

.01

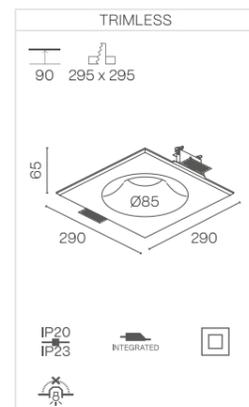


CEILING THICKNESS
10-20 mm

.02

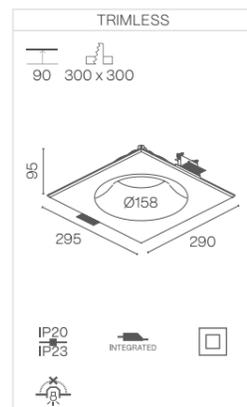

CEILING THICKNESS
10-20 mm

.03

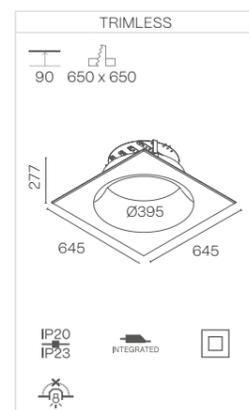

CEILING THICKNESS
13 mm

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

ESPIGA SOFT

POWER STANDARD

		.01	.02	.03
				-
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 16 W 2720 - 2767 - 2888 lm	500 mA 11 W 3272 - 3876 - 4172 lm
Opal	2700 K	660EB6W112 ✖	660EE6W112 ✖	660EH6W112 ✖
	3000 K	660EB6W113 ✖	660EE6W113 ✖	660EH6W113 ✖
	4000 K	660EB6W115 ✖	660EE6W115 ✖	660EH6W115 ✖

POWER HIGH

		.01	.03
			-
		350 mA 12 W 1784 - 1820 - 1866 lm	500 mA 22 W 6544 - 7752 - 8344 lm
Opal	2700 K	660EB6W312 ✖	660EH6W312 ✖
	3000 K	660EB6W313 ✖	660EH6W313 ✖
	4000 K	660EB6W315 ✖	660EH6W315 ✖


POWER GU5.3

		.01
		Max. 8 W LED
-		660EB6W400X

POWER GU10

		.01
		Max. 8 W LED
.GU		660EB6W500X

Opal




The data shown corresponds to raw values.

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Down light


.01

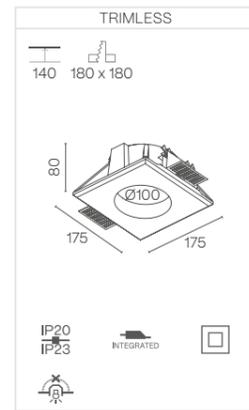

.02

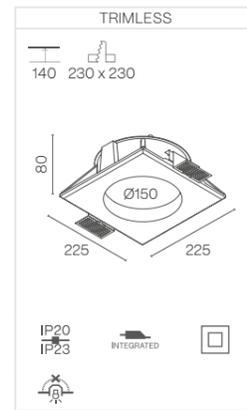


.03

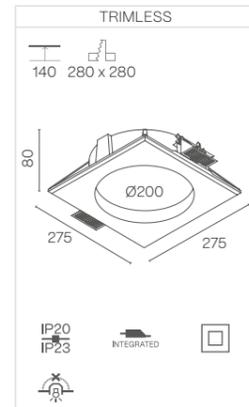

↑ CEILING THICKNESS
10-20 mm

Cut-away detail

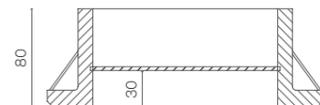

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

POWER STANDARD

		.01	.02	.03
		BPM50	BPM3181	BPM200
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
Opal	2700 K	610EB6W112 ✖	610EE6W112 ✖	610EH6W112 ✖
	3000 K	610EB6W113 ✖	610EE6W113 ✖	610EH6W113 ✖
	4000 K	610EB6W115 ✖	610EE6W115 ✖	610EH6W115 ✖

POWER HIGH

		.01		
		BPM300		
		350 mA 12 W 1784 - 1820 - 1866 lm		
Opal	2700 K	610EB6W312 ✖		
	3000 K	610EB6W313 ✖		
	4000 K	610EB6W315 ✖		


POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
-		610EB6W400X

POWER GU10

		.01
		GU10
		Max. 8 W LED
.GU		610EB6W500X

Opal




The data shown corresponds to raw values.

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Down light

ESPIGA SQ


.01

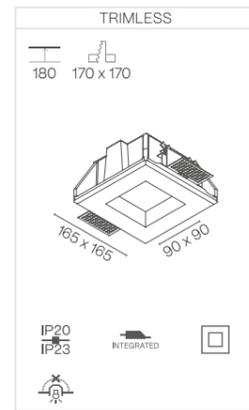

.02

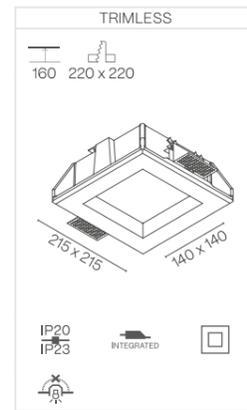


.03

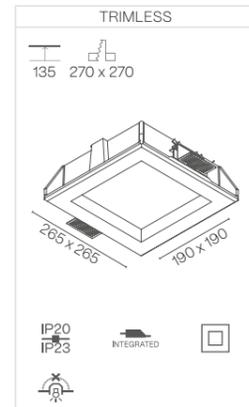

CEILING THICKNESS
10-20 mm

Cut-away detail

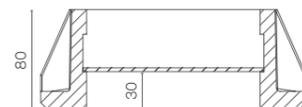

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ESPIGA SQ

POWER STANDARD

		.01	.02	.03
		BPM50	BPM3181	BPM200
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
Opal	2700 K	614EB6W112 ✖	614EE6W112 ✖	614EH6W112 ✖
	3000 K	614EB6W113 ✖	614EE6W113 ✖	614EH6W113 ✖
	4000 K	614EB6W115 ✖	614EE6W115 ✖	614EH6W115 ✖

POWER HIGH

		.01		
		BPM300		
		350 mA 12 W 1784 - 1820 - 1866 lm		
Opal	2700 K	614EB6W312 ✖		
	3000 K	614EB6W313 ✖		
	4000 K	614EB6W315 ✖		


POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
-		614EB6W400X

POWER GU10

		.01
		GU10
		Max. 8 W LED
.GU		614EB6W500X

Opal




The data shown corresponds to raw values.

- DIMM OPTIONS**
- On-Off
 - Dali
 - Push
 - 1.10v


Down light

ESPIGA SIRIO


.01

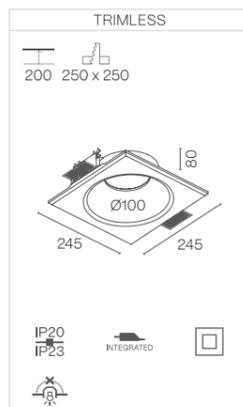

.02

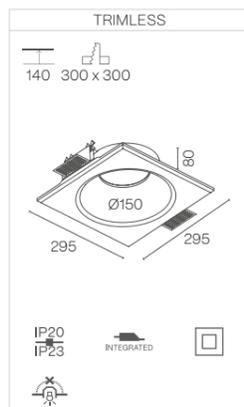


.03

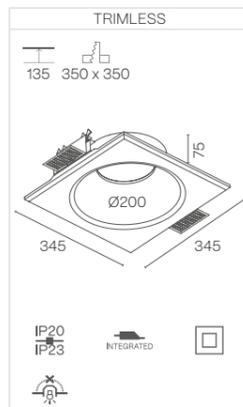

CEILING THICKNESS
10-20 mm

Cut-away detail

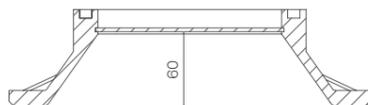

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

ESPIGA SIRIO

POWER STANDARD

		.01	.02	.03
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
Opal	2700 K	612EB6W112 ✖	612EE6W112 ✖	612EH6W112 ✖
	3000 K	612EB6W113 ✖	612EE6W113 ✖	612EH6W113 ✖
	4000 K	612EB6W115 ✖	612EE6W115 ✖	612EH6W115 ✖

POWER HIGH

		.01		
		350 mA 12 W 1784 - 1820 - 1866 lm		
Opal	2700 K	612EB6W312 ✖		
	3000 K	612EB6W313 ✖		
	4000 K	612EB6W315 ✖		


POWER GU5.3

		.01
		Max. 8 W LED
-		612EB6W400X

POWER GU10

		.01
		Max. 8 W LED
.GU		612EB6W500X

Opal



The data shown corresponds to raw values.


DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Down light



ORBIT FAMILY



CRISMOSIL

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL



INTEGRATED




220-240 V
50-60 Hz



ORBIT

.01

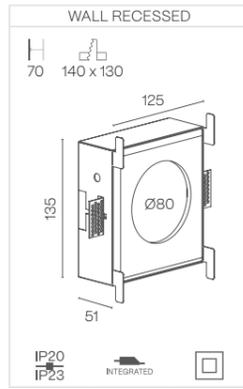

POWER STANDARD

		.01	
Opal	700 mA	2 W 202 - 233 - 251 lm	
	2700 K	641EB7W112 ✖	
	3000 K	641EB7W113 ✖	
	4000 K	641EB7W115 ✖	

The data shown corresponds to raw values.


Cut hole
 Minimum height of the false ceiling

✖ DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v

Down light
LUMINAIRE INCLUDES
 Recessed mounting kit

ORBIT ARA


.01

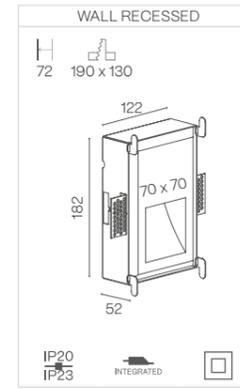

POWER STANDARD

		.01	
25°	700 mA	2 W 202 - 233 - 251 lm	
	2700 K	642EB7W142 ✖	
	3000 K	642EB7W143 ✖	
	4000 K	642EB7W145 ✖	

Cut-away detail



The data shown corresponds to raw values.


Cut hole
 Minimum height of the false ceiling

✖ DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v


Down light
LUMINAIRE INCLUDES
 Recessed mounting kit

ORBIT NADIR


.00

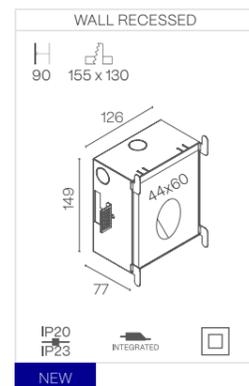


.01

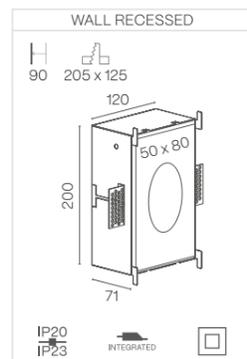

.02

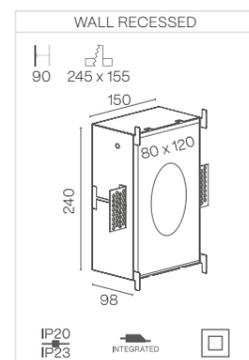

Cut-away detail

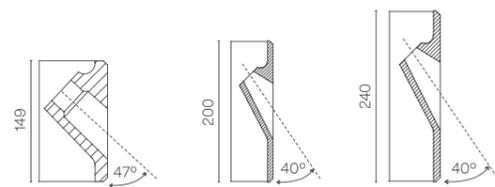

- Cut hole
- Minimum height of the false ceiling

POWER STANDARD

		.00	.01	.02
25°	700 mA	2,5 W 202 - 233 - 251 lm	2,5 W 202 - 233 - 251 lm	2,5 W 202 - 233 - 251 lm
	2700 K	640EA7W142 ✖	640EB7W142 ✖	640EE7W142 ✖
	3000 K	640EA7W143 ✖	640EB7W143 ✖	640EE7W143 ✖
	4000 K	640EA7W145 ✖	640EB7W145 ✖	640EE7W145 ✖

The data shown corresponds to raw values.

✖ DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Down light

LUMINAIRE INCLUDES
Recessed mounting kit




DRACO FAMILY




- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

DRACO


.00

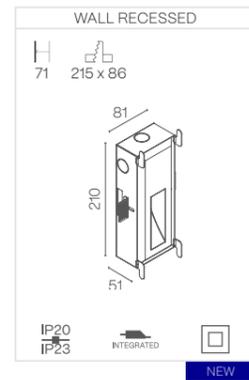

.01

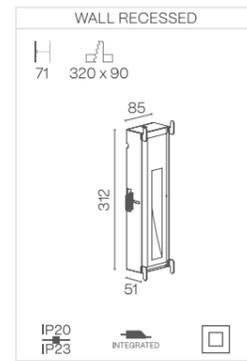


.02

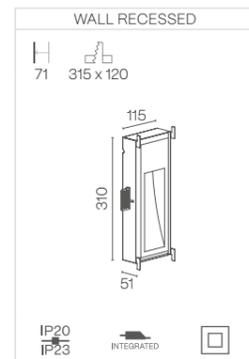

POWER STANDARD

		.00	.01	.02
25°	700 mA	2,5 W 202 - 233 - 251 lm	2,5 W 202 - 233 - 251 lm	2,5 W 202 - 233 - 251 lm
	2700 K	605EA7W142 ✖	605EB7W142 ✖	605EE7W142 ✖
	3000 K	605EA7W143 ✖	605EB7W143 ✖	605EE7W143 ✖
	4000 K	605EA7W145 ✖	605EB7W145 ✖	605EE7W145 ✖

Cut-away detail

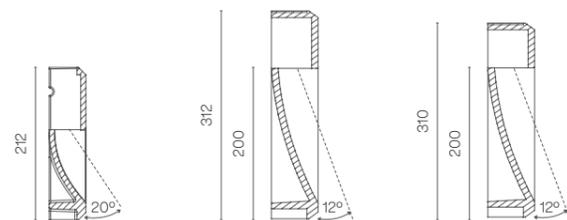

The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling

- ✖ DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
Recessed mounting kit

DRACO ORION

.01

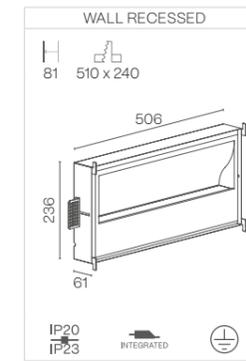


POWER STANDARD

		.01
25°	500 mA	8 W 1227 - 1454 - 1565 lm
	2700 K	606EB7W142 ✖
	3000 K	606EB7W143 ✖
	4000 K	606EB7W145 ✖

POWER HIGH

		.01
25°	500 mA	17 W 2454 - 2907 - 3129 lm
	2700 K	606EB7W342 ✖
	3000 K	606EB7W343 ✖
	4000 K	606EB7W345 ✖

Cut-away detail



The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling

- ✖ DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v


- Up light
- LUMINAIRE INCLUDES**
Recessed mounting kit

DRACO WALL ORION


.01

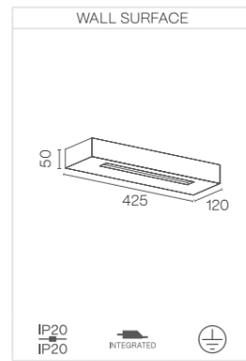

.02

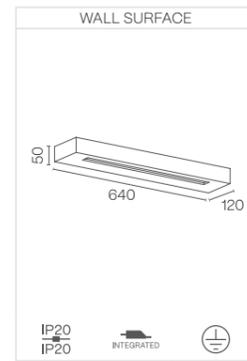

.03

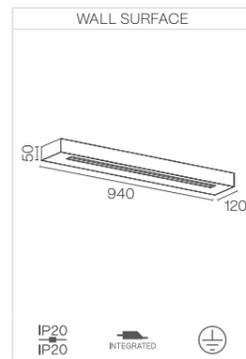

LUMINAIRE INCLUDES
Wall surface mounting kit

DRACO WALL ORION

POWER STANDARD

		.01	.02	.03
Opal	500 mA	12 W 1636 - 1938 - 2086 lm	24 W 3272 - 3876 - 4172 lm	36 W 4908 - 5814 - 6258 lm
	2700 K	662EB7W112 ✖	662EE7W112 ✖	662EH7W112 ✖
	3000 K	662EB7W113 ✖	662EE7W113 ✖	662EH7W113 ✖
	4000 K	662EB7W115 ✖	662EE7W115 ✖	662EH7W115 ✖

POWER HIGH

		.01	.02	.03
Opal	500 mA	24 W 3272 - 3876 - 4172 lm	48 W 6544 - 7752 - 8344 lm	72 W 9816 - 11628 - 12516 lm
	2700 K	662EB7W312 ✖	662EE7W312 ✖	662EH7W312 ✖
	3000 K	662EB7W313 ✖	662EE7W313 ✖	662EH7W313 ✖
	4000 K	662EB7W315 ✖	662EE7W315 ✖	662EH7W315 ✖

The data shown corresponds to raw values.


✖ DIMM OPTIONS

- · On-Off
- D · Dali
- P · Push
- V · 1.10v


Up/down light

DRACO TUCANA

.01

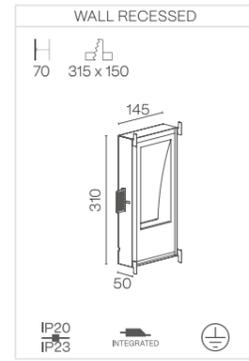

.02

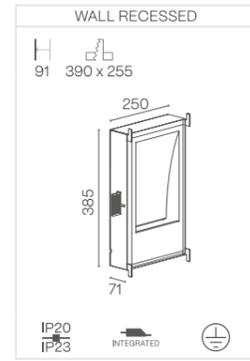


POWER STANDARD

		.01	.02
Opal		500 mA 3 W 409 - 421 - 438 lm	500 mA 3 W 409 - 485 - 522 lm
	2700 K	607EB7W112 ✖	607EE7W112 ✖
	3000 K	607EB7W113 ✖	607EE7W113 ✖
	4000 K	607EB7W115 ✖	607EE7W115 ✖

POWER HIGH

		.01	.02
Opal		700 mA 4 W 555 - 571 - 593 lm	500 mA 6 W 818 - 969 - 1043 lm
	2700 K	607EB7W312 ✖	607EE7W312 ✖
	3000 K	607EB7W313 ✖	607EE7W313 ✖
	4000 K	607EB7W315 ✖	607EE7W315 ✖

Cut-away detail

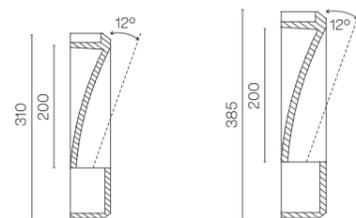

The data shown corresponds to raw values.


Cut hole
 Minimum height of the false ceiling

✖ DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v


Up light
LUMINAIRE INCLUDES
 Recessed mounting kit

DRACO ZAHARA

.01

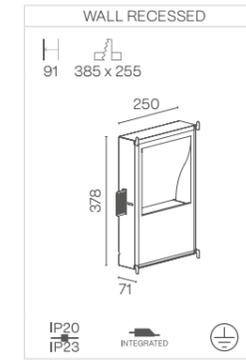

.02

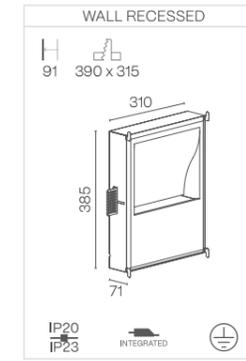


POWER STANDARD

		.01	.02
Opal		500 mA 3 W 409 - 485 - 522 lm	3 W 409 - 485 - 522 lm
	2700 K	608EB7W112 ✖	608EE7W112 ✖
	3000 K	608EB7W113 ✖	608EE7W113 ✖
	4000 K	608EB7W115 ✖	608EE7W115 ✖

POWER HIGH

		.01	.02
Opal		500 mA 6 W 818 - 969 - 1043 lm	6 W 818 - 969 - 1043 lm
	2700 K	608EB7W312 ✖	608EE7W312 ✖
	3000 K	608EB7W313 ✖	608EE7W313 ✖
	4000 K	608EB7W315 ✖	608EE7W315 ✖

Cut-away detail

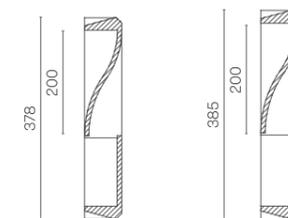

The data shown corresponds to raw values.

Cut hole
 Minimum height of the false ceiling

✖ DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v

Up light
LUMINAIRE INCLUDES
 Recessed mounting kit

TYRA FAMILY



CRISMOSIL

CRI
≥90

IK06

LIFE
50000h

DIM
OPTIONAL



INTEGRATED




INDOOR

220-240 V
50-60 Hz




TYRA


.01

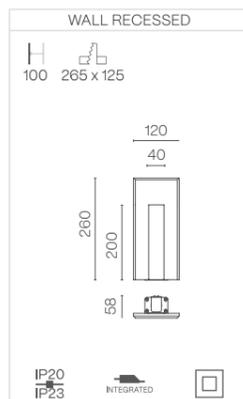

.02

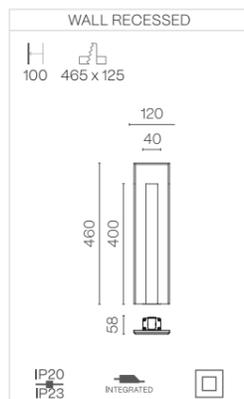

.03

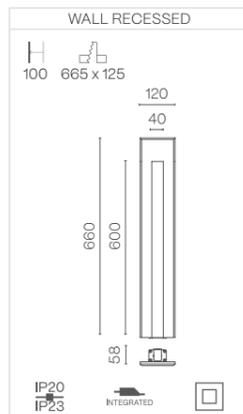

- Cut hole
- Minimum height of the false ceiling

LUMINAIRE INCLUDES
Recessed mounting kit

TYRA

POWER STANDARD

		.01	.02	.03
25°	700 mA	2 W 237 - 246 - 261 lm	2 W 237 - 246 - 261 lm	2 W 237 - 246 - 261 lm
	2700 K	652EB7W142 ✖	652EE7W142 ✖	652EH7W142 ✖
	3000 K	652EB7W143 ✖	652EE7W143 ✖	652EH7W143 ✖
	4000 K	652EB7W145 ✖	652EE7W145 ✖	652EH7W145 ✖

The data shown corresponds to raw values.


✖ DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Down light

TYRA LYRA


.01

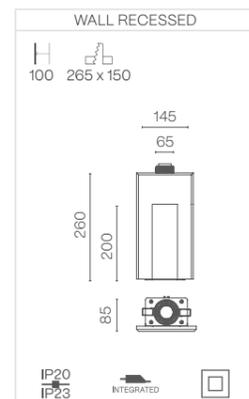

.02

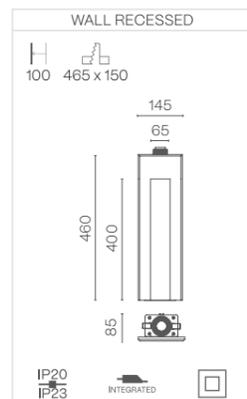

.03

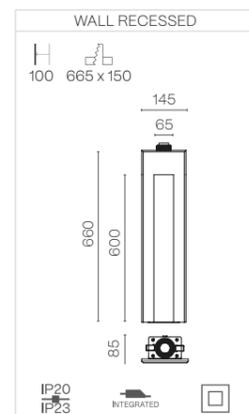

- Cut hole
- Minimum height of the false ceiling

LUMINAIRE INCLUDES
Recessed mounting kit

TYRA LYRA

POWER STANDARD

		.01	.02	.03
Opal	350 mA	6 W 502 - 537 - 580 lm	6 W 502 - 537 - 580 lm	6 W 502 - 537 - 580 lm
	2700 K	624EB7W112	624EE7W112	624EH7W112
	3000 K	624EB7W113	624EE7W113	624EH7W113
	4000 K	624EB7W115	624EE7W115	624EH7W115

POWER HIGH

		.01	.02	.03
Opal	500 mA	9 W 713 - 750 - 825 lm	9 W 713 - 750 - 825 lm	9 W 713 - 750 - 825 lm
	2700 K	624EB7W312	624EE7W312	624EH7W312
	3000 K	624EB7W313	624EE7W313	624EH7W313
	4000 K	624EB7W315	624EE7W315	624EH7W315

The data shown corresponds to raw values.

DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


Down light

TECHNICAL INFORMATION


INFORMACIÓN TÉCNICA




CONNECTION BOXES

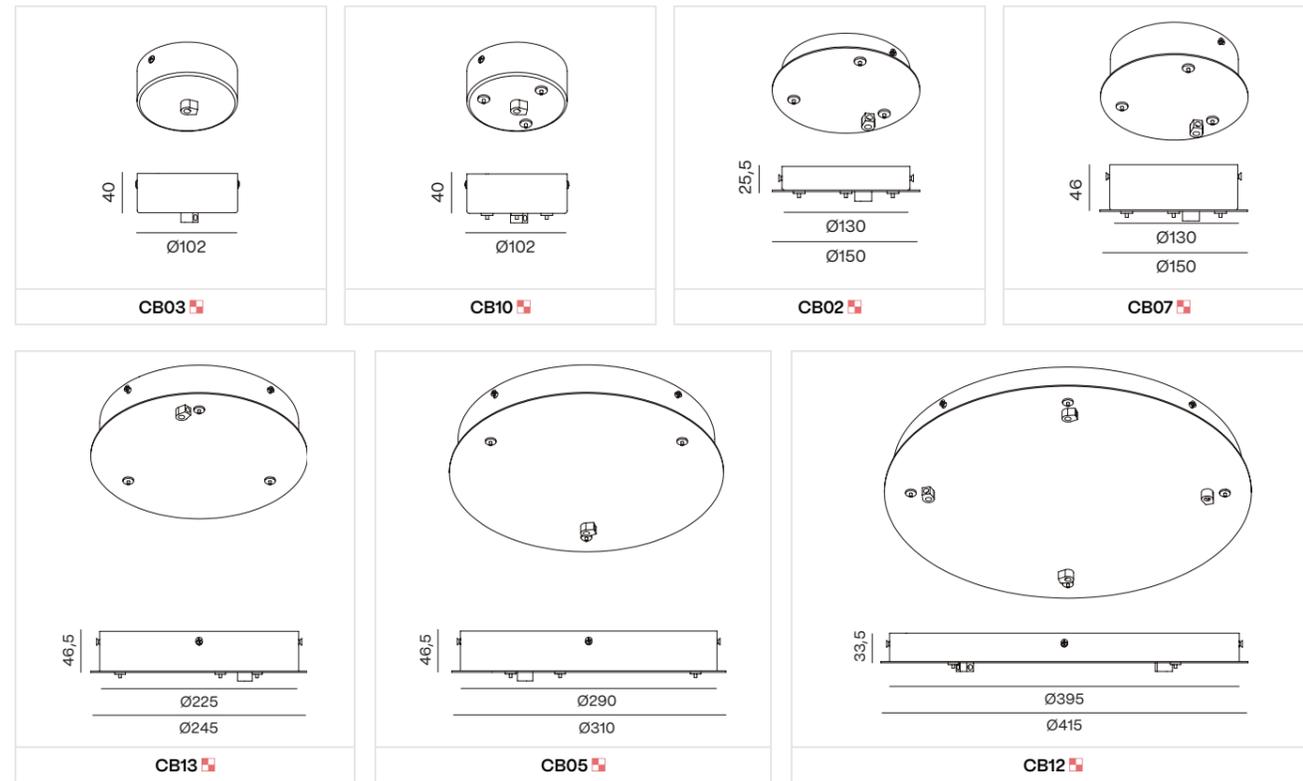

CONNECTION & DRIVER BOXES

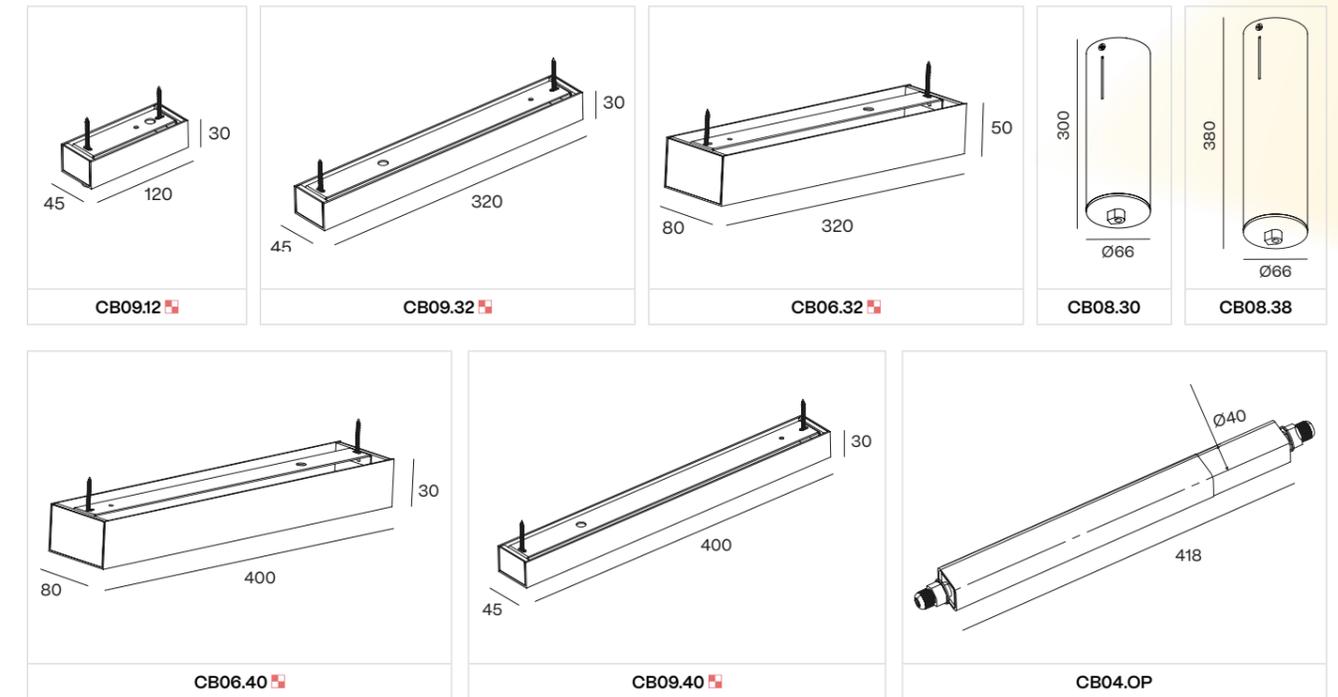


CONNECTION BOXES

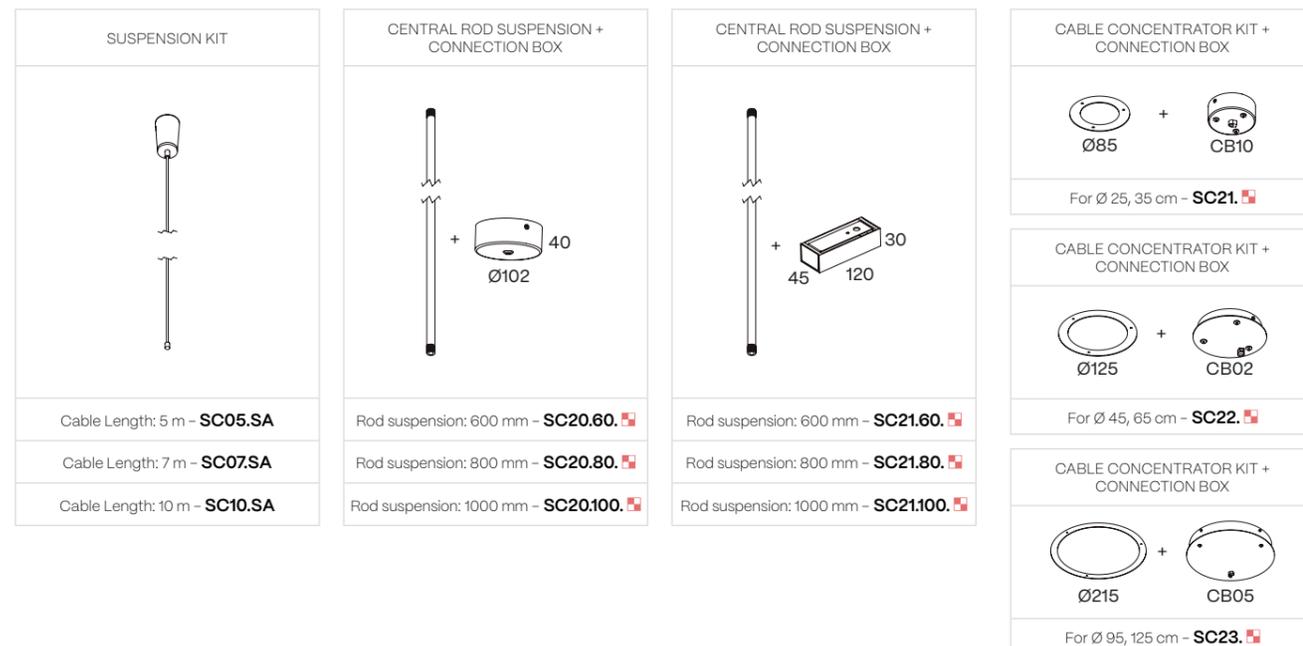

FINISH
B · Black
W · White
S · Special color

INDIVIDUAL CEILING FOR RECESSED ACCESORIES

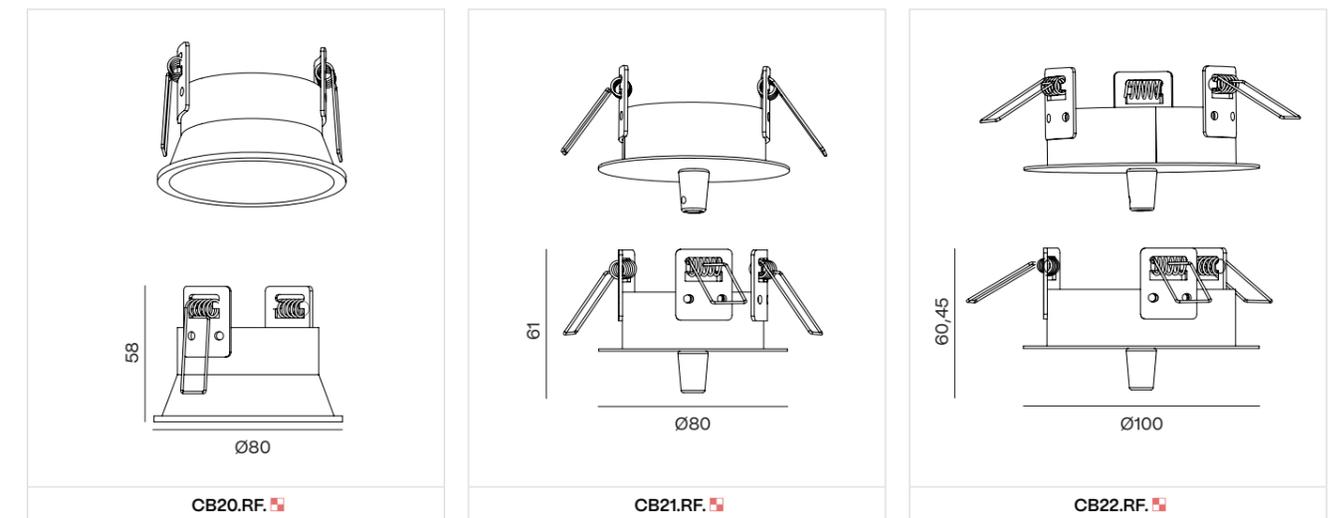

Check luminaire's compatibility.

FINISH
B · Black
W · White
S · Special color

ICON FLASH


LEYENDA PICTOGRAMAS

- Circular cut
Agujero de corte circular
- Rectangular cut
Agujero de corte rectangular
- Luminaire not suitable to be covered with thermal insulating material
Luminaria no adecuada para cubrirse con aislante térmico
- Minimum height of the false ceiling
Altura mínima del falso techo
- Luminaire's total length
Longitud total de la luminaria
- Rotation degrees
Grados de giro
- Tilting degree
Grados de basculación
- Luminaire with two different IP degrees of protection at the top and bottom
Grado IP de la luminaria tanto por la parte superior e inferior del empotramiento de la luminaria
- Luminaire is made of aluminum
Luminaria fabricada de aluminio
- Luminaire is made of aluminum and silicone
Luminaria fabricada de aluminio y silicona
- Luminaire is handmade with Crismosil™ material and is designed to have a smooth finish on the front and a raw finish on the back
Luminaria fabricada a mano con material Crismosil™, diseñada para tener un acabado liso en la parte frontal, mientras que el reverso es en bruto
- Luminaire is made out of cement
La luminaria está fabricada con cemento
- Unified Glare Rating
Índice de Deslumbramiento Unificado
- Protection rate against external mechanical impacts
Grado de resistencia contra golpes mecánicos externos
- Luminaire's Lifetime
Vida útil de la luminaria
- Optional dimmer
Regulador opcional
- Driver remote
Driver remoto
- Driver integrated inside the luminaire
Driver integrado dentro de la luminaria

- Only for indoor use
Solo para uso interior
- Only for outdoor use
Solo para uso exterior
- AC input for luminaire is 220-240V / 50-60Hz
Input AC de luminaria a 220-240V/50-60Hz
- Class I: Luminaire in which the protection against electric shocks falls into a protective conductor grounded
Clase I: Luminaria en que la protección contra los choques eléctricos recae a un conductor de toma tierra
- Class II: Luminaire in which the protection against electric shocks includes additional safety features such as double insulation or reinforced insulation
Clase II: Luminaria en que la protección contra los choques eléctricos, comprende medidas de seguridad suplementarias, tales como el doble aislamiento o el aislamiento reforzado
- Class III: Luminaire in which the protection against electric shocks falls on the power supply with very low safety voltage (SELV) and in which no voltages higher than the very low safety voltage are generated
Clase III: luminaria en la que la protección contra los choques eléctricos recae en la alimentación con muy baja tensión de seguridad (MTBS) y en la que no se generan tensiones superiores a la muy baja tensión de seguridad
- According to european directives and EN 60598
Conforme a las directivas europeas y la norma EN 60598
- Lamp not included
Lámpara no incluida
- According to European directives and EN 60598, do not dispose of with household waste
Conforme a las directivas europeas y la norma EN 60598, no desechar con la basura doméstica
- Mini LED Bulb / Lamp
Bombilla LED Mini
- Standard LED Bulb / Lamp
Bombilla LED Estándar
- High Power LED Lamp
Bombilla LED de Alta Potencia
- Spherical LED Lamp
Bombilla LED Esférica
- Reflector LED Lamp
Bombilla LED Reflectora
- GX8.5 HID Bulb
Bombilla de descarga GX8.5
- GU5.3 (MR16) Bulb
Bombilla GU5.3 (MR16)
- GU10 Bulb
Bombilla GU10

CREATE A REFERENCE ORDER

COMO CREAR LA REFERENCIA

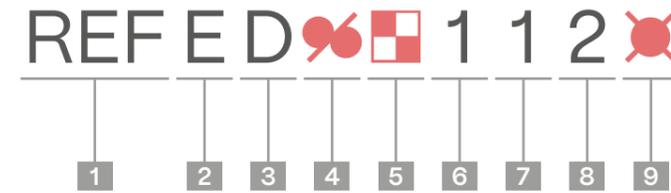

1 REFERENCIA PRODUCTO

3 Dig. Numéricos

REFERENCIA PRODUCTO
3 Dig. Numéricos

2 MERCADO

1 Dig. Alfabético

MERCADO
1 Dig. Alfabético

N EEUU
E EUROPA
S SUDAMÉRICA
O OTROS

3 DIMENSIÓN

1 Dig. Alfabético

DIMENSIÓN
1 Dig. Alfabético

A	.00	.1	
B	.01	.25	.2
C		.35	.3
D		.45	.4
E	.02	.30-65	.5
F		.65	.6
G			.7
H	.03	.30-95	.8
I		.95	.9
J	.04	.30-125	.10
K		.125	.12
L	.05		.14
M		.150	.15
N	.06	.600	.16
O			.125090
P	.07		.18
Q			.125180
R	.08	.200	.20
S			.22
T	.09	.250	
U			
V	.10		
W	.11	.300	
X		.350	
Y		.400	
Z		.500	

4 INSTALACIÓN

1 Dig. Numérico/Alfanumérico

INSTALACIÓN
1 Dig. Numérico/Alfanumérico

	IP20	IP44/ IP54	IP65
PENDANT	1	0	I
PENDANT UPLIGHT	2	A	J
SURFACE	3	B	K
SURFACE UPLIGHT	4	C	L
RECESSED	5	D	M
TRIMLESS	6	E	N
WALL	7	F	O
WALL UPLIGHT	8	G	P
TRACKLINE / MD	9	H	Q
PENDANT TRACK		R	

5 ACABADO

1 Dig. Alfanumérico

ACABADO
1 Dig. Alfanumérico

B	BLACK
W	WHITE
S	SPECIAL COLOR
G	BLACK - WHITE
H	WHITE - BLACK
I	WHITE - SPECIAL COLOR
J	BLACK - SPECIAL COLOR
K	SPECIAL COLOR - WHITE
L	SPECIAL COLOR - BLACK
A	STRIPED ALUMINIUM

6 POTENCIA

1 Dig. Numérico

POTENCIA
1 Dig. Numérico

1	STANDARD
2	MEDIUM
3	HIGH
4	GU5.3
5	GU10
6	GX8.5
7	CDMR
0	NO POWER

7 DIFUSOR/APERTURA

1 Dig. Numérico

DIFUSOR/APERTURA
1 Dig. Numérico

1	OPAL - SILICONA - <11
2	MICROPRISMATICO - 11 - 15
3	TRANSPARENTE - SKY - 16 - 24
4	25 - 33
5	34 - 43
6	44 - 55
7	>55
8	
9	
0	(GU)

8 TEMP. COLOR

1 Dig. Numérico/Alfanumérico

TEMPERATURA DE COLOR
1 Dig. Numérico/Alfanumérico

	CRi90	CRi80	CRi95
<2700K	1	A	I
2700K	2	B	J
3000K	3	C	K
3500K	4	D	L
4000K	5	E	M
TW	6	F	N
DW	7	G	O
RGBW	8	H	P
P30	Q		
P40	R		
GU	0		

9 DIMADO

1 Dig. Alfabético

DIMADO
1 Dig. Alfabético

O	ON-OFF
D	DALI
P	PUSH
V	1.10v
F	PHASE CUT
C	CONTROLLED
X	(GU)

ACOUSTIC ACCESORIES.....	454	ALARIK NANO PATRICIA SHAPE	181	ALBERTA INSIDE	80
ACOUSTIC ALABAMA	430	ALARIK NANO PATRICIA ZOOM.....	181	ALBERTA INSIDE HAT	64
ACOUSTIC ALABAMA SQ.....	430	ALARIK NANO WALL WASHER	180	ALBERTA INSIDE VERTICAL.....	82
ACOUSTIC ALARIK SLIM	432	ALARIK SLIM	166	ALBERTA INSIDE VTILT	82
ACOUSTIC ALBA.....	438	ALARIK SLIM DOT	168	ALBERTA OUTSIDE	76
ACOUSTIC ALBA MINI	436	ALARIK SLIM LED BALL	168	ALBERTA SLIGHT	92
ACOUSTIC ALBERTA SOFT.....	428	ALARIK SLIM LED MODULES.....	167	ALBERTA SLIGHT CONNECT	52
ACOUSTIC ALZIRA.....	448	ALARIK SLIM LED TUBE.....	168	ALBERTA SLIGHT ECCENTRIC	68
ACOUSTIC KLIMT FIX	450	ALARIK SLIM LENSES.....	169	ALBERTA SOFT.....	88
ACOUSTIC KLIMT FIX SQ	450	ALARIK SLIM LUMINAIRE	156	ALBERTA SOFT CONNECT	48
ACOUSTIC LAMBDA.....	442	ALARIK SLIM MOTION LENSES	168	ALBERTA SOFT LOOP	60
ACOUSTIC LINGGO MINI.....	444	ALARIK SLIM PATRICIA	169	ALBERTA SOFT OUTSIDE	72
ADIMA	418	ALARIK SLIM PATRICIA ZOOM.....	169	ALBERTA SOFT STONE.....	56
ADIMA SQ.....	418	ALARIK SLIM ROUND.....	170	ALDAIA	348
ALABAMA.....	124	ALBA DOUBLE.....	224	ALDAIA SQ.....	349
ALABAMA LOOP	120	ALBA LINGGO	232	ALZIRA.....	256
ALABAMA SLIGHT	128	ALBA LINGGO MINI	228	ASTRA.....	322
ALABAMA SLIGHT SQ	132	ALBA MINI	196	CAN REVIEW	342
ALABAMA SLIM.....	136	ALBA MINI AIO.....	200	CAN REVIEW IP65.....	344
ALABAMA STONE.....	116	ALBA MINI MODULIGHT	204	CATLI.....	362
ALABAMA SUPER SLIM	140	ALBA MINI MODULIGHT LED MODULES.....	207	CATLI CLASSIC.....	368
ALABAMA SUPER SLIM TILT.....	142	ALBA MINI MODULIGHT LENSES	206	CATLI CLASSIC SQ	369
ALARIK MINI	172	ALBA MINI MODULIGHT MINI TUBE.....	205	CATLI HALKA.....	370
ALARIK MINI LED MODULES.....	173	ALBA PLUS.....	220	CATLI SQ.....	364
ALARIK MINI LENSES	174	ALBA PRO	214	CATLI SQ DOUBLE.....	366
ALARIK MINI MOTION LENSES.....	174	ALBA PRO CRISMOSIL	496	CUBE.....	298
ALARIK MINI PATRICIA.....	174	ALBA PRO CRISMOSIL MODULE LENSES.....	497	CUBE DOUBLE	298
ALARIK MINI PATRICIA FLAT.....	175	ALBA PRO CRISMOSIL MODULE LIGHT.....	497	CUBE TRIPLE.....	298
ALARIK MINI PATRICIA LOL	175	ALBA PRO CRISMOSIL SPOTLIGHT.....	496	CUBE TUBE.....	300
ALARIK MINI PATRICIA ZOOM.....	175	ALBA PRO CRISMOSIL SPOTLIGHT STICK...	496	CUBE TUBE MOVE.....	302
ALARIK MINI PATRICIA ZOOM.....	175	ALBA PRO CRISMOSIL SPOTLIGHT STICK...	496	DRACO	546
ALARIK MINI ROUND	176	ALBA PRO MODULE LENSES.....	216	DRACO ORION.....	547
ALARIK MINI ROUND LENSES	175	ALBA PRO MODULE LIGHT	216	DRACO TUCANA.....	550
ALARIK NANO	178	ALBA PRO SPOTLIGHT.....	215	DRACO WALL ORION.....	548
ALARIK NANO DOUBLE	182	ALBA PRO SPOTLIGHT STICK.....	215	DRACO ZAHARA.....	551
ALARIK NANO ESFERA	180	ALBA WING.....	210	ESPIGA	532
ALARIK NANO LED MODULES	179	ALBERTA.....	96	ESPIGA	532
ALARIK NANO LENSES COMPACT	180	ALBERTA DUE	84	ESPIGA SIRIO.....	536
ALARIK NANO PATRICIA FLIP	181	ALBERTA DUE MOVE.....	86	ESPIGA SOFT	530



ESPIGA SQ.....	534	MARTORELL MINI CRATE TRIPLE	276	TYRA.....	554
FACE IRIS.....	396	MARTORELL MOVE.....	268	TYRA LYRA.....	556
FACE KIERA	398	MARTORELL SQ.....	278	VADI.....	352
FACE KIERA CEMENT	400	MARTORELL SQ DOUBLE.....	278	VAULT	242
FACE TUBULAR.....	392	MARTORELL TÁRREGA	280	VEGA	520
FACE TUBULAR SPAC	394	MARTORELL TUBE MOVE	272	VEGA ADHARA	522
FLAT	406	MARTORELL TUBULAR 20.....	282	VEGA TWINS	524
FLAT SLIM	406	MARTORELL TUBULAR 40.....	282	VEGA ZETA	526
FLORIDA	106	MARTORELL TUBULAR 60.....	282	VENISE	388
FLORIDA DECO.....	102	MARTORELL TUBULAR TILT	282	VIO	326
FLORIDA SQ	110	MENORCA DEEP STRAIGHT.....	488	VIO ASYMETRIC.....	326
FLY	236	MENORCA DEEP TILT	489	VIO COMPACT.....	326
GALANTA BONETE	380	MENORCA DEEP WAVE.....	490	VIO DEEP.....	326
GALANTA DEEP.....	378	MENORCA EDGE.....	491	VIO DEEP MOVE.....	326
HURY.....	408	MENORCA FLAT	492	VIO DOME.....	326
IKI	410	MENORCA WHASER.....	493	VIO DOME MOVE	326
KAPI	412	NUVOL	470	VIO MOVE	326
KLEE	419	OHIO	146	VIO SQ.....	326
KLEE SQ	419	OHIO SQ.....	150	VIO SQ MOVE	326
KLIMT	292	OKKIA	250	WALL ARA OUT.....	460
KLIMT FIX.....	294	OKKIA PLUS	250	WALL DRACO OUT	464
KONI.....	356	ORACLE	312	WALL ZAHARA OUT	462
KONI DEEP	358	ORBIT	540	WAVE	476
KONI TURTA	359	ORBIT ARA.....	541	WAVE DOME	479
KUU	414	ORBIT NADIR	542	WAVE SOFT.....	478
LENT MODULAR.....	316	PATRICIA.....	286	ZENIT	502
LENT MOTION	318	ROY.....	338	ZENIT DEEP	504
LUK CRUSADER	306	SAND	482	ZENIT DEEP TWINS	506
LUK HAWKEYE	307	SASSY.....	332	ZENIT MOVE.....	507
LUK HAWKEYE DOUBLE	307	SASSY OVAL HOLE	332	ZENIT MOVE SQ.....	508
MAGRIT	418	SASSY ROUND HOLE.....	332	ZENIT ORTO	509
MARTORELL	270	SASSY SNOOT	332	ZENIT RING.....	503
MARTORELL CRATE.....	274	SASSY SQ.....	334	ZENIT SIDEREA	510
MARTORELL CRATE DOUBLE.....	274	SUBLIM.....	384	ZENIT SIDEREA ASYMETRIC.....	512
MARTORELL CRATE TRIPLE.....	274	TRACKLIGHT LINEAR SYSTEM.....	188	ZENIT SQ.....	514
MARTORELL FLIP.....	266	TRACKLIGHT LUMINARIES.....	187	ZENIT STONE	515
MARTORELL MINI CRATE.....	276	TRACKLIGHT SPOTLIGHTS.....	189	ZENIT ZUBIA.....	516
MARTORELL MINI CRATE DOUBLE	276	TRACKLINE.....	186	ZENIT ZUBIA SQ	517

WARRANTY CONDITIONS

CONDICIONES DE GARANTÍA

BPM Lighting guarantees its luminaires, as well as the equipment it distributes.

Upon establishment of the legal warranty, BPM Lighting extends this warranty to cover manufacturing defects of the supplied luminaires for a period of 5 years from the invoice date.

The determination of the product defect will be made at the sole discretion of BPM Lighting, considering the overall performance of the product.

A decrease in light flux is a natural phenomenon throughout the LED's lifespan and is, therefore, not covered by the warranty.

1. WARRANTY TERMS & CONDITIONS

The limited conventional warranty is applicable only when:

1. The products are stored, installed, used, and maintained according to the technical specifications indicated on the product label (with special reference to voltage and operating temperature), the mounting instructions provided with it, and the information indicated in the respective catalogues or on the website.
2. Installation and maintenance tasks are performed by qualified technicians.
3. The reported defect affects the product's functionality.
4. The product has not been modified, altered, or treated in any way, with chemicals or otherwise, without prior written authorization from BPM Lighting.
5. The product subject to warranty, if required by BPM Lighting, must be available for further technical analysis for the necessary time to carry it out.
6. The defect has been communicated to BPM Lighting in writing, via email, within 30 days from the date of receipt of the products (in the case of visible defects) or after their verification (in the case of hidden defects), including a photographic proof of the silver label on the product. For claims related to breakages, incorrect references, or quantities, you have 10 days to submit a claim. Any claim for breakages must be documented on the delivery receipt from the shipping agency.

When sending material for a claim, it is essential that the accompanying documentation is attached to the package to avoid rejection of the material, and the reason for the claim, article reference, quantity, date, and invoice number must be indicated.

In the event that BPM Lighting acknowledges the defect, it will choose at its discretion whether to repair or replace the defective product or component with the same product or an equivalent one, taking into account the technical evolution of the products and their components.

Any technical intervention or replacement (partial or complete) of the product carried out under the warranty will not in any case give the right to an extension or renewal of the warranty beyond the stipulated years from the invoice date. The repair or replacement of the product recognized as defective by BPM Lighting does not include the costs or expenses of materials or labour for disassembly, uninstallation, assembly,

or installation. BPM Lighting is not liable and will not reimburse any consequential loss or indirect, compensatory, or other damages suffered as a result of a defective product, such as, but not limited to, assembly costs, on-site installation costs, potential downtime costs, loss of profits, or the overall costs incurred by the purchasers.

2. WARRANTY CANCELLATION CLAUSES

This conventional warranty does not cover:

1. Labor costs and expenses, equipment and warehouse costs, or any other additional costs related to and/or derived from any necessary intervention to repair the defect (such as, but not limited to, assembly, disassembly, and transportation of defective equipment, to be repaired or new products, which will be at the exclusive expense of the customer).
2. Electrical components subject to wear and tear, comparable to consumables (such as lamps, batteries, sensors, etc.).
3. Interruptions resulting from impulsive disturbances (surges) exceeding the limits set by IEC 61000-4-5 and IEC 61547 standards.
4. Potential remote-control systems (photocells, telecontrol modules, gateways, etc.) not supplied with the luminaire.
5. Plastic parts, such as polycarbonate or PMMA, subject to natural aging.
6. Product damage due to negligence, transportation, and unforeseen and unpredictable events not within normal use conditions as per section 1.1 (e.g., electrical discharges and lightning strikes).
7. Products that have switched on for more than 6,500 hours per year.
8. Luminaires not used for its intended purpose.
9. BPM Lighting shall not be held liable under any circumstances for accidental, compensatory, consequential, indirect, special, or other damages. BPM Lighting's liability for a product defect is strictly limited to the actual amount paid for the defective product.

This conventional warranty is the only warranty provided by BPM Lighting and is granted with the exclusion of other warranties, explicit or implied, such as, for example, warranties of merchantability or fitness for a particular purpose. The exclusive remedies available to the buyer for any non-conformity or defect in a product are those provided for by this warranty. The performance and lifespan of LEDs are not guaranteed if the luminaires have been installed in environments containing chemicals incompatible with the LEDs. Our technical department is available to verify the compatibility of the LEDs we use in relation to the substances present in the environment where the luminaires are installed.



WARRANTY CONDITIONS

CONDICIONES DE GARANTÍA

BPM Lighting garantiza sus luminarias, así como los equipos que distribuye.

Establecida la garantía legal, BPM Lighting extiende dicha garantía sobre los defectos de fabricación de las luminarias suministradas durante un período de 5 años a partir de la fecha de la factura. La determinación del defecto del producto la realizará BPM Lighting a su única discreción, considerando el rendimiento general dado por el producto. La depreciación del flujo luminoso es un fenómeno previsto durante la vida útil del LED y, por lo tanto, no está cubierto por la garantía.

1. CONDICIONES DE GARANTÍA

La garantía convencional limitada es aplicable solo cuando:

1. Los productos se almacenan, instalan, utilizan y mantienen según las especificaciones técnicas indicadas en el marcado del producto (con especial referencia a la tensión y a la temperatura de funcionamiento), a las instrucciones de montaje facilitadas con el mismo, a lo que se indica en los respectivos catálogos o en web.
2. La instalación y mantenimiento son ejecutados por personal técnico cualificado.
3. El defecto señalado perjudica las funciones del producto.
4. El producto no ha sido modificado, alterado o tratado en ningún modo, con agentes químicos o de cualquier otra manera, sin autorización previa y escrita de BPM Lighting
5. El producto objeto de la garantía, si así lo requiere BPM lighting, debe estar a disposición para más análisis técnicos durante el tiempo necesario para su realización.
6. El defecto ha sido comunicado a BPM Lighting por escrito, mediante correo electrónico antes de 30 días a partir de la fecha de recepción de los productos (en caso de defectos aparentes) o tras su verificación (en caso de defectos no visibles) mediante el envío de una prueba fotográfica de la etiqueta plateada presente en el producto. Para las incidencias por roturas, referencias erróneas o cantidades incorrectas, dispone de un plazo de 10 días para su reclamación. La reclamación por roturas deberá quedar documentada en el justificante de entrega de la agencia de transporte.

En el envío del material de incidencia, es imprescindible que la documentación vaya adjunta al bulto para que el material no sea rechazado, e indicar el motivo de la incidencia, referencia de artículos, cantidad, fecha y número de factura.

En el caso de que BPM Lighting reconozca el defecto, elegirá de manera discrecional si reparar o sustituir el producto o componente defectuoso con el mismo producto o con uno equivalente, teniendo en consideración la evolución técnica de los productos y la de sus componentes. Cualquier intervención técnica o sustitución (parcial o completa) del producto realizada en el marco de la garantía no dará derecho en ningún caso a una prórroga o renovación de la garantía más allá de los años estipulados a partir de la fecha de la factura.

La reparación o sustitución del producto reconocido como defectuoso por BPM Lighting no incluye los costes o gastos de material o de personal por el desmontaje, desinstalación,

montaje o instalación. BPM Lighting no es responsable y, por lo tanto, no reembolsará ninguna pérdida consecuenta o daño indirecto, compensatorio o de otra naturaleza sufrida a causa de un producto defectuoso, como, a modo de ejemplo y no exhaustivo, los costes de ensamblaje, los costes de instalación in situ, los posibles costes por parada de la planta, la pérdida de ganancias y los costes totales de los compradores.

2. CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Esta garantía convencional no cubre:

1. Costes y gastos de mano de obra, costes y gastos de equipamiento y almacén, así como cualquier otro coste adicional relativo y/o derivado de cualquier intervención necesaria para reparar el defecto (tales como, pero no limitados a, costes/gastos de montaje, desmontaje y transporte de equipos defectuosos, a reparar o productos nuevos, que correrán a cargo exclusivo del cliente);
2. Componentes eléctricos sujetos a desgaste asimilables a consumibles (como lámparas, pilas, sensores, etc.).
3. Interrupciones resultantes de perturbaciones impulsivas (sobretensiones) superiores a los requisitos de la norma IEC 61000-4-5 y IEC 61547.
4. Posibles sistemas de control remoto (fotocélulas, módulos de telecontrol, pasarelas, etc.) no suministrados con la luminaria.
5. Piezas de plástico, como por ejemplo polycarbonato o PMMA, sometidas a envejecimiento natural.
6. Daños del producto debidos a negligencia, al transporte y a eventos imprevistos e imprevisibles que no entren en las condiciones normales de uso según el punto 1.1 (por ej.: descargas eléctricas y rayos).
7. Productos que hayan estado en funcionamiento durante un número de horas al año superior a 6.500 h.
8. Luminarias no utilizadas con el propósito para el que se han realizado.
9. BPM Lighting no será responsable en ningún caso de daños accidentales, de compensación, consecuentes, indirectos, especiales u otros daños. La responsabilidad de BPM Lighting respecto a un defecto del producto debe quedar limitada en todo caso a la suma pagada por ese producto defectuoso.

Esta garantía convencional es la única garantía otorgada por BPM Lighting y se concede con exclusión de las demás garantías, explícitas o implícitas como, por ejemplo, garantías de comerciabilidad o adecuación para un propósito particular. Las medidas adoptadas de forma exclusiva por parte del comprador para cualquier no conformidad o defecto en un producto serán sólo las previstas por esta garantía. Las prestaciones y la duración de los LEDs no están garantizadas si las luminarias se han instalado en tornos con presencia de sustancias químicas incompatibles con los mismos LEDs. Nuestro departamento técnico está a disposición para comprobar la compatibilidad de los LEDs que utilizamos en relación con las sustancias presentes en el entorno donde se instalan las luminarias.

SALES CONDITIONS

CONDICIONES DE VENTA

GENERAL TERMS AND CONDITIONS OF SALE

All orders must be placed with BPM Iluminación S.L in writing by email, and customers hereby accept the terms and conditions detailed below. Goods supplied by the Company shall remain the property of BPM Iluminación S.L until payment is received, even if the goods have been sold to a third party. Delivery times are approximate and non-binding. BPM Iluminación S.L will not accept claims for damages due to late delivery.

BPM Iluminación S.L reserves the right to amend, supplement or delete, without prior warning, the characteristics or designs of the products in this catalogue, as well as the corresponding prices. Therefore, customers are advised to contact BPM Iluminación S.L directly for the latest information.

BPM Iluminación S.L is not responsible for any issues caused by the loss or damage of goods during transportation by the carrier. In accordance with Article 1 of Royal Decree 5/1997 of 14 January, complaint forms are available to our customers at the Company's registered office.

CANCELLING AN ORDER

Orders must be cancelled in writing and sent to BPM Iluminación S.L by email. If the order has already been dispatched, please request a refund, in accordance with the terms and conditions detailed in the following section.

RETURNING GOODS BPM

Lighting reserves the right to accept or reject return requests received. Returns must be made within 2 weeks of the invoice date, and a minimum depreciation rate of 15% will be applied to cover handling costs.

Depending on the state of conservation of the luminaire, this percentage might be increased.

RETURN TERMS AND CONDITIONS

Return requests must be made in writing by email. Please send all returns correspondence to the email address info@bpmighting.com, stating, at the very least, the reason for the return, article reference number(s), quantity, item condition, date and invoice number. If the return is authorised:

The item must be returned in its original packaging and in perfect condition. BPM Iluminación S.L must receive the goods within a maximum of 10 days after the return has been authorised. Any costs for returning the goods are the responsibility of the customer. Returned goods will not be accepted in the case of discontinued or customised items, any RAL other than black and white, line systems and acoustic products.

Please send the item, together with the documentation required by the Sales Department, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain. It is essential that the return authorization is attached to the package so that the material is not rejected.

WARRANTY

BPM Iluminación S.L guarantees its luminaires, as well as the equipment it distributes.

Upon establishment of the legal warranty, BPM Iluminación S.L extends this warranty to cover manufacturing defects of the supplied luminaires for a period of 5 years from the invoice date. The determination of the product defect will be made at the sole discretion of BPM Iluminación S.L, considering the overall performance of the product.

A decrease in light flux is a natural phenomenon throughout the LED's lifespan and is, therefore, not covered by the warranty.

WARRANTY TERMS AND CONDITIONS

The limited conventional warranty is applicable only when:

1. The products are stored, installed, used, and maintained according to the technical specifications indicated on the product label (with special reference to voltage and operating temperature), the mounting instructions provided with it, and the information indicated in the respective catalogues or on the website.
2. Installation and maintenance tasks are performed by qualified technicians.
3. The reported defect affects the product's functionality.
4. The product has not been modified, altered, or treated in any way, with chemicals or otherwise, without prior written authorization from BPM Iluminación S.L.
5. The product subject to warranty, if required by BPM Iluminación S.L, must be available for further technical analysis for the necessary time to carry it out.

6. The defect has been communicated to BPM Iluminación S.L in writing, via email, within 30 days from the date of receipt of the products (in the case of visible defects) or after their verification (in the case of hidden defects), including a photographic proof of the silver label on the product.

When sending material for a claim, it is essential that the accompanying documentation is attached to the package to avoid rejection of the material, and the reason for the claim, article reference, quantity, date, and invoice number must be indicated.

In the event that BPM Iluminación S.L acknowledges the defect, it will choose at its discretion whether to repair or replace the defective product or component with the same product or an equivalent one, taking into account the technical evolution of the products and their components.

Any technical intervention or replacement (partial or complete) of the product carried out under the warranty will not in any case give the right to an extension or renewal of the warranty beyond the stipulated years from the invoice date. The repair or replacement of the product recognized as defective by BPM Iluminación S.L does not include the costs or expenses of materials or labour for disassembly, uninstallation, assembly, or installation. BPM Iluminación S.L is not liable and will not reimburse any consequential loss or indirect, compensatory, or other damages suffered as a result of a defective product, such as, but not limited to, assembly costs, on-site installation costs, potential downtime costs, loss of profits, or the overall costs incurred by the purchasers.

WARRANTY CANCELLATION CLAUSES

This conventional warranty does not cover:

1. Labor costs and expenses, equipment and warehouse costs, or any other additional costs related to and/or derived from any necessary intervention to repair the defect (such as, but not limited to, assembly, disassembly, and transportation of defective equipment, to be repaired or new products, which will be at the exclusive expense of the customer).
2. Electrical components subject to wear and tear, comparable to consumables (such as lamps, batteries, sensors, etc.).
3. Interruptions resulting from impulsive disturbances (surges) exceeding the limits set by IEC 61000-4-5 and IEC 61547 standards.
4. Potential remote-control systems (photoceles, telecontrol modules, gateways, etc.) not supplied with the luminaire.
5. Plastic parts, such as polycarbonate or PMMA, subject to natural aging.
6. Product damage due to negligence, transportation, and unforeseen and unpredictable events not within normal use conditions as per section 1.1 (e.g., electrical discharges and lightning strikes).
7. Luminaires not used for its intended purpose.
8. BPM Iluminación S.L shall not be held liable under any circumstances for accidental, compensatory, consequential, indirect, special, or other damages. BPM Iluminación S.L's liability for a product defect is strictly limited to the actual amount paid for the defective product.

This conventional warranty is the only warranty provided by BPM Iluminación S.L and is granted with the exclusion of other warranties, explicit or implied, such as, for example, warranties of merchantability or fitness for a particular purpose.

The exclusive remedies available to the buyer for any non-conformity or defect in a product are those provided for by this warranty. The performance and lifespan of LEDs are not guaranteed if the luminaires have been installed in environments containing chemicals incompatible with the LEDs. Our technical department is available to verify the compatibility of the LEDs we use in relation to the substances present in the environment where the luminaires are installed.



SALES CONDITIONS

CONDICIONES DE VENTA

CONDICIONES GENERALES DE VENTA

Todos los pedidos deberán ser formulados a BPM Iluminación S.L. por escrito vía e-mail, quedando aceptadas por el cliente las condiciones escritas a continuación. La mercancía suministrada por la Empresa, será propiedad de BPM Iluminación S.L. hasta el momento de pago, aunque dicha mercancía hubiese sido vendida a un tercero. Los plazos de entrega son aproximados y sin compromiso. BPM Iluminación S.L. no aceptará demandas por daños y perjuicios por la demora en la entrega.

BPM Iluminación S.L. se reserva el derecho de modificar, complementar o suprimir, sin previo aviso, las características o diseños de los productos presentes en este catálogo, así como sus correspondientes tarifas. Por este motivo, se recomienda al cliente ponerse en contacto directamente con BPM Iluminación S.L. para obtener una información actualizada.

BPM Iluminación S.L. no es responsable de los problemas generados por la pérdida o deterioro de la mercancía durante el transporte por agencia. De acuerdo con el art. 1 del RD 5/1997 14 Enero, existen a disposición de nuestros clientes hojas de reclamación en el domicilio social de la Empresa.

ANULACIÓN DE PEDIDOS

Las anulaciones de pedidos deberán hacerse por escrito y notificarse a BPM Iluminación S.L. vía e-mail. En caso de que el pedido ya se hubiese enviado, deberá solicitarse la devolución del mismo, acogiéndose a las condiciones detalladas en el siguiente apartado.

DEVOLUCIÓN DE MERCANCÍA

BPM Iluminación S.L. se reserva el derecho de aceptar o rechazar las solicitudes de devolución recibidas. En cualquier caso, se requerirá que no hayan transcurrido 15 días desde la fecha de la factura, y se aplicará una depreciación mínima del 15% por los costes de gestión.

Dependiendo del estado de conservación de la luminaria, este porcentaje podrá incrementarse.

CONDICIONES DE DEVOLUCIÓN

La solicitud de devolución deberá formalizarse por escrito vía e-mail. Las devoluciones deberán tramitarse en la siguiente dirección de correo: info@bpmighting.com. Deberá informar a BPM Iluminación S.L por escrito del motivo de la devolución, referencia de artículo/s, cantidad, estado del material, fecha y número de factura.

En el caso de que la devolución fuera autorizada: El material deberá devolverse en su embalaje original y en perfecto estado de conservación. BPM Iluminación S.L. deberá recibir la mercancía en un plazo máximo de 10 días desde la autorización de la devolución. Los portes de la devolución serán asumidos por el cliente. No se admitirán devoluciones de mercancía en el caso de material descatálogo, material customizado, cualquier RAL distinto al blanco y negro, líneas y productos acústicos.

Es imprescindible que la autorización de devolución se adjunte al bulto para que el material no sea rechazado. El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

GARANTÍA

BPM Iluminación S.L garantiza sus luminarias, así como los equipos que distribuye.

Establecida la garantía legal, BPM Iluminación S.L extiende dicha garantía sobre los defectos de fabricación de las luminarias suministradas durante un período de 5 años a partir de la fecha de la factura. La determinación del defecto del producto la realizará BPM Iluminación S.L a su única discreción, considerando el rendimiento general dado por el producto. La depreciación del flujo luminoso es un fenómeno previsto durante la vida útil del LED y, por lo tanto, no está cubierto por la garantía.

CONDICIONES DE GARANTÍA

La garantía convencional limitada es aplicable solo cuando:

1. Los productos se almacenan, instalan, utilizan y mantienen según las especificaciones técnicas indicadas en el marcado del producto (con especial referencia a la tensión y a la temperatura de funcionamiento), a las instrucciones de montaje facilitadas con el mismo, a lo que se indica en los respectivos catálogos o en web.
2. La instalación y mantenimiento son ejecutados por personal técnico cualificado.
3. El defecto señalado perjudica las funciones del producto.

4. El producto no ha sido modificado, alterado o tratado en ningún modo, con agentes químicos o de cualquier otra manera, sin autorización previa y escrita de BPM Iluminación S.L.
5. El producto objeto de la garantía, si así lo requiere BPM Iluminación S.L, debe estar a disposición para más análisis técnicos durante el tiempo necesario para su realización.
6. El defecto ha sido comunicado a BPM Iluminación S.L por escrito, mediante correo electrónico antes de 30 días a partir de la fecha de recepción de los productos (en caso de defectos aparentes) o tras su verificación (en caso de defectos no visibles) mediante el envío de una prueba fotográfica de la etiqueta plateada presente en el producto. Para las incidencias por roturas, referencias erróneas o cantidades incorrectas, dispone de un plazo de 10 días para su reclamación. La reclamación por roturas deberá quedar documentada en el justificante de entrega de la agencia de transporte.

En el envío del material de incidencia, es imprescindible que la documentación vaya adjunta al bulto para que el material no sea rechazado, e indicar el motivo de la incidencia, referencia de artículos, cantidad, fecha y número de factura.

En el caso de que BPM Iluminación S.L reconozca el defecto, elegirá de manera discrecional si reparar o sustituir el producto o componente defectuoso con el mismo producto o con uno equivalente, teniendo en consideración la evolución técnica de los productos y la de sus componentes. Cualquier intervención técnica o sustitución (parcial o completa) del producto realizada en el marco de la garantía no dará derecho en ningún caso a una prórroga o renovación de la garantía más allá de los años estipulados a partir de la fecha de la factura. La reparación o sustitución del producto reconocido como defectuoso por BPM Iluminación S.L no incluye los costes o gastos de material o de personal por el desmontaje, desinstalación, montaje o instalación. BPM Iluminación S.L no es responsable y, por lo tanto, no reembolsará ninguna pérdida consecuente o daño indirecto, compensatorio o de otra naturaleza sufrida a causa de un producto defectuoso, como, a modo de ejemplo y no exhaustivo, los costes de ensamblaje, los costes de instalación in situ, los posibles costes por parada de la planta, la pérdida de ganancias y los costes totales de los compradores.

CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Esta garantía convencional no cubre:

1. Costes y gastos de mano de obra, costes y gastos de equipamiento y almacén, así como cualquier otro coste adicional relativo y/o derivado de cualquier intervención necesaria para reparar el defecto (tales como, pero no limitados a, costes/gastos de montaje, desmontaje y transporte de equipos defectuosos, a reparar o productos nuevos, que correrán a cargo exclusivo del cliente);
2. Componentes eléctricos sujetos a desgaste asimilables a consumibles (como lámparas, pilas, sensores, etc.).
3. Interrupciones resultantes de perturbaciones impulsivas (sobretensiones) superiores a los requisitos de la norma IEC 61000-4-5 y IEC 61547.
4. Posibles sistemas de control remoto (fotocélulas, módulos de telecontrol, pasarelas, etc.) no suministrados con la luminaria.
5. Piezas de plástico, como por ejemplo policarbonato o PMMA, sometidas a envejecimiento natural.
6. Daños del producto debidos a negligencia, al transporte y a eventos imprevisibles e imprevisibles que no entren en las condiciones normales de uso según el punto 1.1 (por ej.: descargas eléctricas y rayos).
7. Luminarias no utilizadas con el propósito para el que se han realizado.
8. BPM Iluminación S.L no será responsable en ningún caso de daños accidentales, de compensación, consecuentes, indirectos, especiales u otros daños.

La responsabilidad de BPM Iluminación S.L respecto a un defecto del producto debe quedar limitada en todo caso a la suma pagada por ese producto defectuoso. Esta garantía convencional es la única garantía otorgada por BPM Iluminación S.L y se concede con exclusión de las demás garantías, explícitas o implícitas como, por ejemplo, garantías de comerciabilidad o adecuación para un propósito particular.

Las medidas adoptadas de forma exclusiva por parte del comprador para cualquier no conformidad o defecto en un producto serán sólo las previstas por esta garantía. Las prestaciones y la duración de los LEDs no están garantizadas si las luminarias se han instalado en tornos con presencia de sustancias químicas incompatibles con los mismos LEDs. Nuestro departamento técnico está a disposición para comprobar la compatibilidad de los LEDs que utilizamos en relación con las sustancias presentes en el entorno donde se instalan las luminarias.

CONNECTING YOUR EQUIPMENT...

CÓMO CONECTO?

DOES

When using a single driver, wire all lighting fixtures in series. LED strips must be wired in parallel.

DONT'S

Lighting fixtures must always be connected in no-voltage conditions. The driver must not be connected to the power supply when connecting the lighting fixtures. If there are intermediate connections, follow this diagram to avoid damaging your lighting fixtures. (Diagram) Lighting fixtures must not be connected directly to the AC power source without a driver. Never expose lighting fixtures to heat sources or other electronic equipment.



CONSIDERACIONES

Todas nuestras luminarias cuando usan un solo driver se cablearán en serie. Las tiras de led se deberán de cablear en paralelo entre sí.

ADVERTENCIAS

Las luminarias se deben de conectar siempre apagadas. No se debe de tener el driver conectado a la red encendido al conectar las luminarias. En caso de tener conexiones intermedias se debe de seguir el siguiente esquema para no dañar las luminarias. (Esquema) No se debe de conectar la luminaria directamente al AC sin driver. No se deben de colocar las luminarias cerca de fuentes de calor ni de otros aparatos electrónicos.

WIRING-EM CONVERTER LED BASIC WITH A STANDARD LED DRIVER AND ONE LED MODULE FOR MAIN AND EMERGENCY OPERATION

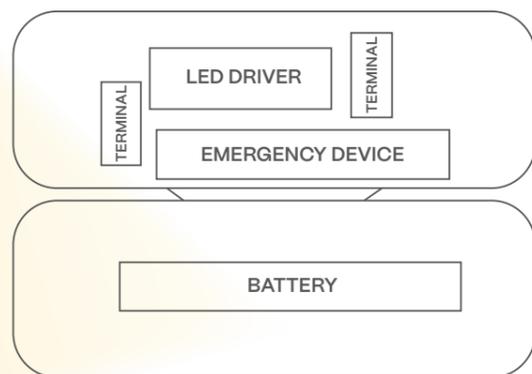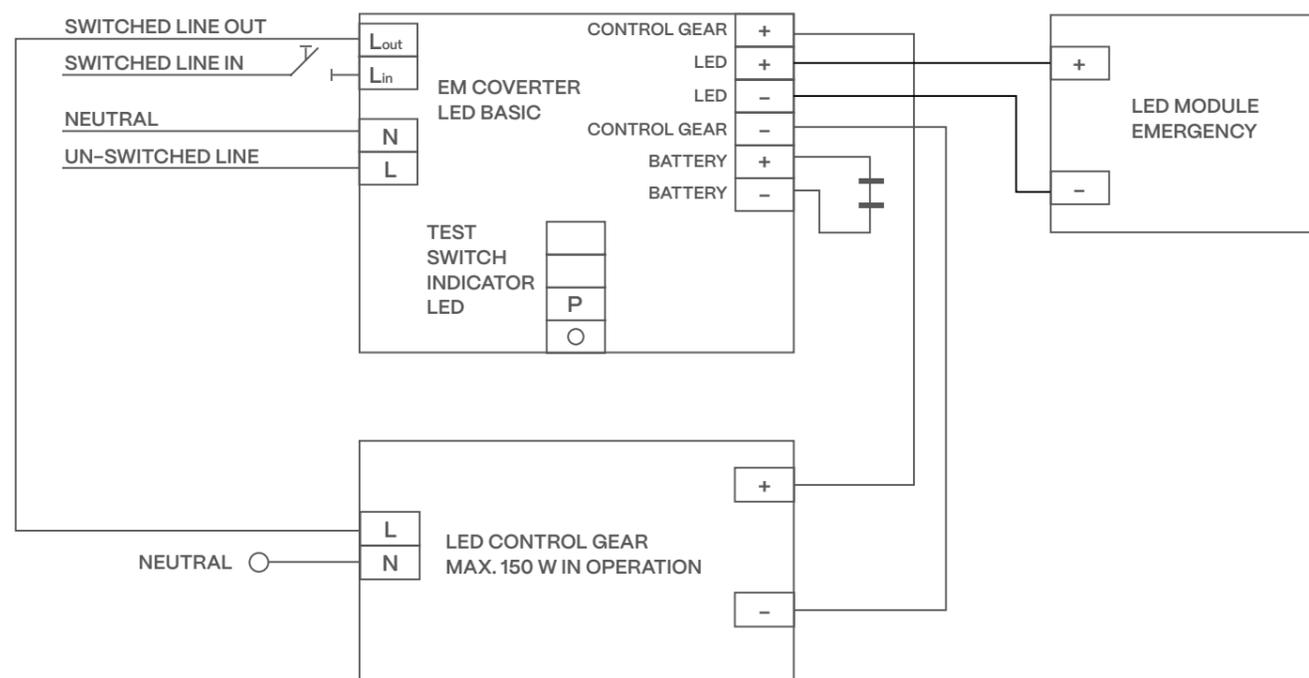

ARE BPM LIGHT FIXTURES APPROVED ACCORDING TO STANDARD?

Please note that BPM Lighting luminaires are not in any case, emergency luminaires approved according to the EN-60598-2:22. Our emergency kits provide low anti-panic lighting for between one and three hours in case of a power failure (see ref. ACKITLED1H and ref. ACKITLED3H).


¿SON LAS LUMINARIAS DE BPM HOMOLOGADAS SEGÚN LA NORMA?

Las luminarias de BPM que llevan kit de emergencia en ningún caso son luminarias de emergencia homologadas según la norma EN-60598-2-22. Los kits de emergencia suministrados permiten mantener una iluminación reducida antipánico, durante 1 o 3 horas en caso de fallos de suministro eléctrico de la red (ver ref. ACKITLED1H y ref. ACKITLED3H).

CONNECTING YOUR EQUIPMENT...

CÓMO CONECTO?

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

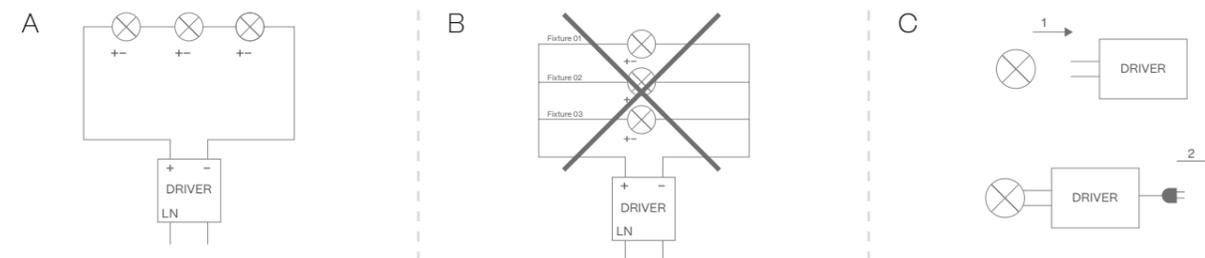

EMERGENCY KIT

There are two types of emergency lighting: Centralised and single emergency lighting

CENTRALISED EMERGENCY LIGHTING

A large battery or generator supplies energy to the emergency lighting fixtures via a specially protected power supply. In this case, the drivers have a DC recognition function that uses the input voltage to detect the emergency mode. The driver automatically turns on the DC mode and controls the light to the set DC level. The DC lighting level is generally 15% of nominal. When the installation enters DC mode, all the sensors stop working.

WHAT DO I NEED?

You only need one DC-ready driver in addition to AC-mode, which is used during normal operation of the lighting fixture. An additional battery or generally must be installed to connect the light fixture driver.

DECENTRALISED EMERGENCY LIGHTING

This does not have its own mains supply. An emergency kit consisting of emergency lighting equipment, a battery and LED indicator is required.

HOW DOES THE EMERGENCY KIT WORK?

The emergency kits supplied by BPM are for permanent use, and work normally with your driver and when the general mains network fails. The emergency kit driver detects there is voltage in the network and allows the lighting fixture driver work under normal conditions. In case of a power failure in the grid, the emergency kit driver releases the energy in the battery to power the LEDs.

WHAT DO I NEED?

You need a lighting fixture, its driver and LEDs and an emergency kit. The battery in the emergency kit must be installed separately from the lighting fixture and there must be a space to locate it.

HOW MANY EMERGENCY KITS DO I NEED?

An emergency kit can supply one driver with less than 150W. If the lighting fixture has more than one driver and full lighting is required, you need the same number as emergency kits as drivers in the light fixture. If only one kit is fitted, only the part of the lighting fixture that is associated with the driver will light up.

KIT DE EMERGENCIA

Existen dos tipos de iluminación de emergencia: Iluminación de emergencia de alimentación centralizada y descentralizada

EMERGENCIA CENTRALIZADA

Una batería grande o generador suministran la energía necesaria para la iluminación de emergencia a través de una red de suministro con una protección especial. En este caso los drivers tienen una función de reconocimiento DC que usa el voltaje de entrada para detectar el modo de emergencia. El driver automáticamente enciende el modo DC y regula la luz al nivel definido DC. Generalmente el nivel DC de iluminación es del 15% del nominal. Cuando la instalación entra en modo DC todos los sensores dejan de funcionar.

¿QUÉ NECESITO?

Sólo se necesita un driver preparado para trabajar en modo DC además de en modo AC, que será el que se use durante el funcionamiento habitual de la luminaria. La instalación debe de estar preparada con una batería o generador adicional donde conectar el driver de la luminaria.

EMERGENCIA DESCENTRALIZADA.

No cuenta con una red de alimentación propia. Se necesita de kit de emergencia compuesto por un equipo de iluminación de emergencia, una batería y un indicador LED.

¿CÓMO FUNCIONA EL KIT DE EMERGENCIA?

Los Kit de emergencia suministrados por BPM son de uso permanente, es decir, funciona normalmente con su driver y además cuando falla la red general. El driver del Kit de emergencia comprueba que hay tensión en la red dejando que el driver de la luminaria trabaje en condiciones normales de utilización. Cuando hay un fallo de suministro eléctrico en la red, el driver del kit de emergencia permite liberar la energía acumulada en la batería alimentando los LEDs.

¿QUÉ NECESITO?

Se necesita la luminaria compuesta de su driver y LEDs y un kit de emergencia. En cualquier caso, la batería de los Kit de emergencia debe de ir externa a la luminaria por lo que se debe de prever un espacio para su alojamiento

¿CUÁNTOS KIT DE EMERGENCIA NECESITO?

Con un kit de emergencia se puede dar servicio a un solo driver de potencia inferior a 150W. Si una luminaria lleva más de un driver y se requiere que se ilumine completamente se necesitarán tantos kits de emergencia como drivers lleve la luminaria. En este caso si sólo se coloca un kit se iluminará únicamente la parte de la luminaria que lleve asociado el driver con el kit de emergencia.

DIMMING OPTIONS

CÓMO REGULO?

1.10V

How does it work?

The driver generates a 1V (minimum) to 10V (maximum) analogue signal a dimmer switch controller. Dimming from 1 to 100%.

What do I need?

You need an L and N power source plus two control cables with + and - polarity and a compatible 1.10V controller. To switch off, install an ON-OFF switch with a 0.10V driver.

Can I dim the lights in more than one place?

It is not possible to control your lights from more than one point when you install a controller.

A conventional switch can be used to switch on and off from several points, but only one of them can be a dimmer.

PHASE CUT

How does it work?

Lights are dimmed by cutting the mains voltage at the beginning (leading) or the end (trailing) of the phase.

Dimming: 10/20-100% depending on driver.

The driver may make a noise when dimmed and flickering can occur at the lowest levels.

What do I need?

You only need an L and N power source. An additional control cable is not required, but a phase cut-off regulator is.

The dimmer switch must be LED compatible. Always consider the compatibility of the dimmer switch with the driver and whether it is cutting at the trailing or leading end of the phase.

The dimmer switch supplier can advise on compatibility.

Can I dim the lights in more than one place?

No. You cannot have more than one dimmer switch. You can only have one from a conventional ON-OFF switch (on and off only).

PUSH

How do they work?

The lights are dimmed with a switch, which is usually on. Press the push button quickly to turn the light on or off, and hold it in for the dimming function.

The range is from 1-5% to 100%.

Lighting may go out of synch when a single push button is used. It can usually be synchronised again by holding the button in for a specific time or using a pulse sequence determined by the driver.

What do I need?

All you need is a conventional push button without a pilot light.

No additional control pads are required.

PUSH dimmer switches require an L and N power supply plus an additional cable back to the push button. In some cases the driver

needs an additional neutral input which must be bridged with the installation neutral.

Can I control my lights from more than one push button?

You can install several push buttons in a row for multi-point control. In this case, the wire back to the button must enter each driver in parallel and must not be bridged from driver to driver.

You can connect numerous lights to a single button, but the more lights you connect, the greater the risk of loss of synchronisation. The number of devices controlled by a push button depends on the driver (ask the technical team).

DALI

How does it work?

The Digital Addressable Lighting Interface (DALI) system allows you to control each DALI device. By device, we mean the driver and the sensor (not the luminaire). It uses a low-voltage bidirectional communication protocol to send and receive messages. DALI digitally controlled by a standard lighting control protocol under the IEC 62356 standard. Control from 1-5% to 100% DALI keeps your lighting in sync.

Features:

DALI devices per BUS: 64
Number of DALI groups per BUS: 16
Number of DALI scenarios per BUS: 16
DALI Voltage: 9.5-22.5v, typically 16V
DALI system current: Max. 250 mA.
Maximum cable length: 300 m with a cross-section of 1.5 mm²

What do I need?

You need an L and N power supply plus two control signal wires. These control cables must be powered by a DALI BUS. You also need regulators with DALI protocol support.

Can I dim the lights in more than one place?

There are two options: By means of DALI panels/interfaces directly connected to the DALI BUS that consume a DALI address for each panel placed and must be programmed; or through DALI dimmer switches that are connected to 230V_{AC} and work by means of short presses to turn on/off and long presses to dim.



DIMMING OPTIONS

CÓMO REGULO?

1.10V

¿Cómo funciona?

El driver genera una señal analógica de 1V (mínimo) a 10V (máximo) que llega a un controlador que regula la intensidad lumínica. Regulación del 1 al 100%.

¿Qué necesito?

Se necesita una alimentación L y N más dos cables de control con polaridad + y - y un controlador compatible 1.10V. Si se quiere apagar se necesita colocar un regulador con ON-OFF o bien regular mediante driver 0.10V.

¿Puedo regular desde varios puntos?

No es posible regular desde varios puntos cuando se coloca un controlador. Se puede utilizar un interruptor convencional conmutado de manera que se pueda encender y apagar desde varios puntos pero sólo uno de ellos podrá regular.

CORTE DE FASE

¿Cómo funciona?

La regulación se realiza mediante corte de la onda de la tensión de red al inicio (leading) o al final (trailing) de la fase.

Regulación: 10/20-100% dependiendo del driver.

Puede generar ruido en el driver y al regular la intensidad al mínimo puede general flickering.

¿Qué necesito?

Sólo necesita alimentación L y N. No necesita cable adicional de control, pero sí un regulador de corte de fase.

El regulador debe de ser compatible con LED. Se debe de tener en cuenta la compatibilidad del regulador con el driver y si es corte por trailing o leading. Dicha compatibilidad la dará el proveedor del regulador.

¿Puedo regular desde varios puntos?

No se puede regular desde varios puntos. Sólo se puede regular desde un punto y conmutar el ON-OFF desde el interruptor convencional (sólo para encender y apagar).

PUSH

¿Cómo funciona?

Regulación a través de un pulsador normalmente abierto. La regulación se realiza con pulsaciones cortas para apagar/encender y una pulsación mantenida para el control de la intensidad lumínica. Regulación del 1-5% al 100%.

Puede aparecer desincronización en la regulación de las luminarias con un solo pulsador. Se suele re-sincronizar generalmente con una pulsación mantenida durante un tiempo determinado o con una secuencia de pulsación determinada según el driver.

¿Qué necesito?

Se requiere de pulsadores convencionales sin piloto de luz y no necesita ningún tipo de pastilla de regulación adicional.

La regulación PUSH necesita de alimentación L y N más un cable adicional de vuelta al pulsador. En algunos casos el driver

puede necesitar una entrada adicional de neutro que debe de puentearse con el neutro de la instalación.

¿Puedo regular desde varios puntos?

Es posible colocar varios pulsadores en paralelo para control desde varios puntos. En este caso, el cable de vuelta al pulsador debe entrar a cada driver en paralelo y no se debe de puentear de un driver a otro.

Es posible colocar varios equipos a un mismo pulsador, pero a mayor cantidad de equipos mayor riesgo de desincronización.

El número de equipos soportados por un pulsador dependerá del driver (Consultar con el equipo técnico).

DALI

¿Cómo funciona?

El sistema de regulación DALI (Digital Addressable Lighting Interface) permite el control de cada dispositivo DALI. Se entiende por dispositivo el driver y el sensor (no la luminaria). Utiliza un protocolo de comunicación bidireccional de bajo voltaje que permite enviar y recibir mensajes.

Se regula de forma digital mediante un protocolo estándar de control de iluminación bajo el estándar IEC 62356. Regulación del 1-5% al 100%

Con DALI se evita cualquier tipo de desincronización.

Características:

Dispositivos DALI por cada BUS: 64
Cantidad de grupos DALI por cada BUS: 16
Cantidad de escenas DALI por cada BUS: 16
Tensión DALI: 9.5-22.5v, normalmente 16V
Corriente del sistema DALI: máx. 250mA.
Máxima longitud del cable: 300m con una sección transversal de 1.5mm²

¿Qué necesito?

Necesita alimentación L y N más dos cables de señal de control. Estos cables de control deben de estar alimentados mediante un BUS DALI.

Además, son necesarios reguladores que deben de indicar su compatibilidad con protocolo DALI.


¿Puedo regular desde varios puntos?

Existen dos opciones: Mediante paneles/interfaces DALI conectados directamente al BUS DALI que consumen una dirección DALI por cada panel colocado y que deben de ser programados; o a través de interruptores reguladores DALI que van conectados a 230V_{AC} y funcionan mediante pulsaciones cortas para encender/apagar y pulsaciones mantenidas para regular.


TECH RECOMENDATIONS

RECOMENDACIONES TÉCNICAS


PUSH: OPTION 1

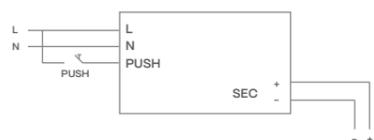


PUSH: OPTION 2

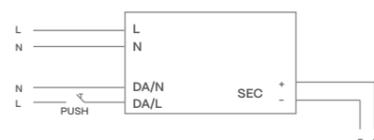

DALI

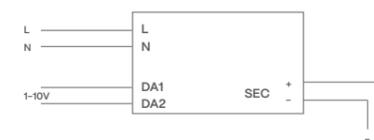

1-10 V

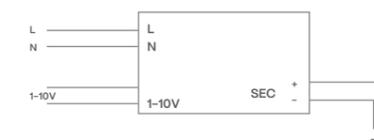

PHASE CUT



IP DEGREE OF PROTECTION

GRADO DE PROTECCIÓN IP

As IEC 60529 standard says, the IP protection degree specifies the different protection levels provided by the containers that protect the components in electrical or electronic equipment. The greater the IP protection degree, the more protected the equipment is. An IP XY protection degree indicates the following:

Según la Norma IEC 60529, el grado de protección IP especifica los diferentes niveles de protección aportados por los contenedores que resguardan los componentes de los equipos eléctricos o electrónicos. Cuanto mayor es el grado de protección IP, más protegido está el equipamiento. Un grado de protección IP XY indica lo siguiente:

X: Describes the level of protection against dust and other particles

X: Describe el nivel de protección contra polvo y otras partículas

X	PROTECTION GRADE AGAINST DUST	GRADO DE PROTECCIÓN CONTRA POLVO
0	Without protection	Sin protección
1	Protected against solids bigger than 50 mm	Protegida contra sólidos de más de 50 mm
2	Protected against solids bigger than 12 mm	Protegida contra sólidos de más de 12 mm
3	Protected against solids bigger than 2,5 mm	Protegida contra sólidos de más de 2,5 mm
4	Protected against solids bigger than 1 mm	Protegida contra sólidos de más de 1 mm
5	Protection against the entrance of dust	Protegida contra la entrada de polvo
6	Full protected against dust	Totalmente protegida del polvo

Y: Describes the level against liquids

Y: Describe el nivel de protección contra líquidos



Y	PROTECTION GRADE AGAINST LIQUIDS	GRADO DE PROTECCIÓN CONTRA LÍQUIDOS
0	Without protection	Sin protección
1	Protected against drops of water falling vertically	Protegida contra la caída vertical de gotas de agua
2	Protected against drops of water falling at a maximum inclination of 15°	Protegida contra la caída de gotas de agua con inclinación máxima de 15°
3	Protected against sprayed water	Protegida contra agua pulverizada
4	Protected against splashes of water	Protegida contra las proyecciones de agua
5	Protected against jets of water	Protegida contra los chorros de agua
6	Protected against high tide	Protegida contra mar gruesa
7	Protected against plunging effects	Protegida contra los efectos de la inmersión
8	Protected against long immersion	Protegida contra la inmersión prolongada

*Specialized cleaning procedures are not covered by IP ratings. It is recommended that manufacturers provide, if necessary, adequate information regarding cleaning procedures. This is in accordance with the recommendations contained in IEC 60529 for special cleaning procedures.

*Los procedimientos especializados de limpieza no están cubiertos por los grados de protección IP. Se recomienda que los fabricantes suministren, si es necesario, una adecuada información en lo referente a los procedimientos de limpieza. Esto está de acuerdo con las recomendaciones contenidas en la Norma IEC 60529 para los procedimientos de limpieza especiales.

TECH RECOMENDATIONS

RECOMENDACIONES TÉCNICAS

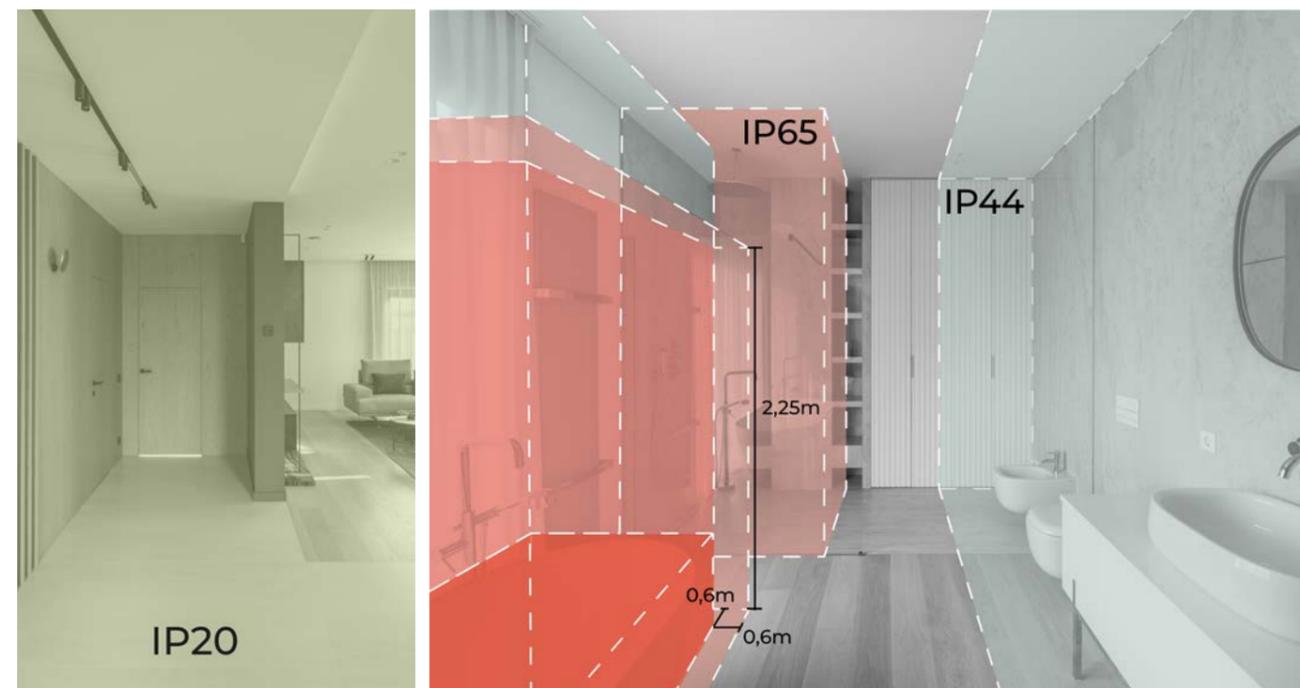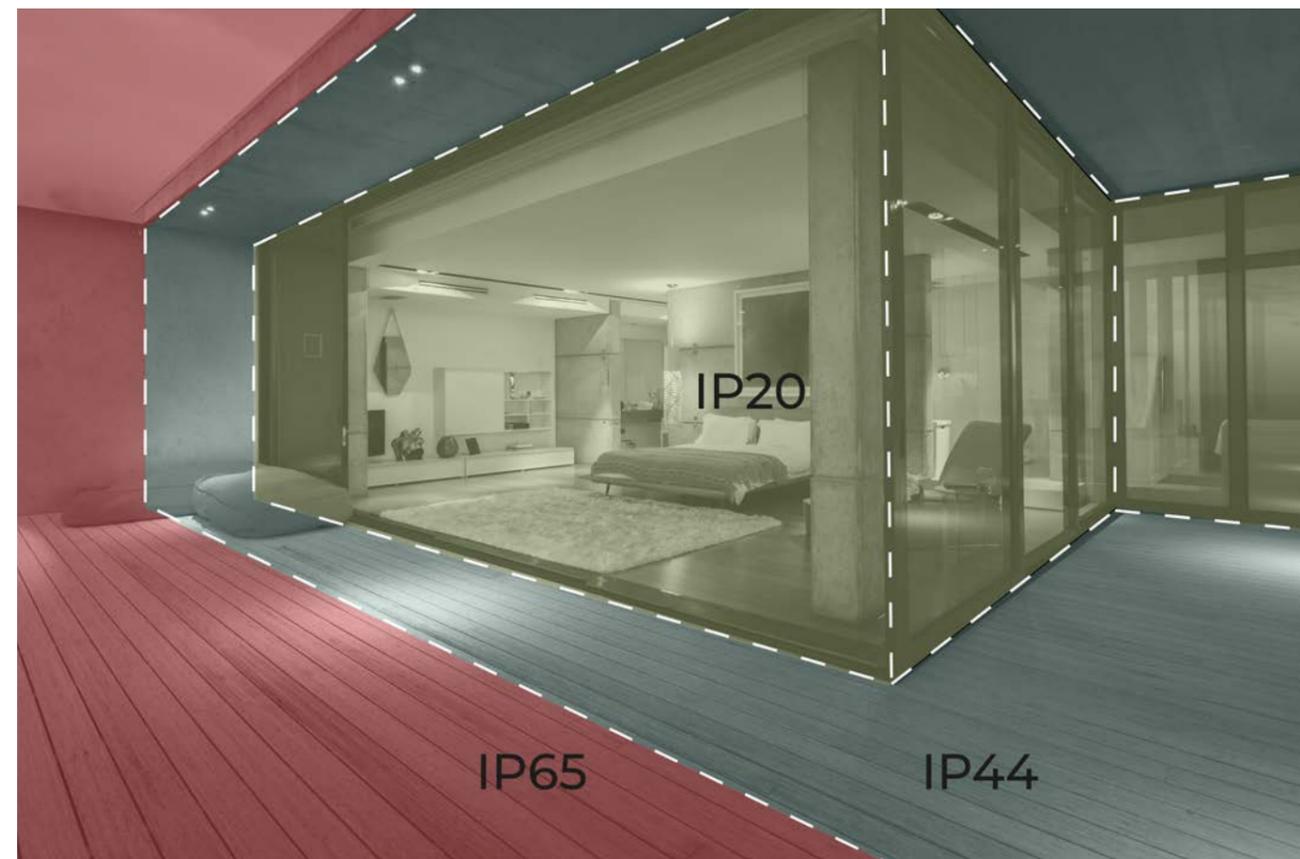



SCAN TO FIND OUT MORE DETAIL ABOUT OUR PRODUCTS.
ESCANEA Y DESCUBRE TODO SOBRE NUESTROS PRODUCTOS.

BPM Lighting S.L. reserves the right to reproduce total or partially this catalogue as Copyright owner.

The content is up to date at the day of print, nevertheless, due to continuous product development and improvement, BPM Lighting reserves the right to alter it without prior notice.

Last catalogue version in bpmlighting.com
Design and layout BPM Lighting Team

BPM Lighting S.L. se reserva el derecho de reproducción total o parcial de este catálogo como propietario del Copyright.

El contenido está actualizado en la fecha de impresión, sin embargo, debido al continuo desarrollo y mejora de los productos, BPM Lighting se reserva el derecho de modificarlo sin previo aviso.

*Última versión de catálogo en bpmlighting.com
Diseño y maquetación Equipo BPM Lighting*

